




Configuration Results

Product: 440G-MT47047

Description: Guard Locking Switch - 440G-MT
Solenoid: Solenoid Voltage: 24V
AC/DC, Contacts(Safety and
Aux): 2 Normally Closed, 2
Normally Open, Actuator: Fully-
Flex, Conduit Entry: 1/2 in NPT
Adapter

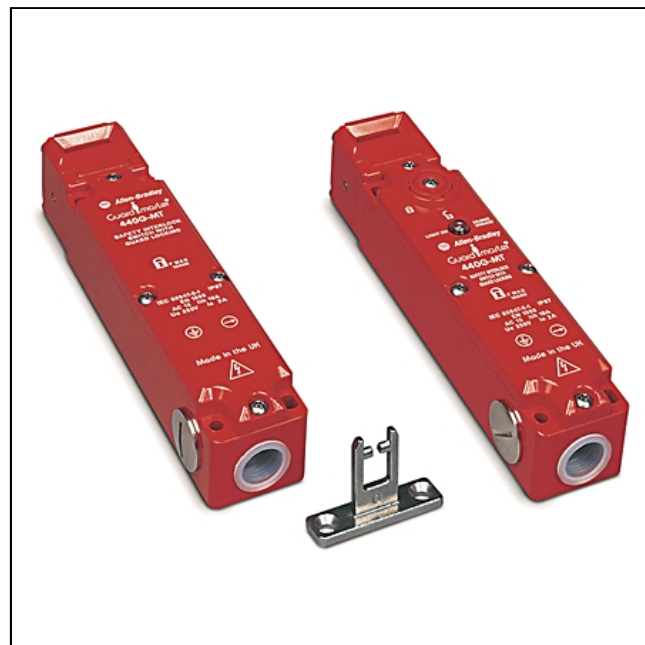

Representative Photo Only (actual product may vary based on configuration selections)

Selected Components

Selected Components

Catalog Number	Qty	Product Description	Supplementary Documents
440G-MT47047	1	Guard Locking Switch - 440G-MT Solenoid: Solenoid Voltage: 24V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 2 Normally Open, Actuator: Fully-Flex, Conduit Entry: 1/2 in NPT Adapter	• Product Details and Certifications • Photo • 2-Dimensional Drawing (DWG/DXF) • 3-Dimensional STEP model (STP)

Contact your [Rockwell Automation Distributor or sales representative](#) for local pricing.

Modify

Cancel

E Mail