


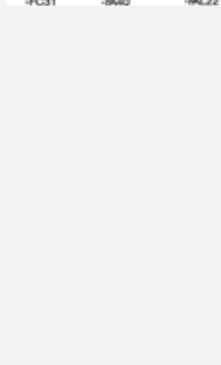

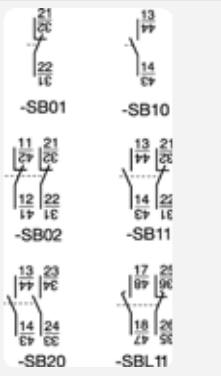


	Description			Connection Diagrams	For Use With	Standard Auxiliary Contact Cat. No.§	Bifurcated Auxiliary Contact Cat. No.
		N.O.	N.C.				
	Auxiliary Contact Blocks for Front Mounting* <ul style="list-style-type: none">2- and 4-poleQuick and easy mounting without toolsElectronic-compatible contacts down to 17V, 5 mAMechanically linked performance between N.O. and N.C. poles and to the main contactor poles (except for L types)Models with equal function with several terminal numbering choices1L = Late break N.C./early make N.O.Bifurcated version for switching down to 5V, 3 mA also available	0	2		100-C all	100-FA02	100-FAB02
					C30®00...C97®00	100-FB02	100-FBB02
		1	1		100-C all	100-FA11	100-FAB11
					C30®00...C97®00	100-FB11	100-FBB11
					C09®10...C23®10	100-FC11	100-FCB11
		2	0		100-C all	100-FA20	100-FAB20
					C30®00...C97®00	100-FB20	100-FBB20
		1L	1L		100-C all	100-FAL11	—
					C30®00...C97®00	100-FBL11	—
					0	4	
1	3			100-C all	100-FA13	100-FAB13	
2	2			100-C all	100-FA22	100-FAB22	
				C30®00...C97®00	100-FB22	100-FBB22	
				C09®10...C23®10	100-FC22	100-FCB22	
3	1			100-C all	100-FA31	100-FAB31	
				C09®10...C23®10	100-FC31	100-FCB31	
4	0			100-C all	100-FA40	100-FAB40	
1+1L	1+1L			100-C all	100-FAL22	—	
	Auxiliary Contact Blocks for Side Mounting without Sequence Terminal Designations* <ul style="list-style-type: none">1- and 2-poleTwo-way numbering for right or left mounting on the contactorQuick and easy mounting without toolsElectronic-compatible contacts down to 17V, 10 mAMirror contact performance to the main contactor poles1L = Late break N.C./early make N.O.			0	1		
		1	0	100-C all	100-SA10		—
		0	2	100-C all	100-SA02		—
		1	1	100-C all	100-SA11		—
		2	0	100-C all	100-SA20		—
		1L	1L	100-C all	100-SAL11		—
			Auxiliary Contact Blocks for Side Mounting with Sequence Terminal Designations* <ul style="list-style-type: none">1- and 2-poleTwo-way numbering for right or left mounting on the contactorQuick and easy mounting without toolsElectronic-compatible contacts down to 17V, 10 mAMirror contact performance to the main contactor poles1L = Late break N.C./early make N.O.	0	1		
1	0			100-C†	100-SB10	—	
0	2			100-C†	100-SB02	—	
1	1			100-C†	100-SB11	—	
2	0			100-C†	100-SB20	—	
1L	1L			100-C†	100-SBL11	—	

* Max. number of auxiliary contacts that may be mounted:
 AC and 24V DC electronic coil contactors — max. 4 N.O. contacts on the front of the contactor, 2 N.O. contacts on the side, 4 N.C. front or side, 6 total.
 DC coil contactors — max. 4 N.O. contacts on the front of the contactor or max 2 N.O. contacts on the side, 4 N.C. front or side, 4 total.

† Double numbering — Left-side mounting only is recommended for Cat. No. 100-C09...100-C23 due to double numbering.

§ For screwless terminals (front mount only), insert "CR" after the "100-" in the catalog number. Example: Cat. No. 100-FA02 becomes Cat. No. 100-CRFA02.

Control Modules (For 100-C09...C97 contactors)