	Description	N.O.	N.C.	Connection Diagrams	For Use With	Standard Auxiliary Contact Cat. No.§	Bifurcated Auxiliary Contact Cat. No.
	Auxiliary Contact Blocks for Front Mounting* • 2- and 4-pole • Quick and easy mounting without tools • Electronic-compatible contacts down to 17V, 5 mA • Mechanically linked performance between N.O. and N.C. poles and to the main contactor poles (except for L types) • Models with equal function with several terminal numbering choices • 1L = Late break N.C./early make N.O. • Bifurcated version for switching down to 5V, 3 mA also available	0	2	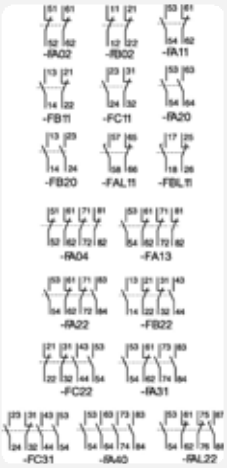	100-C all	100-FA02	100-FAB02
					C30⊗00... C97⊗00	100-FB02	100-FBB02
		1	1		100-C all	100-FA11	100-FAB11
					C30⊗00... C97⊗00	100-FB11	100-FBB11
					C09⊗10... C23⊗10	100-FC11	100-FCB11
		2	0		100-C all	100-FA20	100-FAB20
					C30⊗00... C97⊗00	100-FB20	100-FBB20
		1L	1L		100-C all	100-FAL11	—
					C30⊗00... C97⊗00	100-FBL11	—
		0	4		100-C all	100-FA04	100-FAB04
		1	3		100-C all	100-FA13	100-FAB13
		2	2		100-C all	100-FA22	100-FAB22
					C30⊗00... C97⊗00	100-FB22	100-FBB22
					C09⊗10... C23⊗10	100-FC22	100-FCB22
		3	1		100-C all	100-FA31	100-FAB31
					C09⊗10... C23⊗10	100-FC31	100-FCB31
		4	0		100-C all	100-FA40	100-FAB40
		1+1L	1+1L		100-C all	100-FAL22	—
	Auxiliary Contact Blocks for Side Mounting without Sequence Terminal Designations* • 1- and 2-pole • Two-way numbering for right or left mounting on the contactor • Quick and easy mounting without tools • Electronic-compatible contacts down to 17V, 10 mA • Mirror contact performance to the main contactor poles • 1L = Late break N.C./early make N.O.	0	1	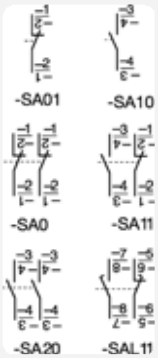	100-C all	100-SA01	—
		1	0		100-C all	100-SA10	—
		0	2		100-C all	100-SA02	—
		1	1		100-C all	100-SA11	—
		2	0		100-C all	100-SA20	—
		1L	1L		100-C all	100-SAL11	—
	Auxiliary Contact Blocks for Side Mounting with Sequence Terminal Designations* • 1- and 2-pole • Two-way numbering for right or left mounting on the contactor • Quick and easy mounting without tools • Electronic-compatible contacts down to 17V, 10 mA • Mirror contact performance to the main contactor poles • 1L = Late break N.C./early make N.O.	0	1	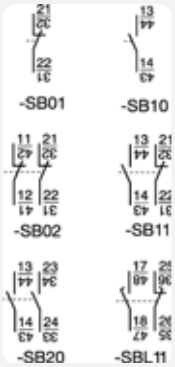	100-C	100-SB01	—
		1	0		100-C‡	100-SB10	—
		0	2		100-C‡	100-SB02	—
		1	1		100-C‡	100-SB11	—
		2	0		100-C‡	100-SB20	—
		1L	1L		100-C‡	100-SBL11	—

* Max. number of auxiliary contacts that may be mounted:
AC and 24V DC electronic coil contactors — max. 4 N.O. contacts on the front of the contactor, 2 N.O. contacts on the side, 4 N.C. front or side, 6 total.
DC coil contactors — max. 4 N.O. contacts on the front of the contactor or max 2 N.O. contacts on the side, 4 N.C. front or side, 4 total.

‡ Double numbering — Left-side mounting only is recommended for **Cat. No. 100-C09…100-C23** due to double numbering.

§ For screwless terminals (front mount only), insert "CR" after the "100-" in the catalog number. Example: **Cat. No. 100-FA02** becomes **Cat. No. 100-CRFA02**.

Control Modules (For 100-C09…C97 contactors)