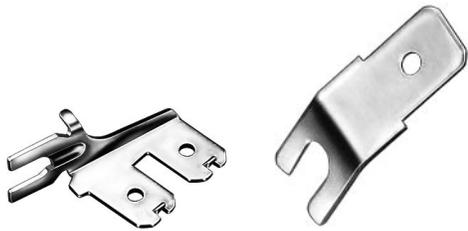

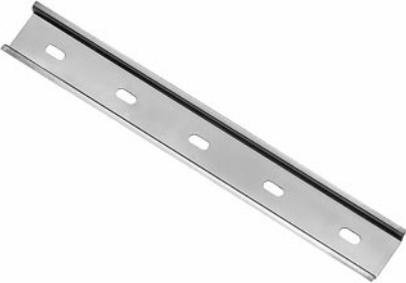


Bulletin 100 Line
Accessories — Field Installed
Accessories, Continued

	Description	Used with Cat. No.	Type	Cat. No.	*
 <p>Cat. No. 199-SC1 Cat. No. 199-SC2</p>	Stab Con- nector Kits	100-A09, A12	Twin Stab for Power Terminals (50 per pack)	199-SC1	
		All Bulletin 100 Contactors	Single Stab for Coil Terminals (20 per pack)	199-SC2	
	Terminal Lug Kit	100-B110	3 Lugs per kit	199-LE1	
		100-B180, 100W-B180_		199-LF1	
		100-B250, -B300, 100W-B300_		199-LG1	
		100-B400		199-LH1	
		100-B600, 100W-B600_		199-LJ1	
	Terminal Cover Kit	100-B110	Provides IP20 Finger Protection (1 Pair Per Kit)	199-TCE1	
		100-B180		199-TCF1	
		100-B250, B300		199-TCG1	
		100-B400		193-TCH1	
		100-B600		193-TCJ1	
	DIN Rail (1 Meter)	100-A09...A45 ❶	35 x 7.5 mm	199-DR1 ❷	
	Power Wiring Kit	100-A09, A12	Provides Interconnecting Power Wires for 3 Ø Squirrel Cage Reversing Motors	199-PWA1	
		100-A18, A24		199-PWB1	
		100-A30		199-PWB2	
		100-A38, A45		199-PWC1	
		100-A60, A75		199-PWD1 ❶	
		100-B110		199-PWE1 ❶	
		100-B180		199-PWF1 ❶	
		100-B250, B300		199-PWG1 ❶	
		100-B400		199-PWH1	
		100-B600		199-PWJ1	


❶ Not for use with Cat. No. 100-A38 and Cat. No. 100-A45 Pure DC Operated Contactors.

❷ Must be ordered in multiples of 10.


Bulletin 100 Line Accessories, Continued

Terminal Lug Kits


Dimensions are shown in millimeters (inches) and shipping weights in kg (lbs).
 Dimensions are not intended for manufacturing purposes.

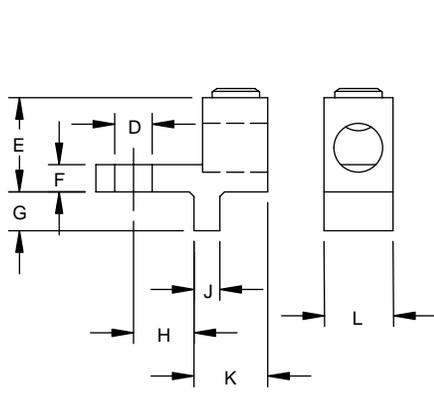

Cat. No. 199-LE1, LF1 & LG1

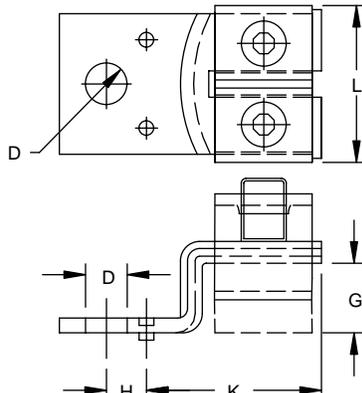


Cat. No. 199-LH1

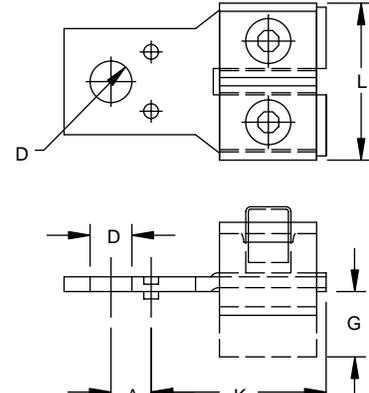

Cat. No. 199-LJ1

Cat. No.	D	E	F	G	H	J	K	L
199-LE1	8.33 (21/64)	19.1 (3/4)	4.06 (5/32)	7.11 (9/32)	9.91 (25/64)	4.06 (5/32)	16.8 (21/32)	16 (5/8)
199-LF1	10.3 (13/32)	25.4 (1)	4.75 (3/16)	9.53 (3/8)	13.8 (35/64)	4.75 (3/16)	21.3 (27/32)	22.2 (7/8)
199-LG1	13.1 (33/64)	36.8 (1-29/64)	5.84 (15/64)	9.53 (3/8)	19.9 (25/32)	5.84 (15/64)	31.8 (1-1/4)	32.3 (1-17/64)
199-LH1	13.1 (33/64)	-	-	19.1 (3/4)	11.2 (7/16)	-	63.5 (2-1/2)	53.3 (2-7/64)
199-LJ1	13.1 (33/64)	-	-	25.4 (1)	17 (43/64)	-	90 (3-9/16)	60.5 (2-3/8)

Terminal Pads for Contactors and Current Transformer Overload Relays

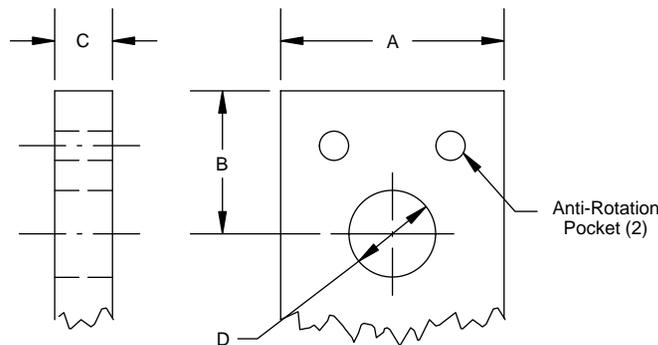

Cat. No.	A	B	C	D
100-B110 & 193-HPD	115 (19/32)	10 (25/64)	3.18 (1/8)	8.41 (21/64)
100-B180 & 193-DPD	20 (25/32)	13.8 (35/64)	4.75 (3/16)	10.4 (13/32)
100-B250 & B300 193-EPD	32 (1-17/64)	18.1 (23/32)	4.75 (3/16)	13 (33/64)
100-B400 & 193-FPD	35 (1-3/8)	19 (3/4)	5 (13/64)	13 (33/64)
100-B600 & 193-GPD	50 (1-31/32)	27 (1-1/16)	5 (13/64)	13 (33/64)