



FLEX 5000 Modules Specifications

Digital I/O Module Catalog Numbers 5094-IB16, 5094-IB16XT, 5094-OB16, 5094-OB16XT, 5094-OW8I, 5094-OW8IXT

Analog I/O Module Catalog Numbers 5094-IF8, 5094-IF8XT, 5094-IY8, 5094-IY8XT, 5094-OF8, 5094-OF8XT

Specialty Module Catalog Numbers 5094-HSC, 5094-HSCXT

EtherNet/IP Adapter Catalog Numbers 5094-AENTR, 5094-AENTRXT, 5094-AEN2TR, 5094-AEN2TRXT

Mounting Base Catalog Numbers 5094-MB, 5094-MBXT

Removable Terminal Block Catalog Numbers 5094-RTB3, 5094-RTB3XT, 5094-RTB3S, 5094-RTB3SXT, 5094-RTB3T, 5094-RTB3TXT, 5094-RTB3TS, 5094-RTB3TSXT, 5094-RTB3W, 5094-RTB3WXT, 5094-RTB3WS, 5094-RTB3WSXT

Accessories Catalog Numbers 5094-STB, 5094-SAJMPR, 5094-N2

Topic	Page
Digital I/O Modules	2
Analog I/O Modules	14
Specialty Modules	35
EtherNet/IP Adapters	45
Terminal Base Assemblies	50
Accessories	56

The FLEX 5000™ I/O architecture provides a wide range of input and output modules to span many applications, from high-speed digital to process control. The architecture uses Producer/Consumer technology that allows input information and output status to be shared among multiple Logix 5000™ controllers.

FLEX 5000 I/O systems are used as remote I/O modules with Logix 5000 controllers such as ControlLogix® 5580, CompactLogix™ 5380 and CompactLogix 5480. The modules are configured with the Studio 5000 Logix Designer® application.

The I/O modules require a terminal base (TB) assembly to connect field-side wiring. These are not included with the I/O modules. TBs consists of a mounting base (MB) and removable terminal block (RTB). MBs and RTBs are available for order individually.

Digital I/O Modules


I/O Type	Cat. No.	Page
DC digital input	5094-IB16, 5094-IB16XT	3
DC digital output	5094-OB16, 5094-OB16XT	6
Relay output	5094-OW8I, 5094-OW8IXT	9

Environmental specifications and certifications for FLEX 5000 digital I/O modules are provided on [page 12](#).

5094-IB16 and 5094-IB16XT Digital 16-point Sinking Input Modules

This figure shows a wiring diagram for the 5094-IB16 and 5094-IB16XT modules. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.


5094-IB16 and 5094-IB16XT Wiring Diagram

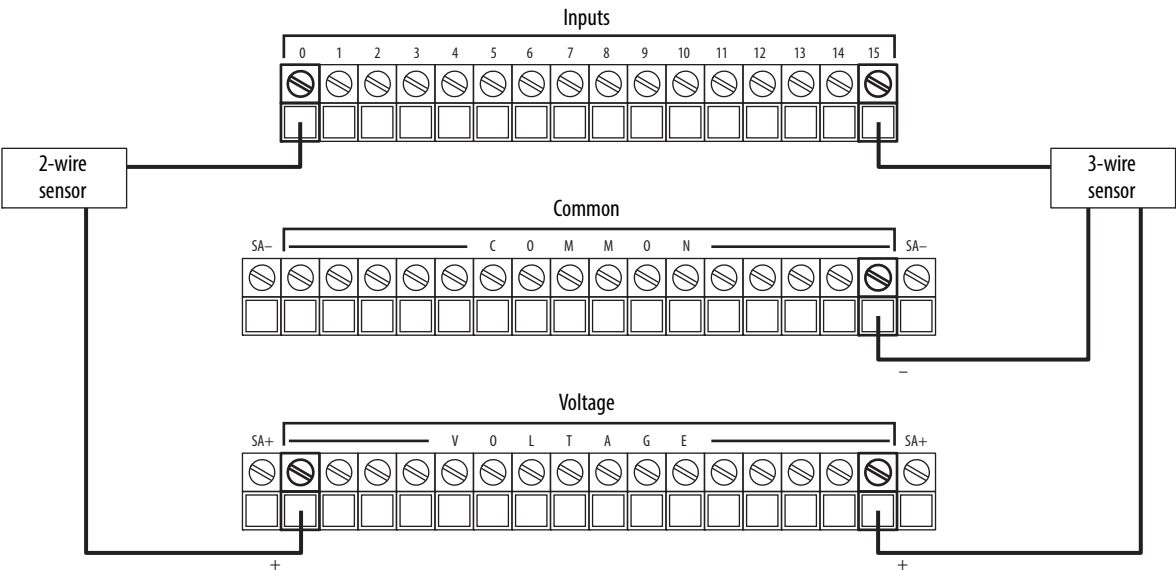

IMPORTANT: The 5094-IB16 and 5094-IB16XT module inputs use a shared common. The inputs have a return through internal module circuitry to the SA (-) terminal on the terminal base.

This figure shows a functional block diagram for the 5094-IB16 and 5094-IB16XT modules.

5094-IB16 and 5094-IB16XT Functional Block Diagram

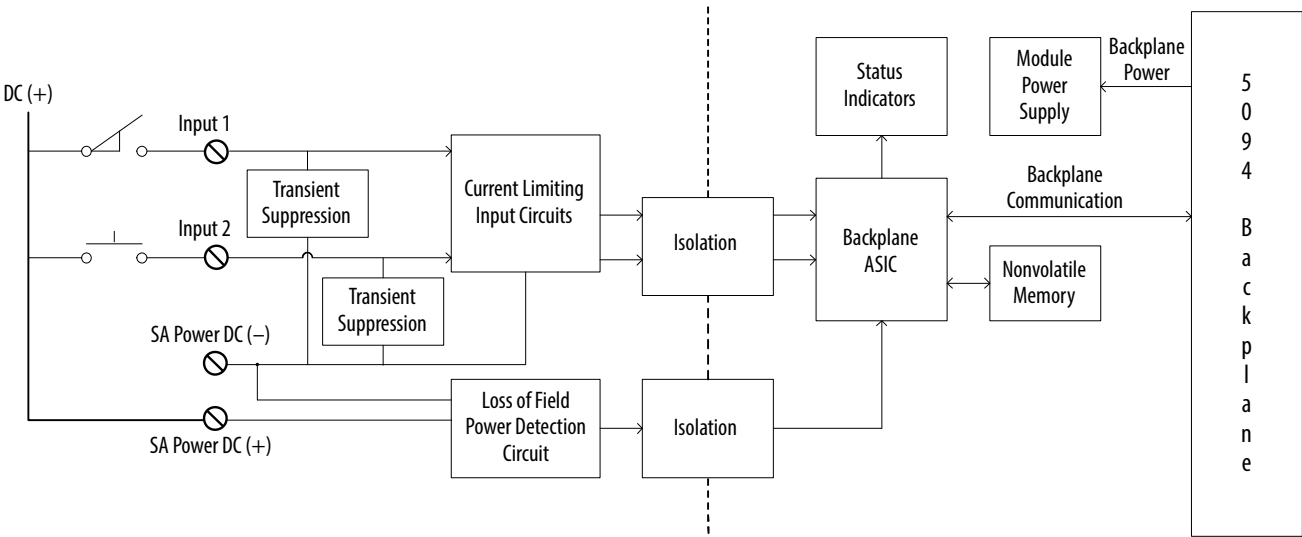

Technical Specifications - 5094-IB16, 5094-IB16XT

Attribute	Value
On-state voltage range	10...32V DC
On-state current, min	2 mA @ 10V DC
On-state current, nom	6 mA @ 24V DC
On-state current, max	8 mA @ 32V DC
Off-state voltage, max	5V DC
Off-state current, max	1.5 mA
Input impedance, min	1.3 kΩ @ 10V DC
Input impedance, nom	4 kΩ @ 24V DC
Input impedance, max	7.4 kΩ @ 32V DC
Module inrush current, max	250 mA peak (decaying to 37% in 22 ms, without activation)
Input delay time (screw to backplane), max Off to On On to Off	100 μs @ 25 °C (77 °F) 100 μs @ 25 °C (77 °F)
Input drift over temperature span	±300 ns/°C -40...70 °C
Input minimum pulse width Off to On On to Off	80 μs 80 μs
Input filter time Off to On On to Off	Hardware delay: 98 μs + filter time User-selectable filter time: 0...50 ms Hardware delay: 98 μs + filter time User-selectable filter time: 0...50 ms
Reverse polarity protection	Yes
Overvoltage protection, max	36V (fuse protected, non-replaceable)
Pulse and period measurements	Not supported
Simple counters Counter frequency	0 - $f_{max} = 500$ Hz (inv period 2 ms) Channel 0...7 only
Timestamp of inputs	Yes
CIP sync	Transport clock, and slave only ordinary clock
Overrides	Not supported
Pulse latching	Supported
Events	Four events supported (triggered by any input or simple counters)
Pattern matching	Supported
Extended counters	Not supported

General Specifications - 5094-IB16, 5094-IB16XT

Attribute	Value
Inputs	16 Channels (1 group of 16), sinking
Voltage category	12/24V DC Sink
Input voltage range	10...32V DC
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	80 mA
Sensor Actuator Power (SA) voltage range	18...32V DC
Sensor Actuator Power (SA) current, max	8 mA per channel 135 mA per module (128 mA + 7 mA for SA power detection)
Power dissipation, max ⁽¹⁾	3.5 W
Thermal dissipation, max ⁽¹⁾	11.9 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type, System to Field No isolation between SA Power and input ports No isolation between individual input ports
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 16 yellow/red I/O status indicators
Terminal base (TB) assembly	5094-TB3 (consists of a 5094-MB and 5094-RTB3) or 5094-TB3S (consists of a 5094-MB and 5094-RTB3S) or 5094-TB3XT (consists of a 5094-MBXT and 5094-RTB3XT) or 5094-TB3SXT (consists of a 5094-MBXT and 5094-RTB3SXT) or IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	1  1
Wire category ⁽²⁾	2 - signal ports 2 - power ports
Wire size - Signal	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	101 g (0.22 lb)
Enclosure type	None (open-style)
North American temp code	T4
ATEX/IECEx temp code	T4
IECEx temp code	T4


(1) Value is measured at 70 °C (158 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

5094-OB16 and 5094-OB16XT Digital 16-point Sourcing Output Modules


This figure shows a wiring diagram for the 5094-OB16 and 5094-OB16XT modules. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-OB16 and 5094-OB16XT Wiring Diagram

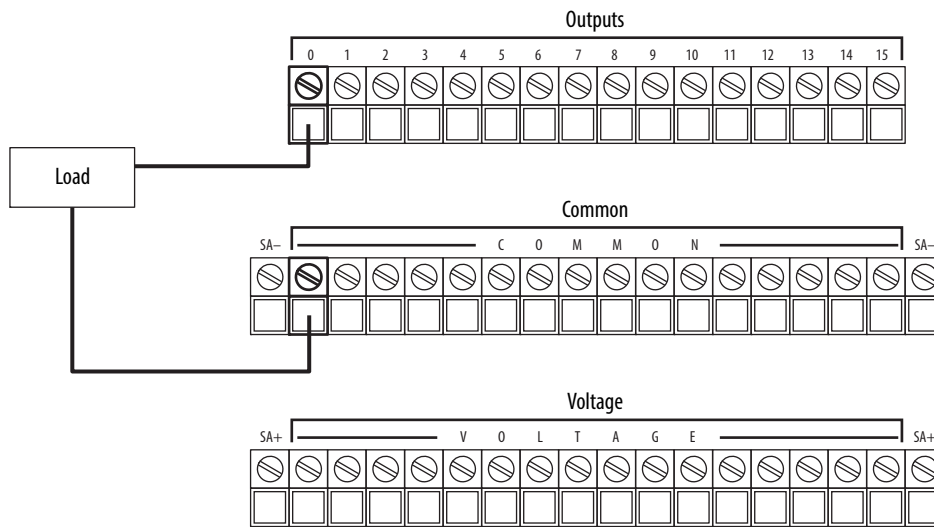

This figure shows a functional block diagram for the 5094-OB16 and 5094-OB16XT modules.

5094-OB16 and 5094-OB16XT Functional Block Diagram

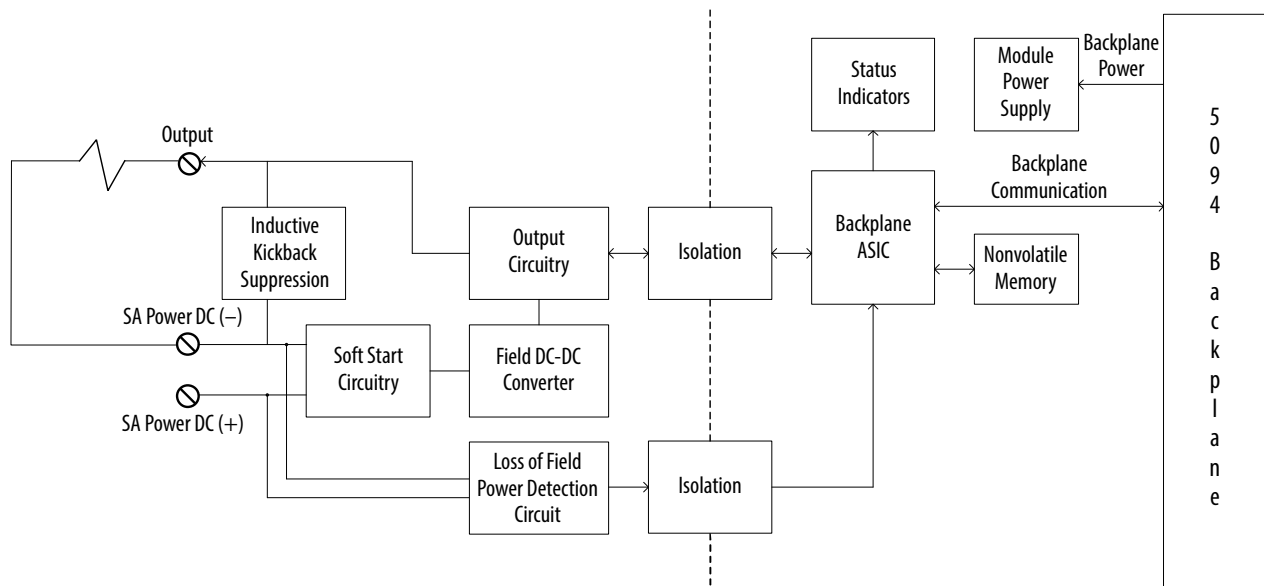

Technical Specifications - 5094-OB16, 5094-OB16XT

Attribute	Value
On-state voltage range	18...32V DC
On-state voltage drop, max	0.25V DC
On-state current per channel, min	1 mA
Off-state voltage, max	5V DC with 1 mA min load
Off-state leakage current per point, max ⁽¹⁾	0.5 mA per point
Output current rating, max	0.5 A per channel
Surge current per point	1 A max for 10 ms per point, repeatable every 2 s
Output delay time (backplane to screw), max Off to On On to Off	100 μ s @ 25 °C (77 °F) @ 0.5 A 100 μ s @ 25 °C (77 °F) @ 0.5 A
Pulse width, min	$\leq 200 \mu$ s ($T_{on} + T_{off}$) @ 0.5 A @ 25 °C (77 °F)
Output drift	± 400 ns/°C -40...70 °C @ 0.5 A
Open load detection diagnostics ⁽²⁾	Yes
Output short circuit/overload/overtemp detection ⁽³⁾	Yes
Output short circuit/overload protection	Yes
Reverse voltage protection	Yes
Overvoltage protection, max	36V (fuse protected, non-replaceable)
Pilot duty rating	0.5 A resistive and general pilot duty
Output control in fault state per point	• Hold Last State • On • Off (default)
Output states in program mode per point	• Hold Last State • On • Off (default)
Output states in fault mode per point	• Hold Last State • On • Off (default)
Duration of fault mode per point	• 1 s • 2 s • 5 s • 10 s • Forever (default)
Scheduled outputs	Supported
CIP sync	Supported

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 K Ω , 0.5 W resistor for transistor operation.

(2) Diagnostic for the channel is active when the output is in the Off state.

(3) Diagnostic for the channel is active when the output is in the On state.

General Specifications - 5094-OB16, 5094-OB16XT


Attribute	Value
Outputs	16 Channels (1 group of 16), sourcing
Voltage category	24V DC source
Output voltage range	18...32V DC
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	100 mA
Sensor Actuator Power (SA) voltage range	18...32V DC
Sensor Actuator Power (SA) current, max	8.1 A per module
Power dissipation, max	3.8 W (16 channels @ 0.5 A)
Thermal dissipation, max	12.97 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type, System to Field No isolation between SA Power and Output ports No isolation between individual Output ports
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 16 yellow/red I/O status indicators
Terminal base (TB) assembly	5094-TB3 (consists of a 5094-MB and 5094-RTB3) or 5094-TB3S (consists of a 5094-MB and 5094-RTB3S) or 5094-TB3XT (consists of a 5094-MBXT and 5094-RTB3XT) or 5094-TB3SXT (consists of a 5094-MBXT and 5094-RTB3SXT) or IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	1  2
Wire category ⁽¹⁾	2 - signal ports 2 - power ports
Wire size - Signal	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	105 g (0.23 lb)
Enclosure type	None (open - style)
North American temp code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

5094-OW8I and 5094-OW8IXT Digital 8-point Isolated Relay Output Modules


This figure shows a wiring diagram for the 5094-OW8I and 5094-OW8IXT modules. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-OW8I and 5094-OW8IXT Wiring Diagram

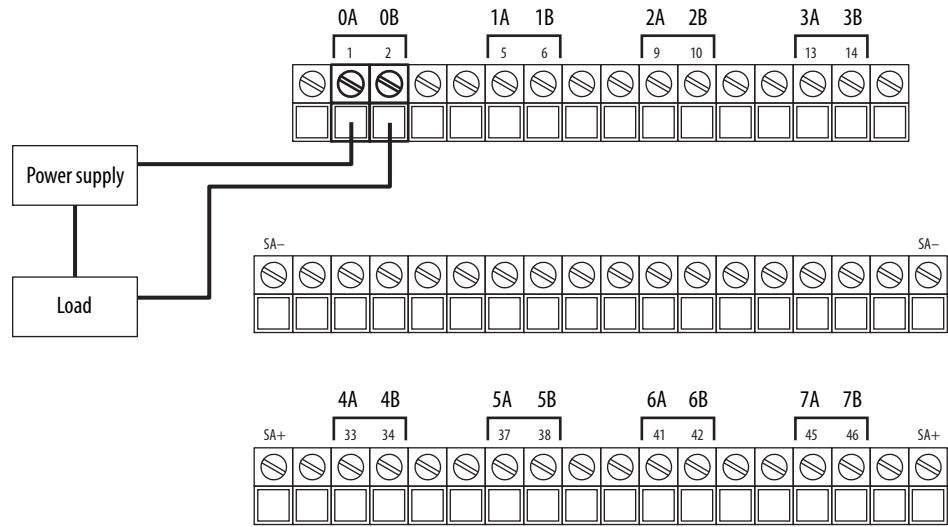

This figure shows a functional block diagram for the 5094-OW8I and 5094-OW8IXT modules.

5094-OW8I and 5094-OW8IXT Functional Block Diagram

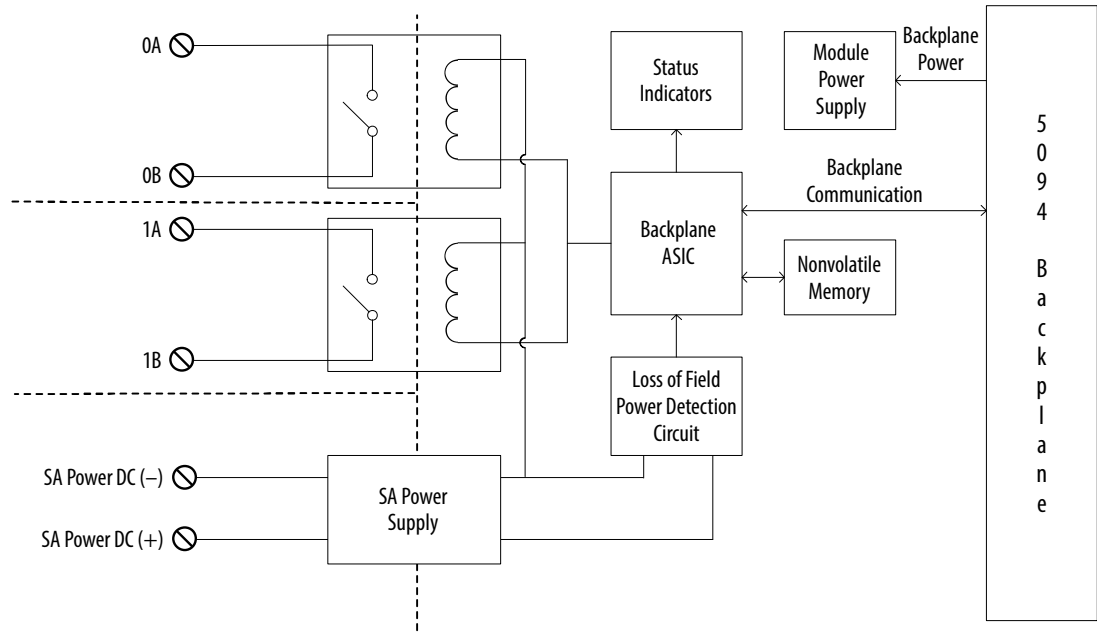

Technical Specifications - 5094-0W8I, 5094-0W8IXT

Attribute	Value
Relay rating ⁽¹⁾	2 A resistive/channel @ 5...30V DC 2 A resistive/channel @ 5...240V AC, 50/60 Hz 2 A general/channel @ 5...240V AC, 50/60 Hz 2 A ATEX/IECEx @ 5...240V AC, 50/60 Hz
Off-state leakage	0 mA (dry contact, no onboard snubbers)
Output current rating, max	2 A per channel
Output delay time, max Off to On On to Off	10 ms 10 ms
Initial contact resistance, max	30 mΩ
Bounce time, mean	500 μs
Output control in fault state per point	• Hold last state • On • Off (default)
Output states in program mode per point	• Hold last state • On • Off (default)
Output states in fault mode per point	• Hold Last State • On • Off (default)
Duration of fault mode per point	• 1 s • 2 s • 5 s • 10 s • Forever (default)
Delay to fault	Supported
Fusing	Outputs are not fused.
Minimum load current	1 mA
Expected contact life	300K cycles resistive, 100K cycles inductive
Pilot duty rating	5...240V AC, 50/60 Hz, C300 pilot duty per channel 5...125V DC, R150 pilot duty per channel

(1) **Surge Suppression** - Connecting surge suppressors across your external inductive load extends the life of the module. For additional details, see the Industrial Automation Wiring and Grounding Guidelines, Allen-Bradley publication [1770-4.1](#).

General Specifications - 5094-0W8I, 5094-0W8IXT

Attribute	Value
Outputs	8 - Form A (normally open)
Output voltage range	5...125V DC 5...240V AC
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	70 mA
Sensor Actuator Power (SA) voltage range	18...32V DC
Sensor Actuator Power (SA) current, max	10 A
Power dissipation, max	3.5 W
Thermal dissipation, max	11.94 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type, System to Field 250V (continuous), Reinforced Insulation Type, System to Channel 250V (continuous), Reinforced Insulation Type, Field to Channel 250V (continuous), Reinforced Insulation Type, Channel to Channel
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 8 yellow/red I/O status indicators
Terminal base (TB) assembly	5094-TB3W (consists of a 5094-MB and 5094-RTB3W) or 5094-TB3WS (consists of a 5094-MB and 5094-RTB3WS) or 5094-TB3WXT (consists of a 5094-MBXT and 5094-RTB3WXT) or 5094-TB3WSXT (consists of a 5094-MBXT and 5094-RTB3WSXT) IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	2  2
Wire category ⁽¹⁾	1 - signal ports 2 - power ports
Wire size - Signal	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	142 g (0.31 lb)
Enclosure type	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

Environmental Specifications and Certifications

The tables below provide the environmental specifications and certifications for the FLEX 5000 digital I/O modules.

Environmental Specifications - FLEX 5000 Digital I/O Modules

Attribute	Value
Temperature, operating IEC 60068-2-1 (Test Ab, Operating Cold), IEC 60068-2-2 (TestBb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	-40 °C < Ta < +70 °C (-40 °F < Ta < +158 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, storage IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Emissions	IEC 61000-6-4
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±4 kV @ 5 kHz on power ports ±4 kV @ 5 kHz on signal ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz
Corrosive resistance classification	ISA S71.04 G2 – Non-XT catalogs ISA S71.04 G3 – XT catalogs

Certifications - FLEX 5000 Digital I/O Modules

Certification⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.
CE	European Union 2014/30/EU EMC Directive, compliant with: • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: • EN 61010-2-201; Control Equipment Safety Requirements European Union 2011/65/EU RoHS, compliant with: • EN 50581; Technical documentation
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions
Ex	European Union 2014/34/EU ATEX Directive, compliant with: • EN 60079-0; General Requirements • EN 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA nC IIC T4 Gc – 5094-0W8I only • II 3 G Ex nA IIC T4 Gc • DEMKO 17 ATEX 1907X
IECEx	IECEx System, compliant with: • IEC 60079-0; General Requirements • IEC 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA nC IIC T4 Gc • IECEx UL 17.0066X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3

(1) When marked. See the Product Certification link at <http://www.ab.com> for Declarations of Conformity, Certificates, and other certification details.

Analog I/O Modules


I/O Type	Cat. No.	Page
Analog input	5094-IF8, 5094-IF8XT	15
	5094-IY8, 5094-IY8XT	20
Analog output	5094-OF8, 5094-OF8XT	29

Environmental specifications and certifications for FLEX 5000 analog I/O modules are provided on [page 33](#).

5094-IF8 and 5094-IF8XT Analog 8-channel Current/Voltage Input Modules


This figure shows a wiring diagram for the 5094-IF8 and 5094-IF8XT modules when used in current mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-IF8 and 5094-IF8XT Wiring Diagram – 2-wire Current Mode

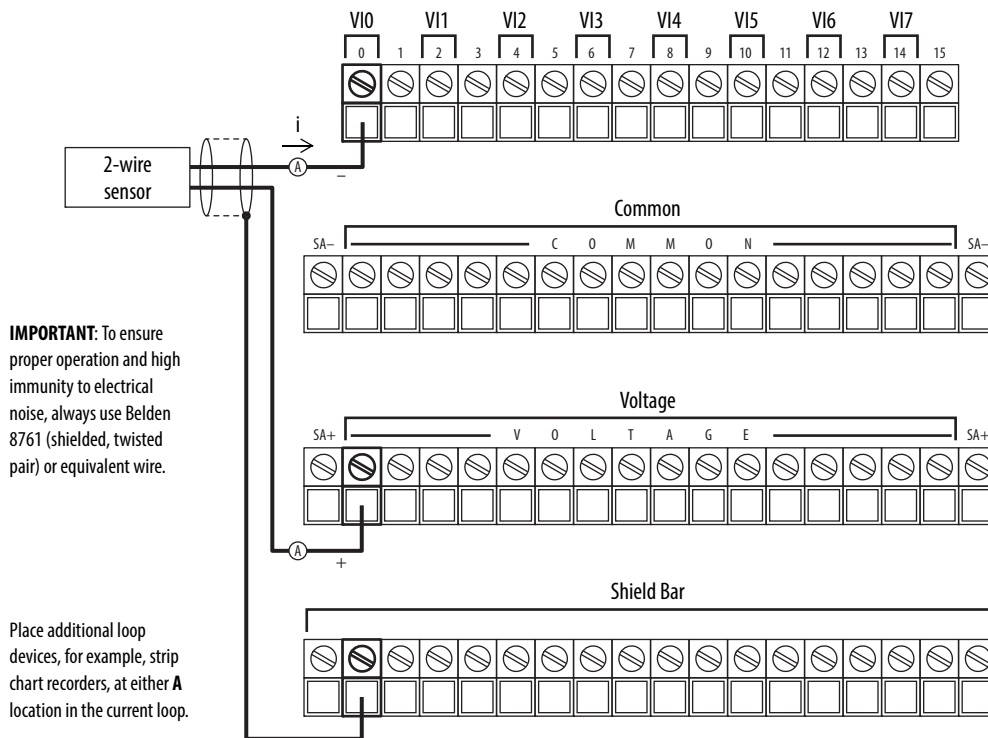


IMPORTANT: The 5094-STB shield bar accessory is required in order to wire the shields for all analog I/O modules and HSC modules using the 5094-TB3 or 5094-TB3T terminal base assemblies. The 5094-STB shield bar accessory is available separately.

5094-IF8 and 5094-IF8XT Wiring Diagram – 3-wire and 4-wire Current Mode

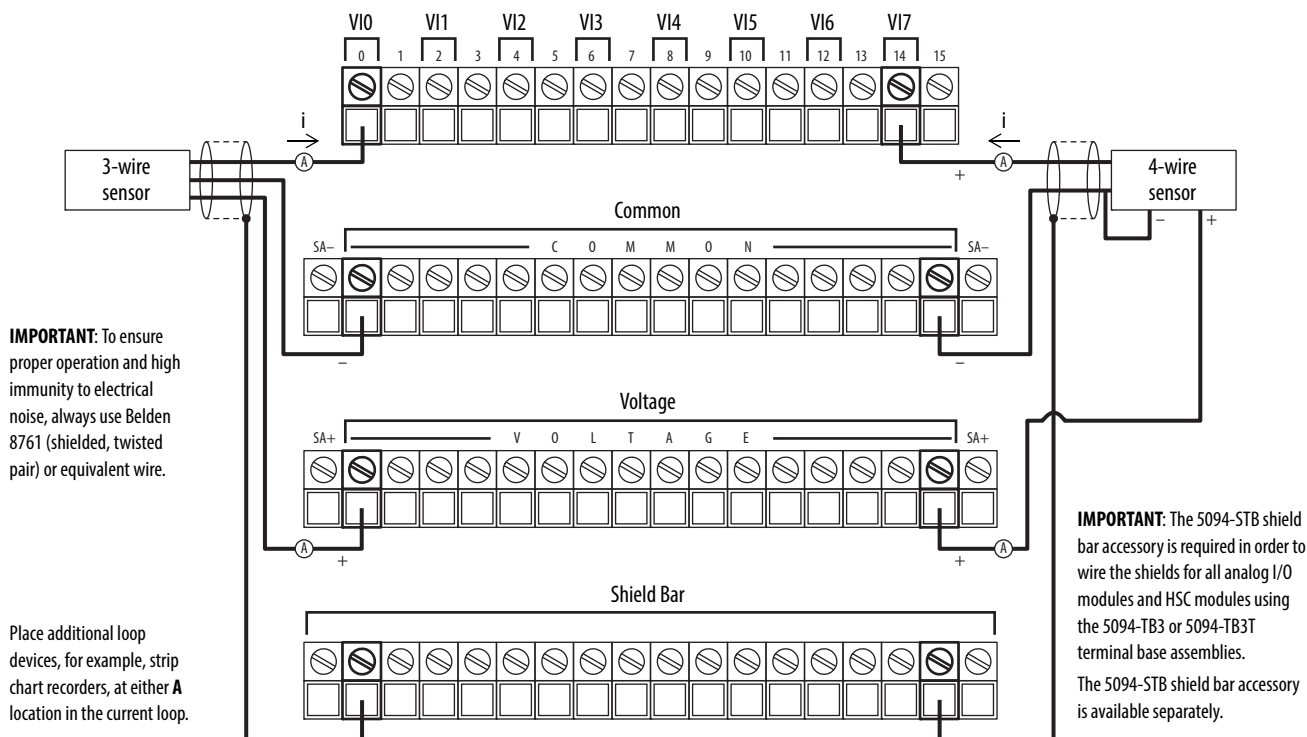


This figure shows a wiring diagram for the 5094-IF8 and 5094-IF8XT modules when used in voltage mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-IF8 and 5094-IF8XT Wiring Diagram – 2-wire Voltage Mode

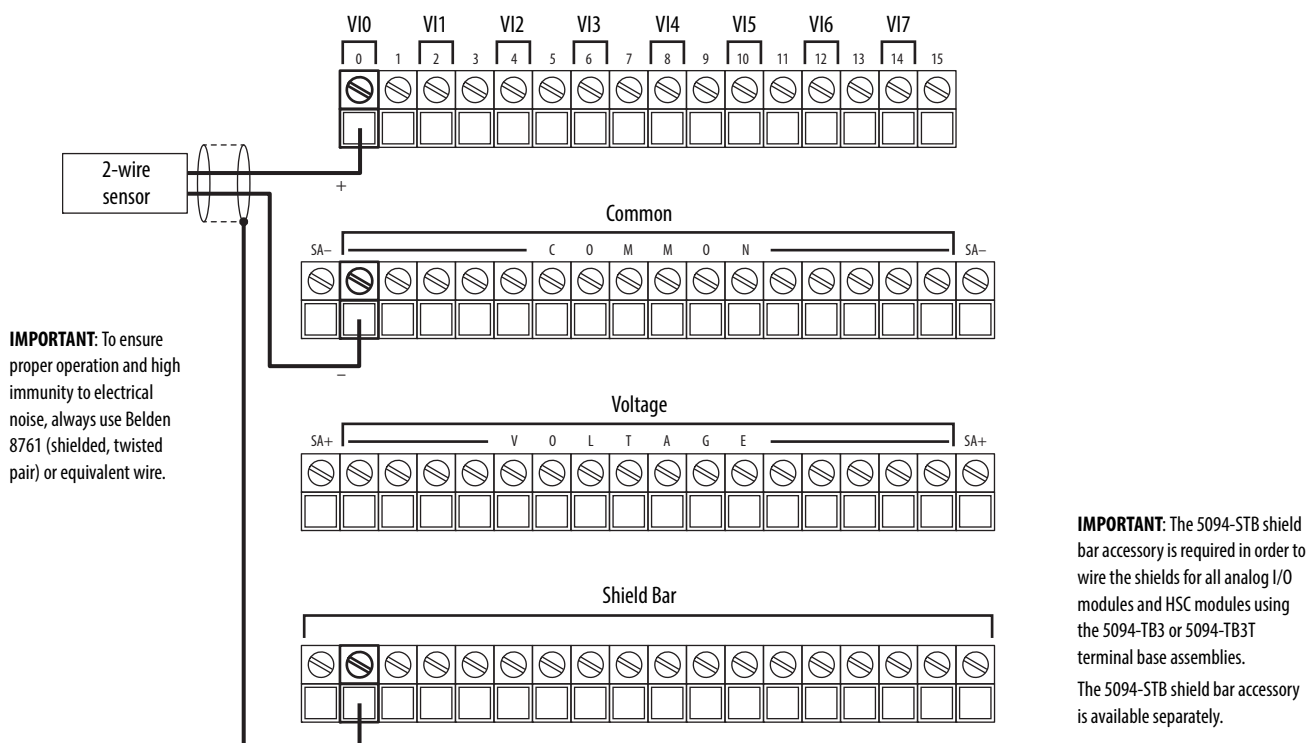


5094-IF8 and 5094-IF8XT Wiring Diagram – 3-wire and 4-wire Voltage Mode

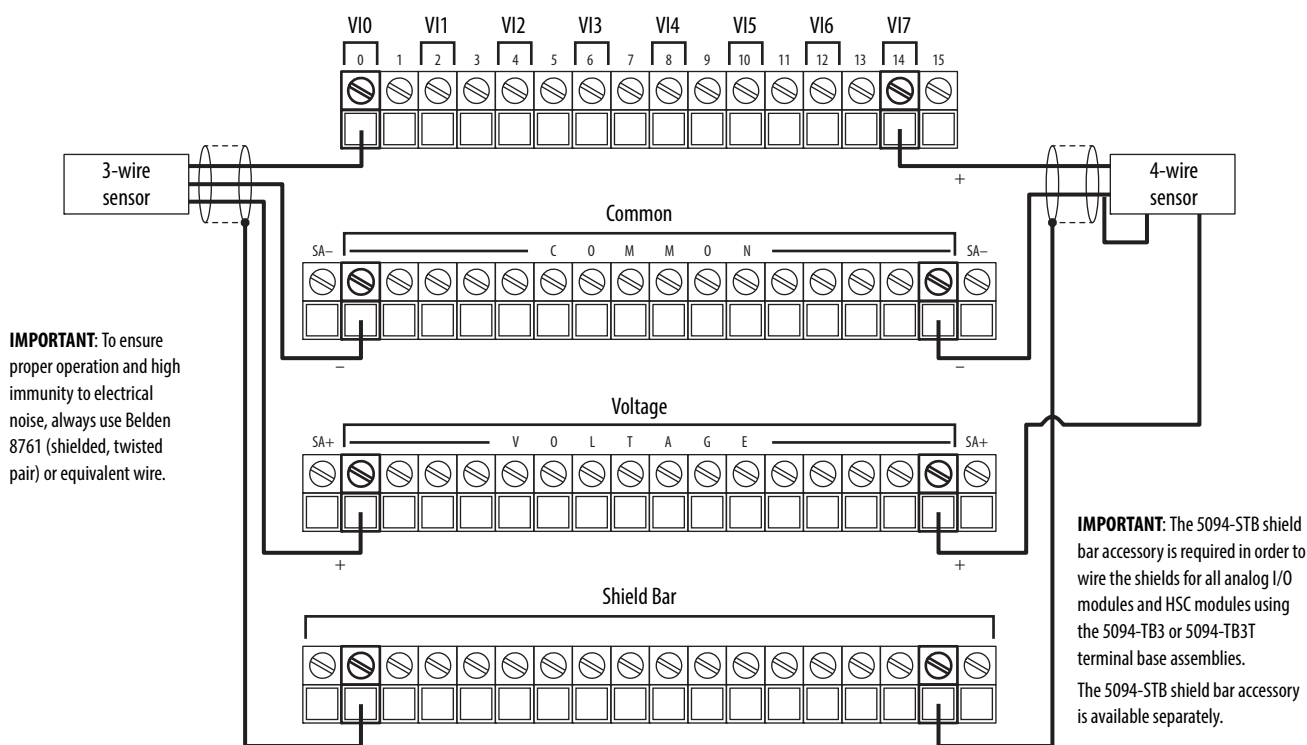

This figure shows a functional block diagram for the 5094-IF8 and 5094-IF8XT modules.

5094-IF8 and 5094-IF8XT Functional Block Diagram

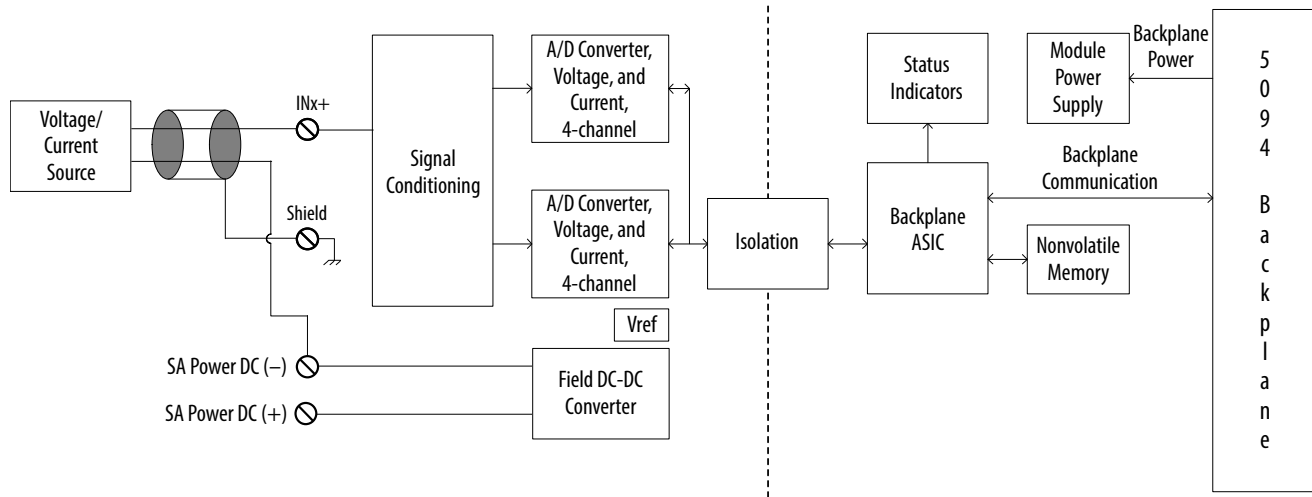

Technical Specifications - 5094-IF8, 5094-IF8XT

Attribute	Value
Inputs	8 single-ended
Input range, voltage	$\pm 10\text{V}$ $0 \dots 10\text{V}$ $0 \dots 5\text{V}$
Input range, current	$0 \dots 20\text{ mA}$ $4 \dots 20\text{ mA}$
Input impedance	Voltage: $>1\text{ M}\Omega$ Current: $250\text{ }\Omega$ typical
Common mode voltage (channel to channel)	$\pm 10\text{V}$
Module conversion method	Sigma-Delta, Two 24-bit multiplexed ADC
Resolution, voltage ⁽¹⁾ (16 bits at 10 Hz notch filter)	$\pm 10.5\text{V}$: $<320\text{ }\mu\text{V/count}$ (15 bits plus sign bipolar) $0 \dots 10.5\text{V}$: $<160\text{ }\mu\text{V/count}$ (16 bits unipolar) $0 \dots 5.25\text{V}$: $<80\text{ }\mu\text{V/count}$ (16 bits unipolar)
Resolution, current ⁽¹⁾ (16 bits at 10 Hz notch filter)	$0 \dots 21\text{ mA}$: $<0.32\text{ }\mu\text{A/count}$ (16 bits) $3.6 \dots 21\text{ mA}$: $<0.32\text{ }\mu\text{A/count}$ (16 bits)
Calibrated accuracy at 25 °C (77 °F)	Voltage: 0.05% full scale Current: 0.05% full scale
Accuracy drift with temperature	Voltage: 28 ppm/°C Current: 47 ppm/°C
Scan Time Per channel Per group (channel group 0...3 or channel group 4...7)	625 μs 2.5 ms
Notch filter at minimum RPI (0.2 ms, 1 channel enabled)	62.5 kHz
Minimum notch filter frequency at RPI of 2.5 ms	10 kHz
Input notch filter (Hz) selections	5, 10 (50/60 Default), 15, 20, 50, 60, 100, 200, 500, 1000, 2500, 5000, 10000, 15625, 25000, 31250, 62500.
Input digital filter	1st order lag, 0 ms (Default) - 32,767 ms (32.767 s)

Technical Specifications - 5094-IF8, 5094-IF8XT

Attribute	Value
HART handheld compliance	Yes
Overvoltage protection, max	Voltage and Current modes: $\pm 32\text{V DC}$
Overcurrent protection	Current mode: $\pm 30\text{ mA}$
Data value during overload condition	Full scale, overrange flag, Data uncertain / data bad
Open circuit detection time	Voltage: + full scale, $< 2\text{ s}$ Current: $4 \dots 20\text{ mA range}$, $< 1\text{ s}$
Onboard data alarming	Yes
Scaling to engineering units	Yes
Real-time channel sampling	Yes
Data format	IEEE 754 32-bit floating point
Timestamp of inputs	Yes
CIP sync	Yes

(1) Notch filter dependent.

General Specifications - 5094-IF8, 5094-IF8XT


Attribute	Value
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	70 mA
Sensor Actuator Power (SA) voltage range	18 . . . 32V DC
Sensor Actuator Power (SA) current, max	120 mA
Power dissipation, max	Current mode: 3.5 W
Thermal dissipation, max	Current mode: 11.94 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type, System to Field No isolation between SA Power and input ports No isolation between individual input ports
Calibration methods	Factory calibrated User-performed (optional)
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 8 yellow/red I/O status indicators
Common mode noise rejection ratio	130 dB @ 50/60 Hz
Normal mode noise rejection ratio	65 dB @ 50/60 Hz, notch filter dependent
Terminal base (TB) assembly	5094-TB3 (consists of a 5094-MB and 5094-RTB3) or 5094-TB3S (consists of a 5094-MB and 5094-RTB3S) or 5094-TB3XT (consists of a 5094-MBXT and 5094-RTB3XT) or 5094-TB3SXT (consists of a 5094-MBXT and 5094-RTB3SXT) or IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	2  1
Wire category ⁽¹⁾	2 - shielded ports 2 - power ports
Wire size - Signal	0.34 . . . 2.5 mm ² (22 . . . 14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	104 g (0.23 lb)
Enclosure type	None (open-style)
North American temperature code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

5094-IY8 and 5094-IY8XT Analog 8-channel Current/Voltage/RTD/Thermocouple Input Modules


This figure shows a wiring diagram for the 5094-IY8 and 5094-IY8XT modules when used in current mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-IY8 and 5094-IY8XT Wiring Diagram – Current Mode

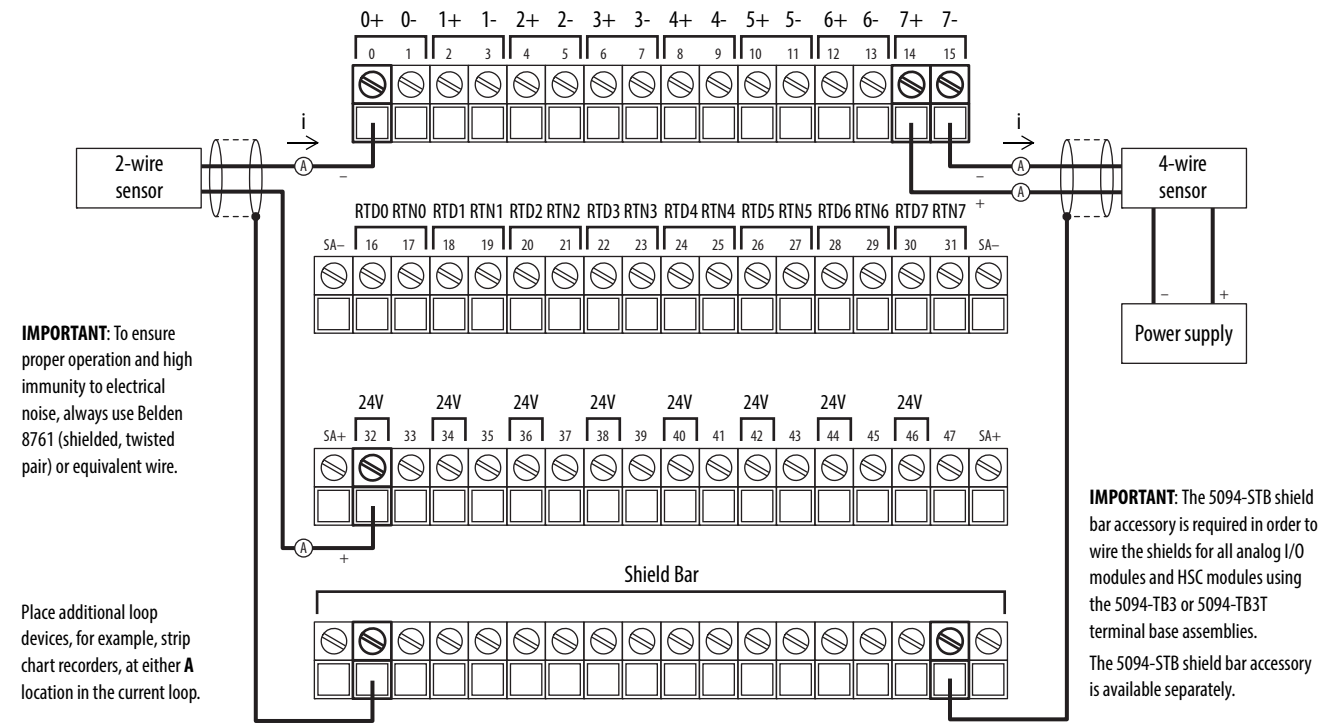


This figure shows a wiring diagram for the 5094-IY8 and 5094-IY8XT modules when used in voltage mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-IY8 and 5094-IY8XT Wiring Diagram – 2-wire Voltage Mode

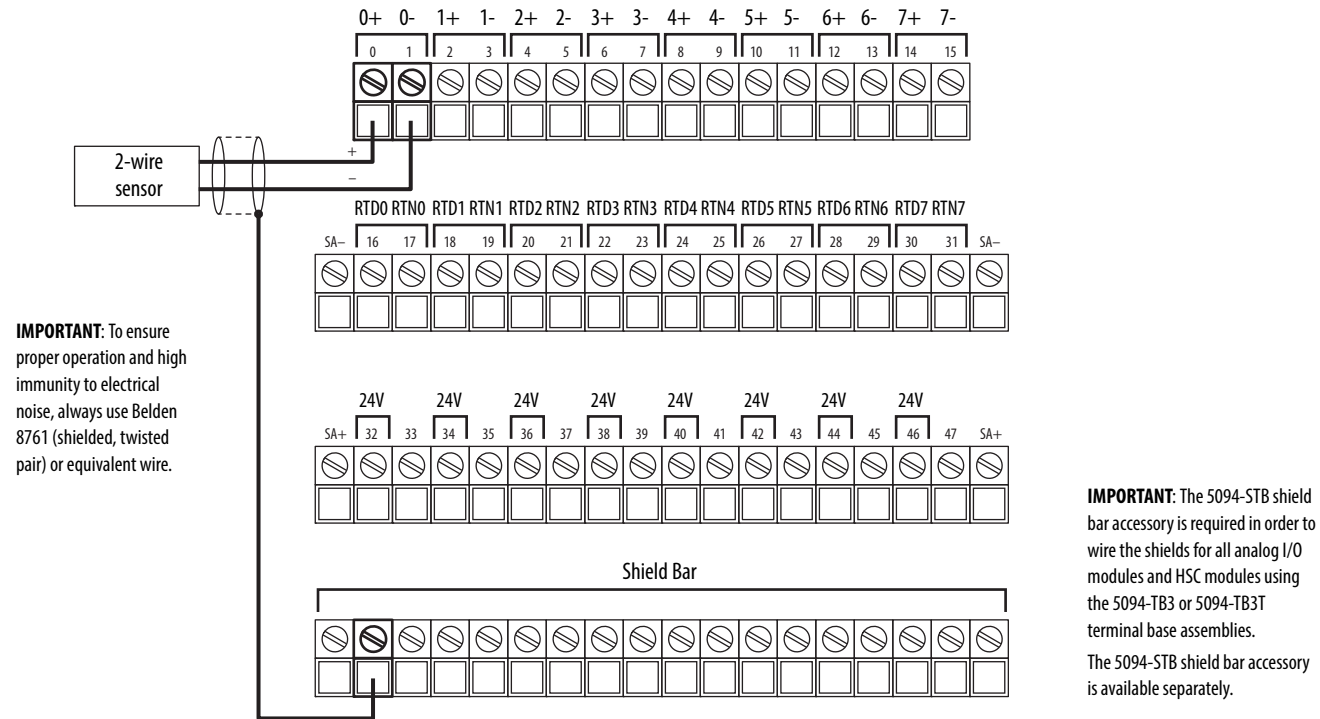


5094-IY8 and 5094-IY8XT Wiring Diagram – 4-wire Voltage Mode

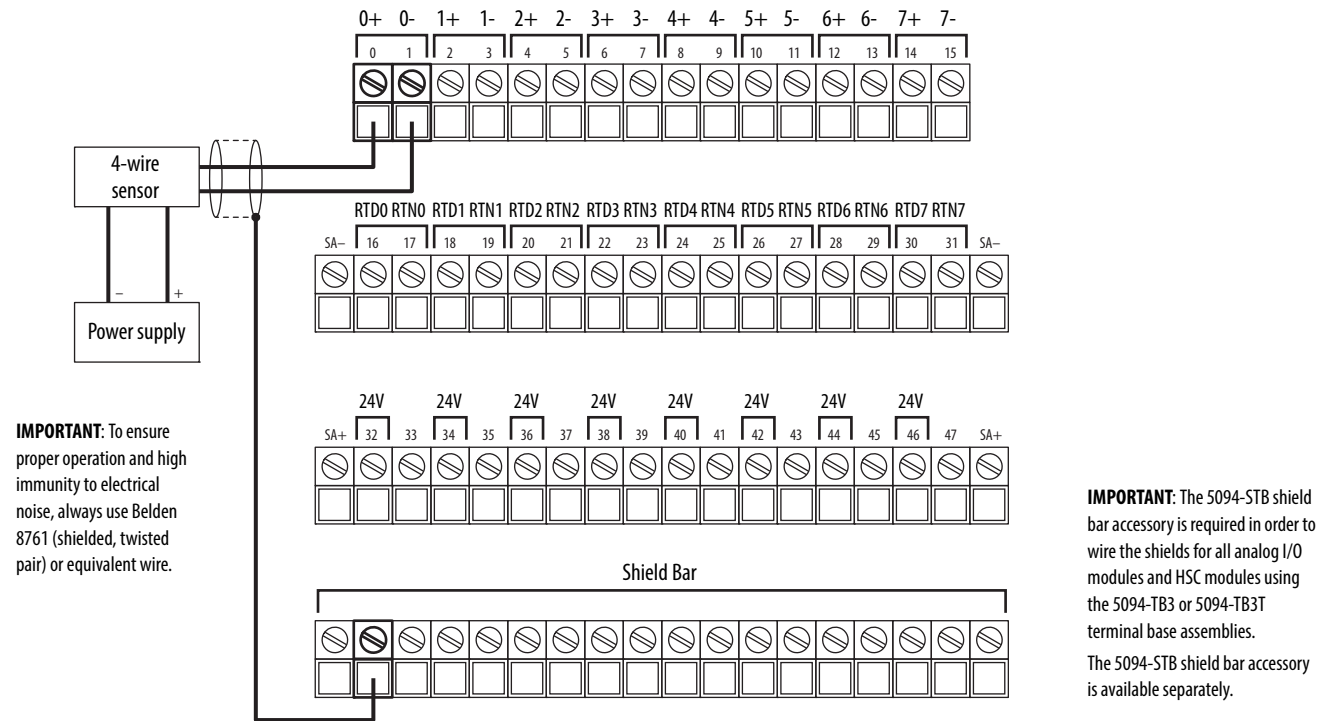


This figure shows a wiring diagram for the 5094-IY8 and 5094-IY8XT modules when used in RTD mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-IY8 and 5094-IY8XT Wiring Diagram – 2-wire RTD Mode

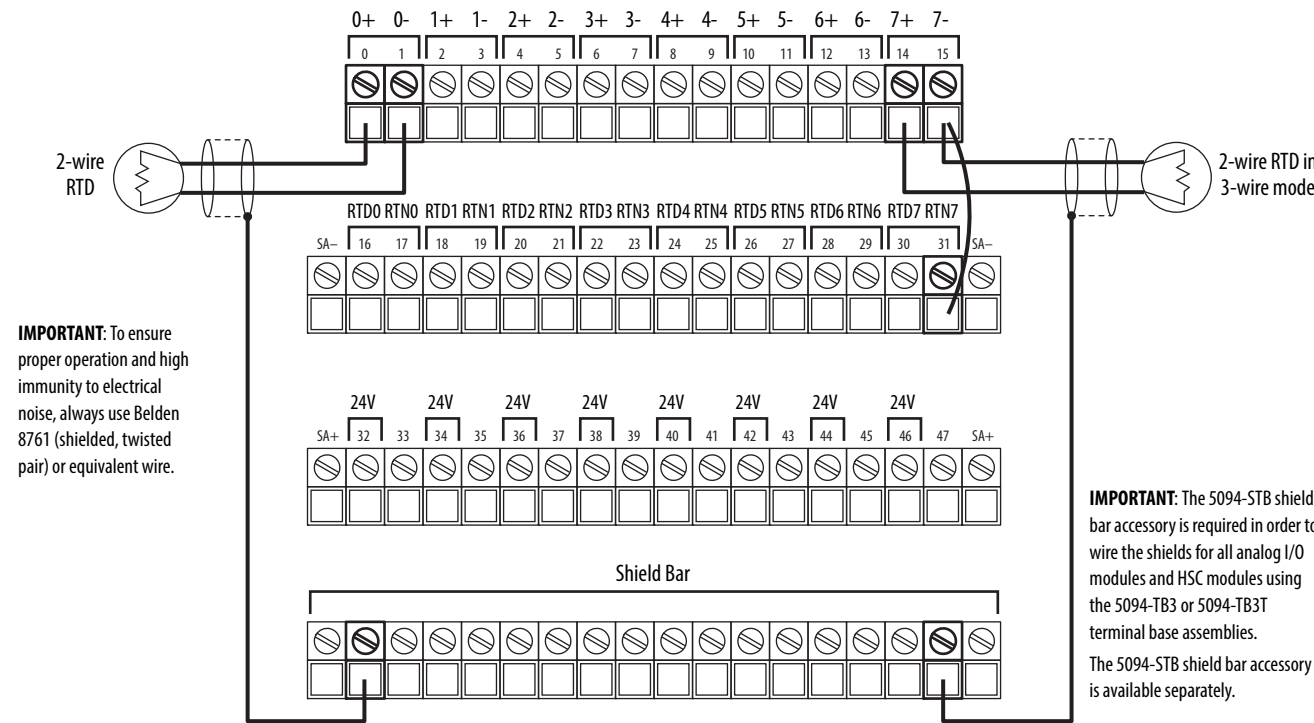


5094-IY8 and 5094-IY8XT Wiring Diagram – 3-wire and 4 wire RTD Mode

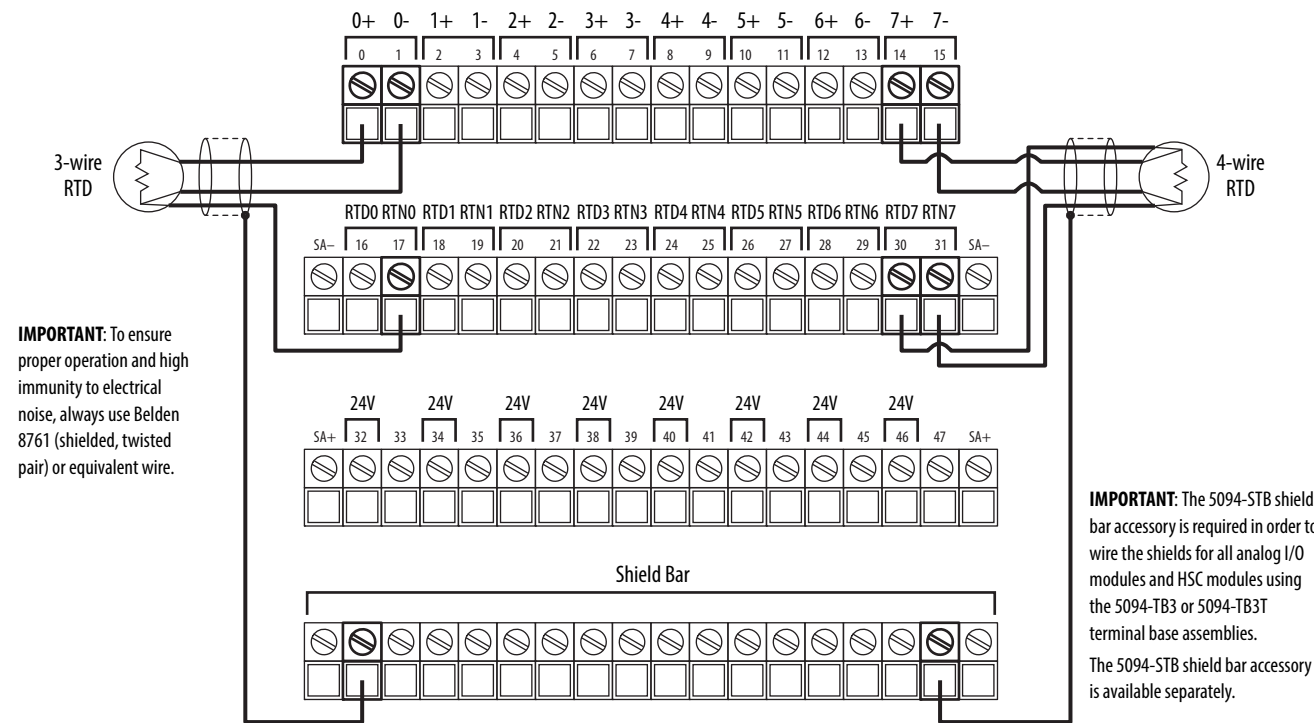


This figure shows a wiring diagram for the 5094-IY8 and 5094-IY8XT modules when used in thermocouple mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-IY8 and 5094-IY8XT Wiring Diagram – Thermocouple Mode

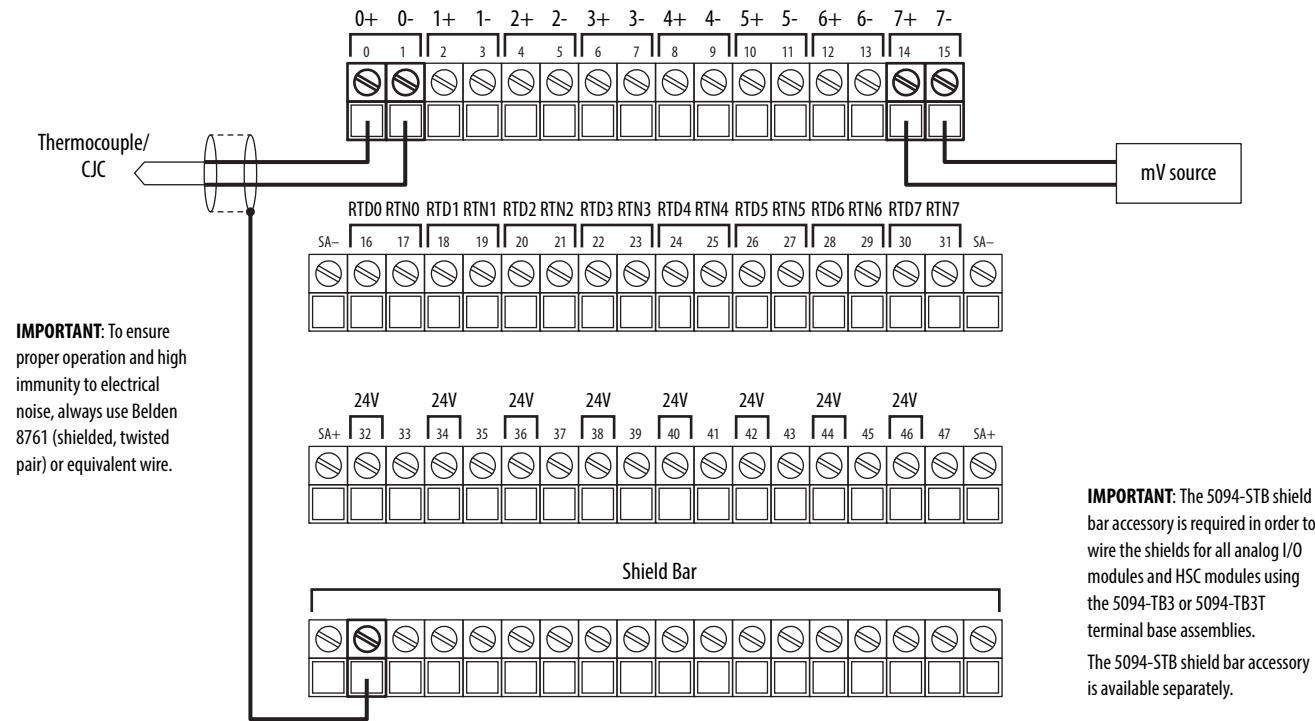

This figure shows a functional block diagram for the 5094-IY8 and 5094-IY8XT modules.

5094-IY8 and 5094- IY8XT Functional Block Diagram

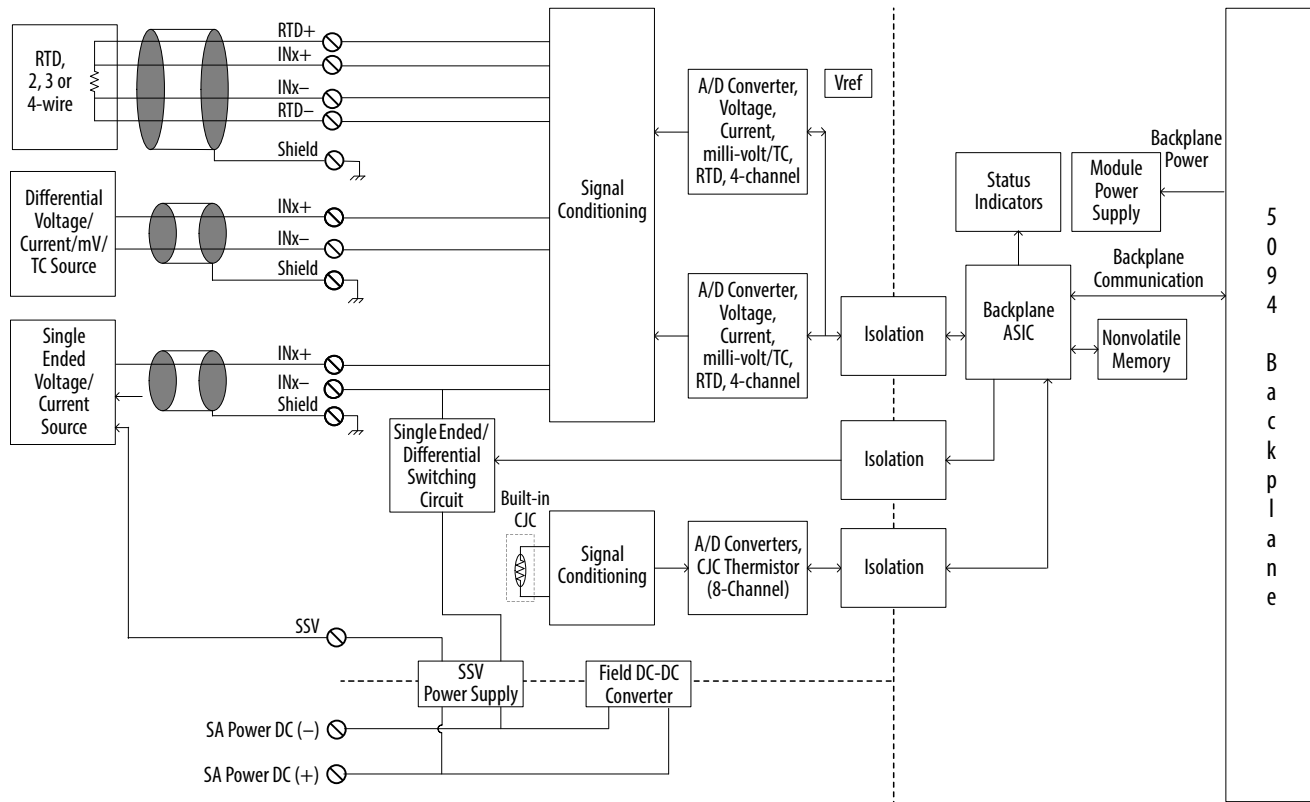

Technical Specifications - 5094-IY8, 5094-IY8XT

Attribute	Value
Inputs	8 differential/single-ended
Differential / Single-ended mode	Yes
Input range, voltage	±10V 0...10V 0...5V
Input range, current	0...20 mA 4...20 mA
Input range, resistive	1...500 Ω 2...1000 Ω 4...2000 Ω 8...4000 Ω
Input type, RTD	100, 200, 500, 1000 Ω platinum, alpha=385 100, 200, 500, 1000 Ω platinum, alpha=3916 120 Ω nickel, alpha=672 100, 120, 200, 500 Ω nickel, alpha=618 10 Ω copper 427
Input range, thermocouple / millivolt	±100 mV
Input type, thermocouple	B, C, D, E, J, K, L (TXK/XK), N, R, S, T
Input impedance	Voltage: >1 MΩ Current: 90 Ω typical, 70...110 Ω range RTD: >1 MΩ Thermocouple/millivolt: >1 MΩ

Technical Specifications - 5094-IY8, 5094-IY8XT

Attribute	Value
Common mode voltage (channel to channel) (for Differential mode only)	$\pm 10V$
Module conversion method	Sigma-Delta, Two 24-bit multiplexed ADC
Resolution, voltage ⁽¹⁾ (16 bits at 10 Hz notch filter)	$\pm 10.5V$: $<320 \mu V/\text{count}$ (15 bits plus sign bipolar) $0 \dots 10.5V$: $<160 \mu V/\text{count}$ (16 bits unipolar) $0 \dots 5V$: $<80 \mu V/\text{count}$ (16 bits unipolar)
Resolution, current ⁽¹⁾ (16 bits at 10 Hz notch filter)	$0 \dots 21 \text{ mA}$: $<0.32 \mu A/\text{count}$ (16 bits) $3.6 \dots 21 \text{ mA}$: $<0.32 \mu A/\text{count}$ (16 bits)
Resolution, resistive ⁽¹⁾ (16 bits at 10 Hz notch filter) 3-wire and 4-wire mode	$<7.7 \text{ m}\Omega/\text{cnt}$ in $1 \dots 500 \Omega$ mode (16 bits) $<15.4 \text{ m}\Omega/\text{cnt}$ in $2 \dots 1000 \Omega$ mode (16 bits) $<30.8 \text{ m}\Omega/\text{cnt}$ in $4 \dots 2000 \Omega$ mode (16 bits) $<61.5 \text{ m}\Omega/\text{cnt}$ in $8 \dots 4000 \Omega$ mode (16 bits)
Resolution, thermocouple / millivolt ⁽¹⁾ (16 bits at 10 Hz notch filter)	$<3.1 \mu V/\text{cnt}$ in $\pm 100 \text{ mV}$ mode
RTD excitation current	600 μA , 3 wire mode & 4 wire mode 100 μA , 2 wire mode
Wire impedance (3-wire RTD mode only)	25 Ω maximum for specified accuracy
RTD sensor types/temperature range: (Each sensor type in a cell supports all temperature ranges in the corresponding column to the right.)	
100, 200, 500, 1000 Ohm PT 385	-200...+870 °C -328...+1598 °F 73...1143 °K 132...2058 °R
100, 200, 500, 1000 Ohm PT 3916	-200...+630 °C -328...+1166 °F 73...903 °K 132...1626 °R
10 Ohm CU 247	-200...+260 °C -328...+500 °F 73...533 °K 132...960 °R
120 Ohm NI 672	-80...+320 °C -112...+608 °F 193...593 °K 348...1068 °R
100, 120, 200, 500 Ohm NI 618	-60...+250 °C -76...+482 °F 213...523 °K 384...942 °R

Technical Specifications - 5094-IV8, 5094-IV8XT

Attribute	Value
Thermocouple type/temperature range:	
Thermocouple Type B	21...1820 °C 68...3308 °F 293...2093 °K 528...3768 °R
Thermocouple Type C	0...2320 °C 32...4208 °F 273...2593 °K 492...4668 °R
Thermocouple Type D	0...2320 °C 32...4208 °F 273...2593 °K 492...4668 °R
Thermocouple Type E	-270...+1000 °C -454...+1832 °F 3...1273 °K 6...2292 °R
Thermocouple Type J	-210...+1200 °C -346...+2192 °F 63...1473 °K 114...2652 °R
Thermocouple Type K	-270...+1372 °C -454...+2502 °F 3...1645 °K 6...2961 °R
Thermocouple Type N	-270...+1300 °C -454...+2372 °F 3...1573 °K 6...2832 °R
Thermocouple Type R	-50...+1768 °C -58...+3215 °F 223...2041 °K 402...3674 °R
Thermocouple Type S	-50...+1768 °C -58...+3215 °F 223...2041 °K 402...3674 °R
Thermocouple Type T	-270...+400 °C -454...+752 °F 3...673 °K 6...1212 °R
Thermocouple Type TXK/XK (L)	-200...+800 °C -328...+1472 °F 73...1073 °K 132...1932 °R
Thermocouple linearization	ITS-90
CJC inputs (for thermocouple mode use only)	CJC sensors 8 thermistors embedded in 5094-RTB3T Measurement Specialties, Inc. 10K3A1A
Local CJC sensor accuracy	±0.5 °C
Remote CJC sensor accuracy	Based on channel accuracy
Sensor source voltage output (SSV)	24V, 200 mA max

Technical Specifications - 5094-IY8, 5094-IY8XT

Attribute	Value
Calibrated accuracy at 25 °C (77 °F)	Voltage: 0.05% full scale Current: 0.05% full scale RTD: 0.05% full scale Thermocouple/millivolt: 0.05% full scale
Accuracy drift with temperature	Voltage: 28 ppm/°C Current: 47 ppm/°C RTD: 60 ppm/°C Thermocouple/millivolt: 15 ppm/°C
Scan time Per channel Per group (channel group 0...3 or channel group 4...7)	625 µs 2.5 ms
Notch filter at minimum RPI (0.2 ms, 1 channel enabled)	62.5 kHz
Minimum notch filter frequency at RPI of 2.5 ms	10 kHz
Input notch filter (Hz) selections	5, 10 (50/60 default), 15, 20, 50, 60, 100, 200, 500, 1000, 2500, 5000, 10000, 15625, 25000, 31250, 62500.
Input digital filter	1st Order Lag, 0 ms (Default) - 32,767 ms (32.767 s)
HART handheld compliance	No Add an external 250 Ω resistor into the current loop for HART transmitter compliance.
Overvoltage protection, max	Voltage, current, RTD, and thermocouple/mV modes: ±32V DC
Overcurrent protection	Current mode: ±30 mA
Data value during overload condition	Full scale, overrange flag, Data uncertain / data bad
Open circuit detection time, nom	Voltage: + full scale, <2 s Current: 4...20 mA range, <1 s RTD: <10 s Thermocouple/millivolt: + full scale, <2 s
Onboard data alarming	Yes
Scaling to engineering units	Yes
Real-time channel sampling	Yes
Data format	IEEE 754 32-bit floating point
Timestamp of inputs	Yes
CIP sync	Yes

(1) Notch filter dependent.

General Specifications - 5094-IY8, 5094-IY8XT


Attribute	Value
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	75 mA
Sensor Actuator Power (SA) voltage range	18...32V DC
Sensor Actuator Power (SA) current, max	480 mA (include SSV 200 mA)
Power dissipation, max	3.9 W
Thermal dissipation, max	13.31 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type, System to Field No isolation between SA Power and input ports No isolation between individual input ports
Calibration methods	Factory calibrated User-performed (optional)
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 8 yellow/red I/O status indicators
Common mode noise rejection ratio	130 dB @ 50/60 Hz
Normal mode noise rejection ratio	65 dB @ 50/60 Hz, notch filter dependent
Terminal base (TB) assembly	5094-TB3T (consists of a 5094-MB and 5094-RTB3T) or 5094-TB3TS (consists of a 5094-MB and 5094-RTB3TS) or 5094-TB3TXT (consists of a 5094-MBXT and 5094-RTB3TXT) or 5094-TB3TSXT (consists of a 5094-MBXT and 5094-RTB3TSXT) IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	3  3
Wire category ⁽¹⁾	2 - shielded ports 2 - power ports
Wire size - Signal	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	119 g (0.26 lb)
Enclosure type	None (open-style)
North American temperature code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

5094-OF8 and 5094-OF8XT Analog Current/Voltage Output Modules


This figure shows a wiring diagram for the 5094-OF8 and 5094-OF8XT modules when used in current mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-OF8 and 5094-OF8XT Wiring Diagram – Current Mode

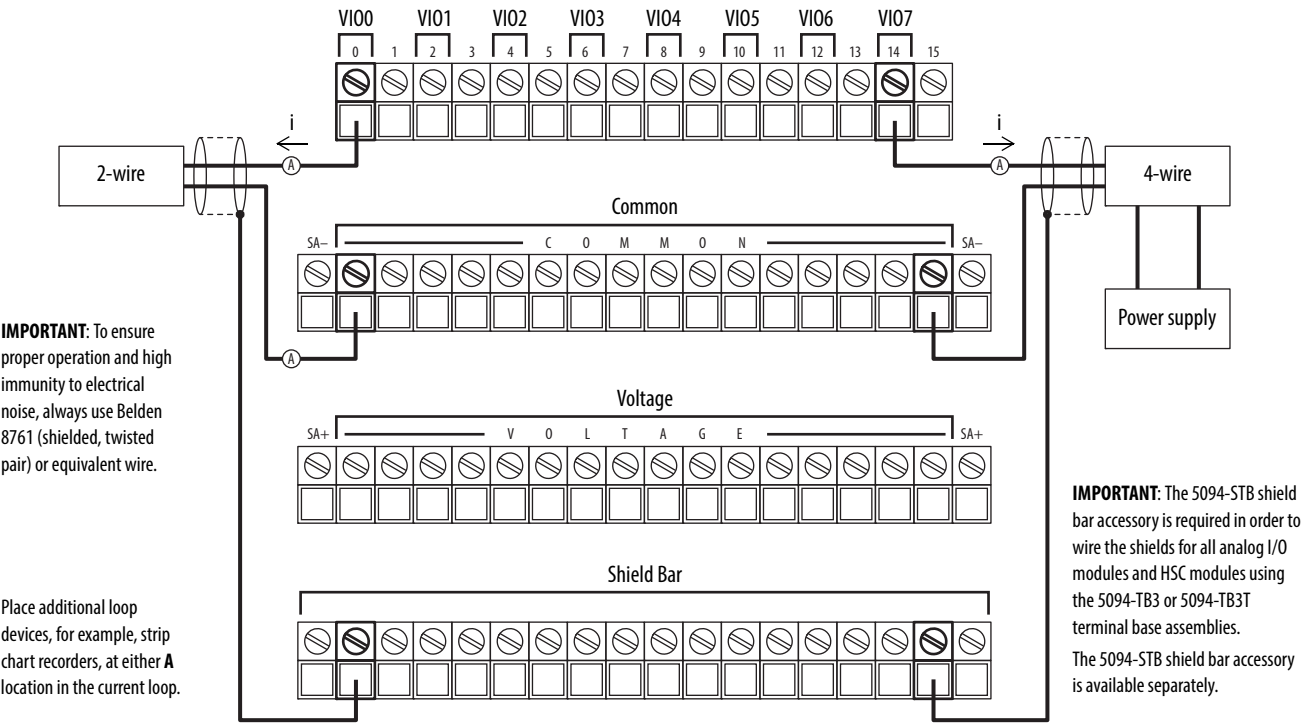


This figure shows a wiring diagram for the 5094-OF8 and 5094-OF8XT modules when used in voltage mode. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-OF8 and 5094-OF8XT Wiring Diagram – Voltage Mode

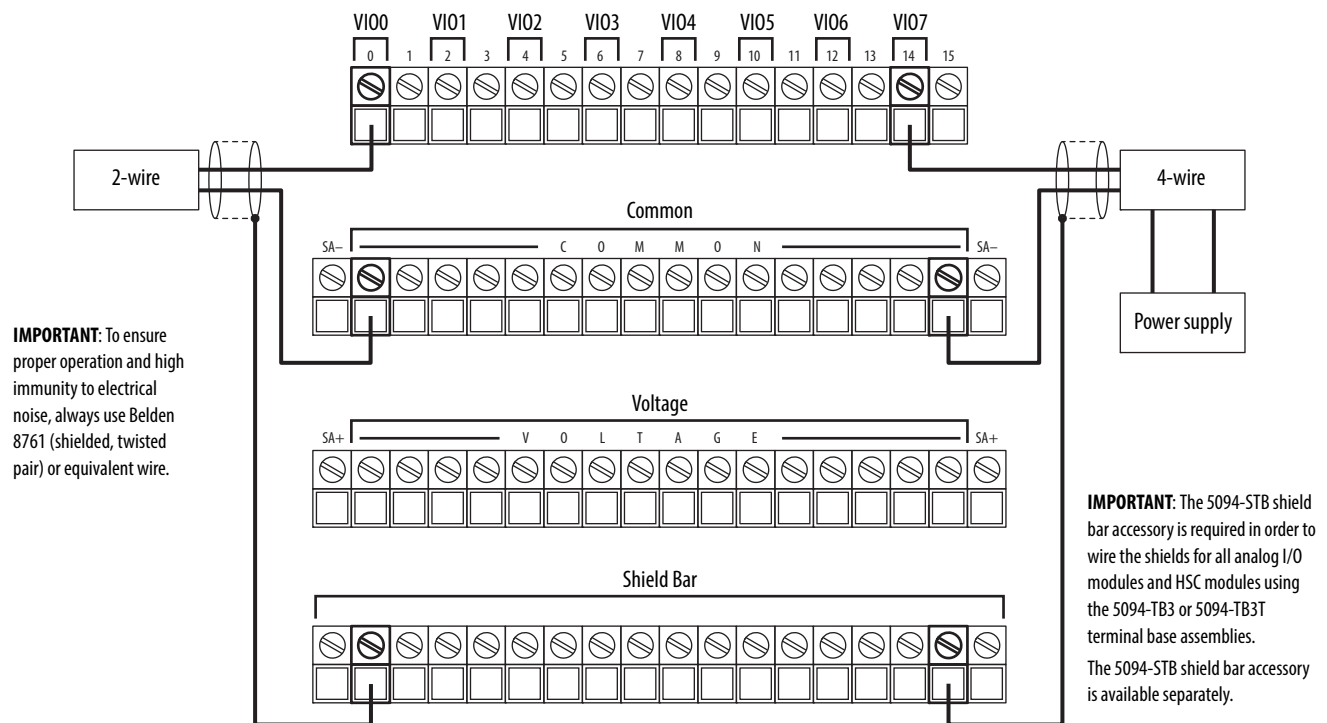

This figure shows a functional block diagram for the 5094-OF8 and 5094-OF8XT modules.

5094-OF8 and 5094-OF8XT Functional Block Diagram

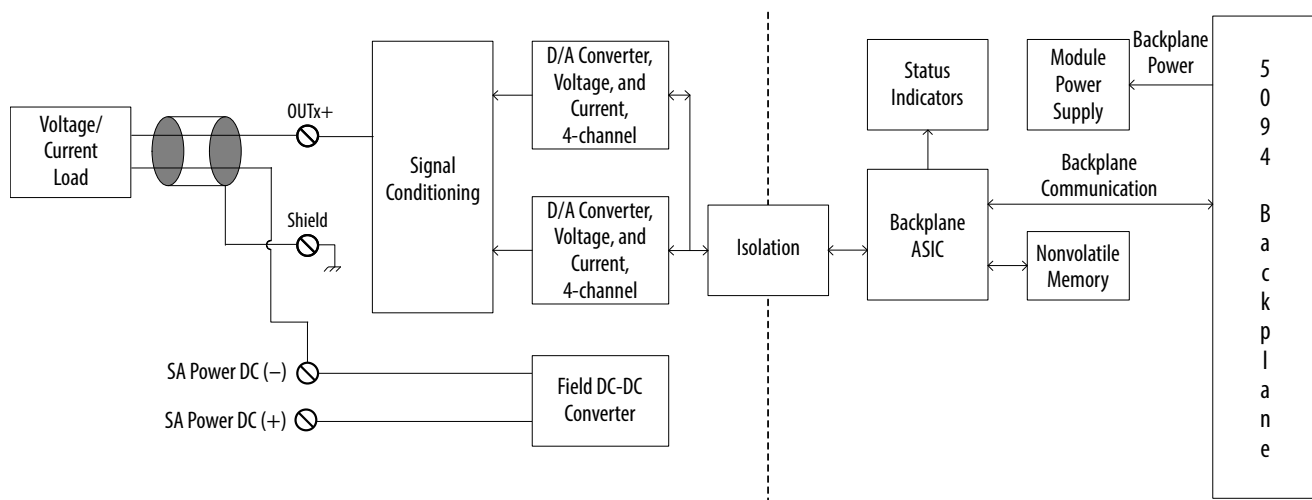

Technical Specifications - 5094-0F8, 5094-0F8XT

Attribute	Value
Outputs	8 single-ended
Output range, voltage	$\pm 10\text{V}$ 0...10V 0...5V
Output range, current	0...20 mA 4...20 mA
Resolution	16 bits across $\pm 10.5\text{V}$ - 320 $\mu\text{V/bit}$ 16 bits across 10.5V - 160 $\mu\text{V/bit}$ 16 bits across 5V - 80 $\mu\text{V/bit}$ 16 bits across 21 mA - 320 nA/bit
Drive capability	Voltage - 1000 Ω min Current - 500 Ω max
Capacitive load, max (voltage mode only)	1 μF
Inductive load, max (current mode only)	1 mH
Open circuit detection	Current mode only
Short circuit detection	Voltage mode only – output electronically limited to 16 mA or less
Data format	IEEE 754 32-bit floating point
Module conversion method	R-Ladder DAC, monotonicity with no missing codes
Conversion time per channel	25 μs
Scan time (per group 0...7)	2.0 ms
Step response time to 63% of value	Voltage mode: 18 μs max Current mode: 1 ms max
Overvoltage protection, max	$\pm 32\text{V DC}$
Repeatability	0.05%
Calibrated accuracy at 25 °C (77 °F)	Voltage: 0.10% full scale Current: 0.10% full scale
Accuracy drift with temperature	Voltage: 47 ppm/°C Current: 60 ppm/°C

General Specifications - 5094-0F8, 5094-0F8XT

Attribute	Value
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	75 mA
Sensor Actuator Power (SA) voltage range	18...32V DC
Sensor Actuator Power (SA) current, max	260 mA
Power dissipation, max	3.7 W
Thermal dissipation, max	12.62 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type, System to Field No isolation between SA Power and Output ports No isolation between individual Output ports
Calibration methods	Factory Calibrated User-performed (optional)
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 8 yellow/red I/O status indicators
Terminal base (TB) assembly	5094-TB3 (consists of a 5094-MB and 5094-RTB3) or 5094-TB3S (consists of a 5094-MB and 5094-RTB3S) or 5094-TB3XT (consists of a 5094-MBXT and 5094-RTB3XT) or 5094-TB3SXT (consists of a 5094-MBXT and 5094-RTB3SXT) IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	3  1
Wire category ⁽¹⁾	2 - shielded ports 2 - power ports
Wire size - Signal	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	108 g (0.24 lb)
Enclosure type	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

Environmental Specifications and Certifications

The tables below provide the environmental specifications and certifications for the FLEX 5000 analog I/O modules.

Environmental Specifications - FLEX 5000 Analog I/O Modules

Attribute	Value
Temperature, operating IEC 60068-2-1 (Test Ab, Operating Cold), IEC 60068-2-2 (TestBb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	-40 °C < Ta < +70 °C (-40 °F < Ta < +158 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Emissions	IEC 61000-6-4
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±4 kV @ 5 kHz on power ports ±3 kV @ 5 kHz on shielded ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±2 kV line-earth (CM) on shielded ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz
Corrosive resistance classification	ISA S71.04 G2 – Non-XT catalogs ISA S71.04 G3 – XT catalogs

Certifications - FLEX 5000 Analog I/O Modules

Certification⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.
CE	European Union 2014/30/EU EMC Directive, compliant with: • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: • EN 61010-2-201; Control Equipment Safety Requirements European Union 2011/65/EU RoHS, compliant with: • EN 50581; Technical documentation
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions
Ex	European Union 2014/34/EU ATEX Directive, compliant with: • EN 60079-0; General Requirements • EN 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • DEMKO 17 ATEX 1907X
IECEx	IECEx System, compliant with: • IEC 60079-0; General Requirements • IEC 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • IECEx UL 17.0066X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3

(1) When marked. See the Product Certification link at <http://www.ab.com> for Declarations of Conformity, Certificates, and other certification details.


Specialty Modules

I/O Type	Cat. No.	Page
High-speed counter	5094-HSC, 5094-HSCXT	36

5094-HSC and 5094-HSCXT High-speed Counter Modules


This figure shows a wiring diagram for the 5094-HSC and 5094-HSCXT modules connected to a differential encoder. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-HSC and 5094-HSCXT Wiring Diagram – Differential Encoder

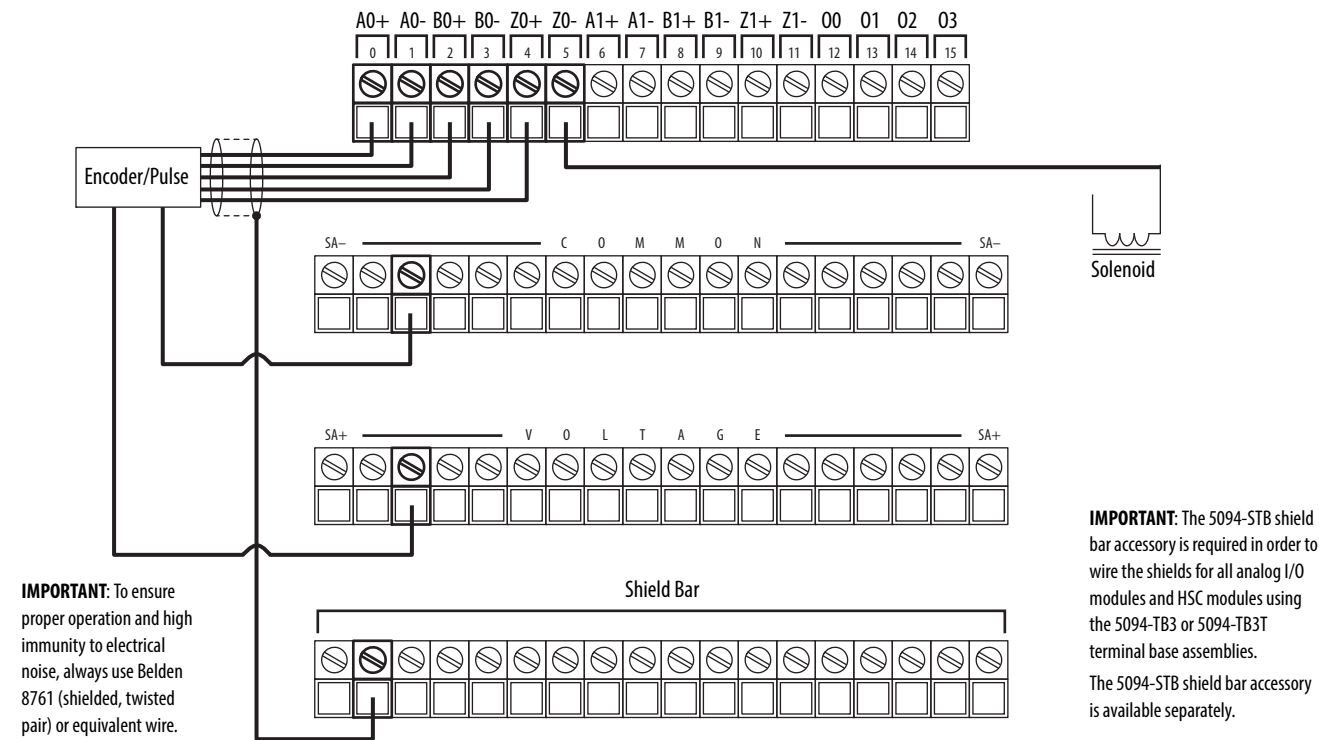


This figure shows a wiring diagram for the 5094-HSC and 5094-HSCXT modules connected to a single-ended encoder. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-HSC and 5094-HSCXT Wiring Diagram – Single-ended Encoder

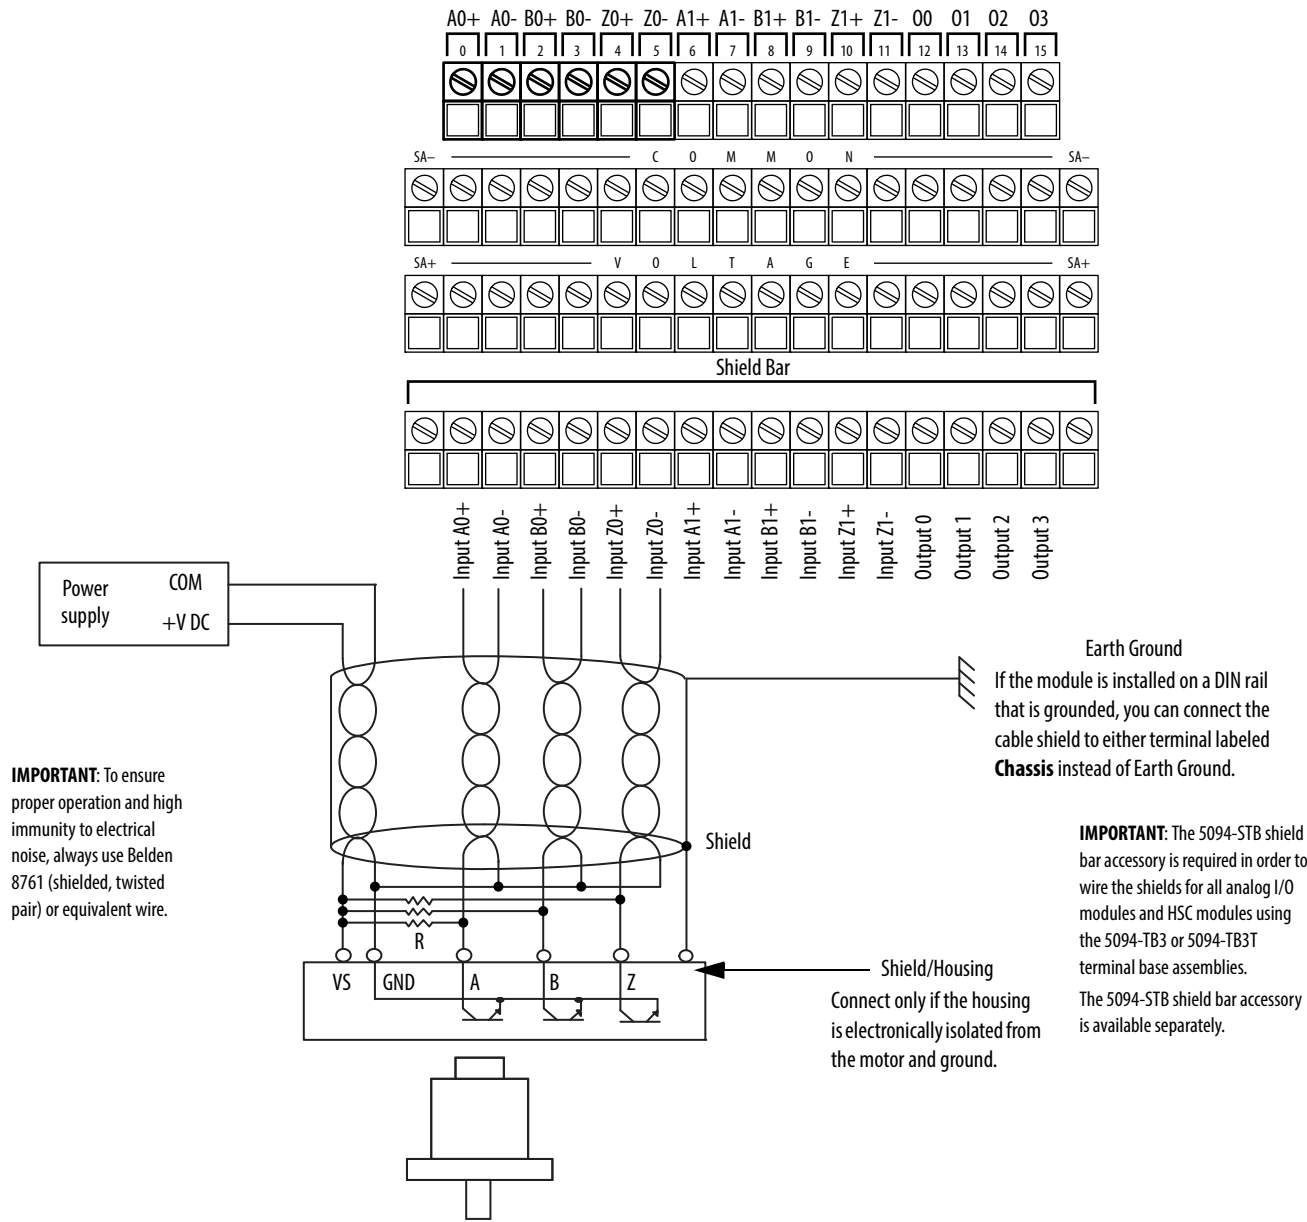

This figure shows a wiring diagram for the 5094-HSC and 5094-HSCXT modules connected to discrete input devices. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-HSC and 5094-HSCXT Wiring Diagram – Discrete Input Devices

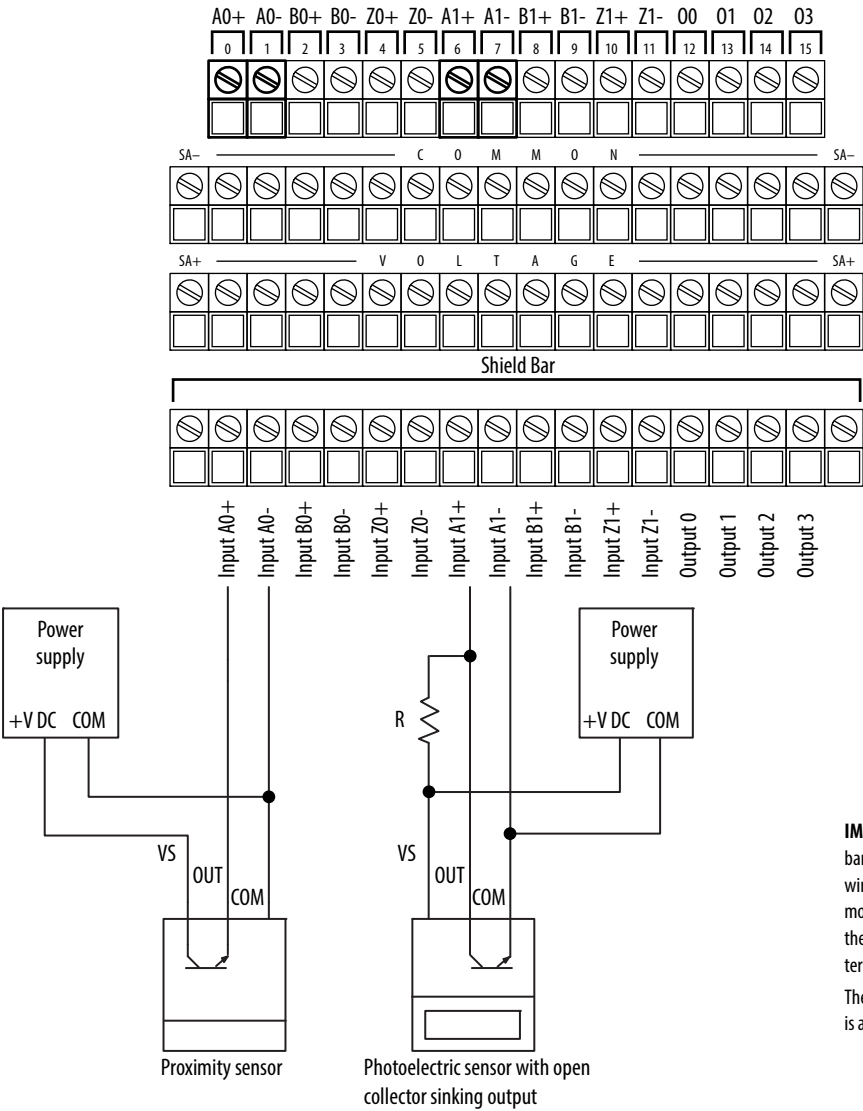


IMPORTANT: To ensure proper operation and high immunity to electrical noise, always use Belden 8761 (shielded, twisted pair) or equivalent wire.

IMPORTANT: The 5094-STB shield bar accessory is required in order to wire the shields for all analog I/O modules and HSC modules using the 5094-TB3 or 5094-TB3T terminal base assemblies. The 5094-STB shield bar accessory is available separately.

This figure shows a wiring diagram for the 5094-HSC and 5094-HSCXT modules connected to a discrete output device. You must connect a 24V DC power source to the left SA+/- terminals to provide field-side power.

5094-HSC and 5094-HSCXT Wiring Diagram – Discrete Output Device

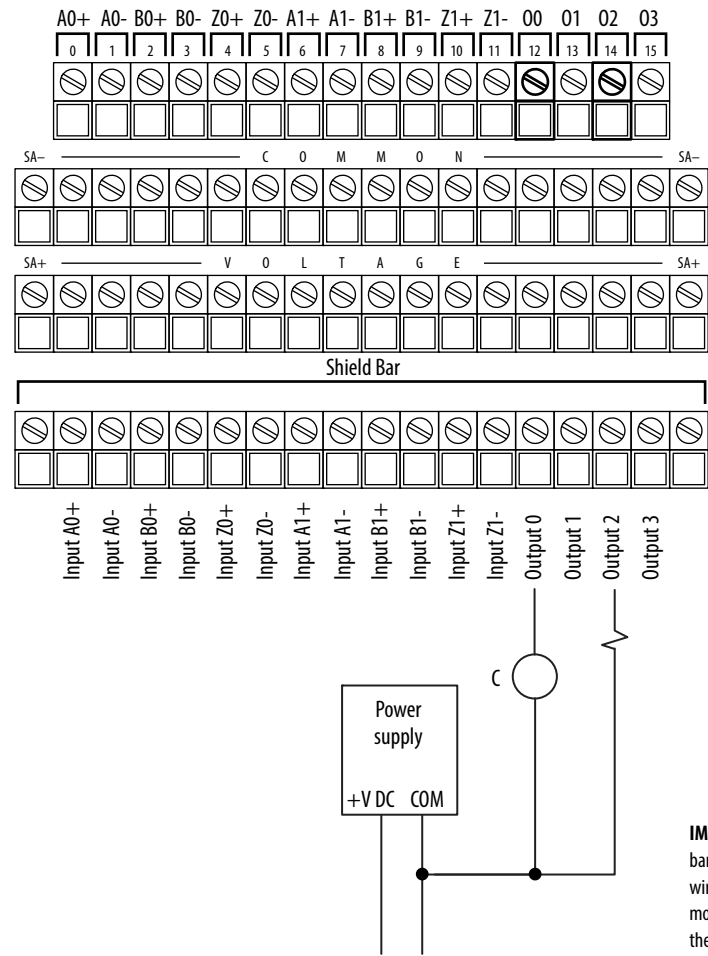


IMPORTANT: To ensure proper operation and high immunity to electrical noise, always use Belden 8761 (shielded, twisted pair) or equivalent wire.

IMPORTANT: The 5094-STB shield bar accessory is required in order to wire the shields for all analog I/O modules and HSC modules using the 5094-TB3 or 5094-TB3T terminal base assemblies. The 5094-STB shield bar accessory is available separately.


This figure shows functional block diagrams for the 5094-HSC and 5094-HSCXT modules inputs and outputs.

5094-HSC and 5094-HSCXT Functional Block Diagram

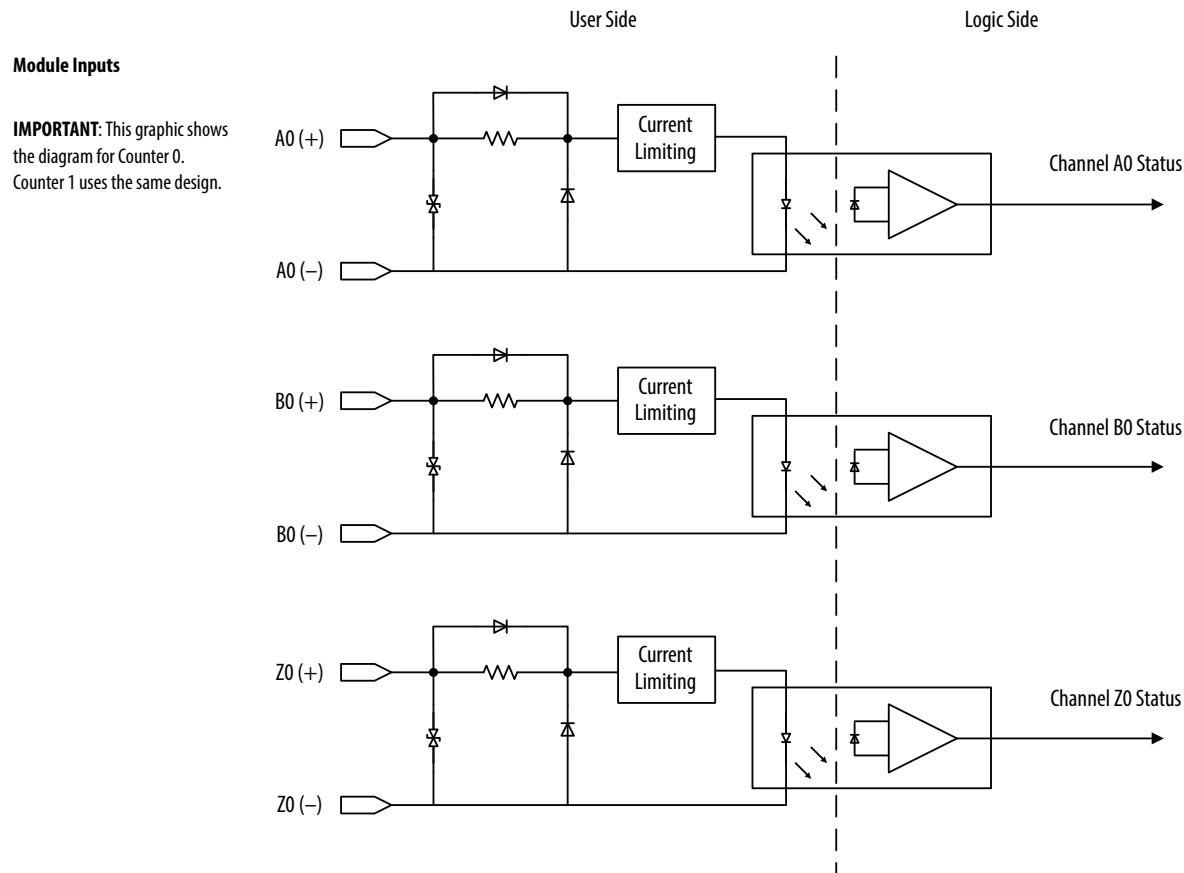

Module Outputs

Connections to the Power RTB on a FLEX 5000
EtherNet/IP adapter or external power supply.

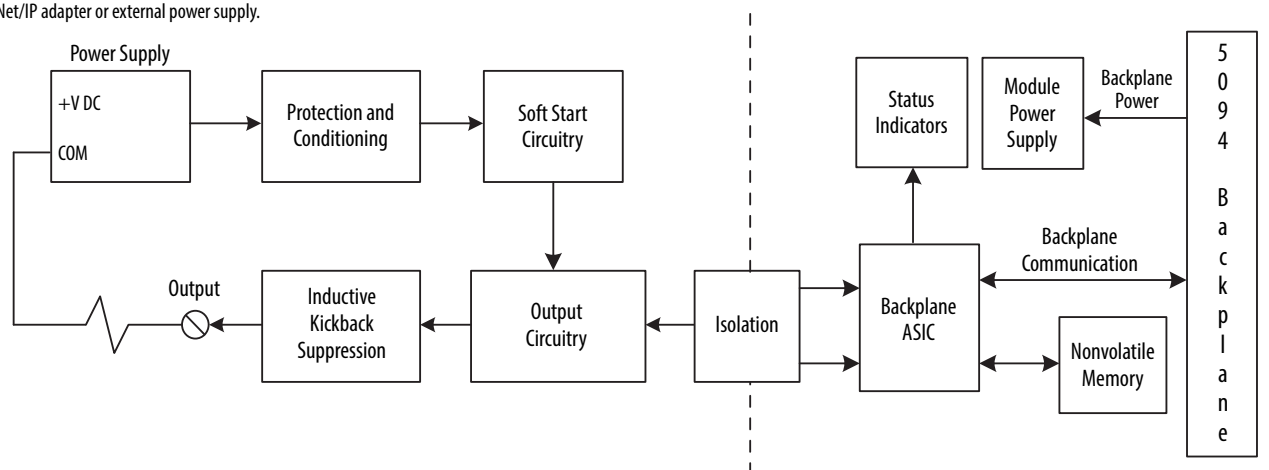

Technical Specifications - 5094-HSC, 5094-HSCXT

Attribute	Value
On-state voltage, min	18V DC
On-state voltage, nom	24V DC
On-state voltage, max	32V DC
On-state voltage drop, max	< 0.3V DC
On-state current, min	3 mA
Off-state voltage, max	1.5V
Off-state current, max	1 mA
Input ratings (IN), max	8 mA per channel @ 18...32V DC
Output ratings (OUT)	1 A @ 18...32V DC per channel 3 A per module
Pulse width, min	125 ns
Pulse separation, min	100 ns
Open load detection diagnostics	Yes (per channel diagnostics)
Output short circuit/overload/overtmp detection	Yes (per channel diagnostics)
Output short circuit/overload protection	Yes
Reverse voltage protection	32V DC
Overvoltage protection, max	36V (fuse protected, non-replaceable)
Pilot duty rating	0.5 A resistive and general pilot duty
Increased output current capability	Outputs can be paralleled to increase current capability by 1 A per channel. Total current per module is limited to 3 A.
Output control in fault state per point	• Hold last state • On • Off (default)
Output states in program mode per point	• Hold last state • On • Off (default)
Output states in fault mode per point	• Hold Last State • On • Off (default)
Duration of fault mode per point	• 1 s • 2 s • 5 s • 10 s • Forever (default)
CIP sync	Supported

General Specifications - 5094-HSC, 5094-HSCXT

Attribute	Value
Inputs	2 quadrature (ABZ) differential inputs
Outputs	4 Channels (1 group of 4), sourcing
Voltage category	24V DC source
Input range, voltage	3...32V DC
Backplane Power (BP) voltage	15V DC
Backplane Power (BP) current, max	67 mA
Sensor Actuator Power (SA) voltage range	18...32V DC
Sensor Actuator Power (SA) current, max	3 A
Power dissipation, max	3.5 W
Thermal dissipation, max	11.9 BTU/hr
Isolation voltage	250V (continuous), Basic Insulation Type 250V isolation between input ports to output ports 250V isolation between I/O ports and Backplane Circuits No isolation between individual I/O ports Type tested @ 1500V AC for 60 s
Module keying	Mechanical keying or electronic keying via programming software
Indicators	1 green/red module status indicator 1 green/red SA power status indicator 10 yellow/red I/O status indicator
Terminal base (TB) assembly	5094-TB3T (consists of a 5094-MB and 5094-RTB3T) or 5094-TB3TS (consists of a 5094-MB and 5094-RTB3TS) or 5094-TB3TXT (consists of a 5094-MBXT and 5094-RTB3TXT) or 5094-TB3TSXT (consists of a 5094-MBXT and 5094-RTB3TSXT) IMPORTANT: You must order mounting bases (MBs) and removable terminal blocks (RTBs) separately. MBs and RTBs do not ship with FLEX 5000 I/O modules.
TB keying	4  1
Wiring category ⁽¹⁾	2 - on output ports 2 - on output power ports 2 - on shielded counter ports
Wire size - Signal	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105°C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Wire size - Power	2.5 mm ² (14 AWG) Cu multi strand
Dimensions (HxWxD), approx	68.57 x 94 x 49.75 mm (2.7 x 3.7 x 1.96 in.)
Weight, approx	143 g (0.32 lb)
Enclosure type	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEX temp code	T4

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications - 5094-HSC, 5094-HSCXT

Attribute	Value
Temperature, operating IEC 60068-2-1 (Test Ab, Operating Cold), IEC 60068-2-2 (TestBb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	-40 °C < Ta < +70 °C (-40 °F < Ta < +158 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Emissions	IEC 61000-6-4
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±4 kV @ 5 kHz on power ports ±4 kV @ 5 kHz on output ports ±4 kV @ 5 kHz on shielded input ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±2 kV line-earth (CM) on output ports ±1 kV line-earth (CM) on input ports
Conducted RF immunity IEC 61000-4-6	10Vrms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz
Corrosion resistance classification	ISA S71.04 G2 – 5094-HSC ISA S71.04 G3 – 5094-HSCXT

Certifications - 5094-HSC, 5094-HSCXT

Certification⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.
CE	European Union 2014/30/EU EMC Directive, compliant with: • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: • EN 61010-2-201; Control Equipment Safety Requirements European Union 2011/65/EU RoHS, compliant with: • EN 50581; Technical Documentation
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions
Ex	European Union 2014/34/EU ATEX Directive, compliant with: • EN 60079-0; General Requirements • EN 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • DEMKO 17 ATEX 1922X
IECEx	IECEx System, compliant with: • IEC 60079-0; General Requirements • IEC 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • IECEx UL 17.0075X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3

(1) When marked. See the Product Certification link at <http://www.ab.com> for Declarations of Conformity, Certificates, and other certification details.

EtherNet/IP Adapters


Type	Cat. No.	Page
EtherNet/IP adapters with RJ45 ports	5094-AENTR, 5094-AENTRXT 5094-AEN2TR, 5094-AEN2TRXT	46

Environmental specifications and certifications for FLEX 5000 EtherNet/IP adapters are provided on [page 48](#).

FLEX 5000 EtherNet/IP Adapters with RJ45 Ports (5094-AENTR, 5094-AENTRXT, 5094-AEN2TR, 5094-AEN2TRXT)

This figure shows a wiring diagram for how to connect power to the FLEX 5000 EtherNet/IP adapter.

5094-AENTR and 5094-AENTRXT Wiring Diagram – MOD Power (DC)

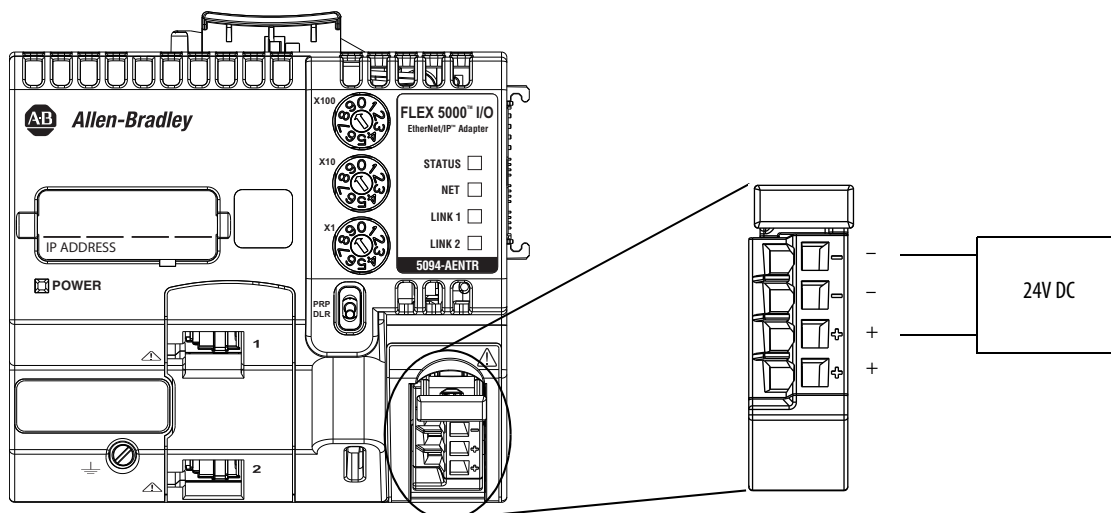

Technical Specifications - 5094-AENTR, 5094-AENTRXT, 5094-AEN2TR, 5094-AEN2TRXT

Attribute	5094-AENTR, 5094-AENTRXT	5094-AEN2TR, 5094-AEN2TRXT
Voltage and current ratings, MP	18...32V DC, 1250 mA	18...32V DC, 1880 mA
Voltage and current ratings, MP inrush	18...32VDC, 3200 mA for 100 ms	18...32V DC, 5700 mA for 100 ms
Voltage and current ratings, backplane	15V DC, 1130 mA	15V DC, 1800 mA
Recommended external overcurrent protection	MOD Power: 10...12A @ 22.5...43.2 A2t, Fast Acting SA Power: 20 A @ 250V AC	
Power dissipation, max	5.1 W @ 18V DC	6.2 W @ 18V DC
Thermal dissipation, max	17.4 BTU/hr @ 24V DC	21.1 BTU/hr @ 24V DC
Isolation voltage	300V (continuous), Basic Insulation Type Tested @ 2121V AC for 60 s, Power to Backplane and Backplane to Ethernet Tested @ 4242V DC for 60s, Power to Ethernet ports No isolation between Ethernet ports	
DIN rail	Compatible zinc-plated, chromate-passivated steel DIN rail. EN60715 - 35 x 7.5 mm (1.38 x 0.30 in.)	
Removable terminal block (RTB)	Your adapter comes with a screw-type RTB. You can order screw-type or spring-type RTBs separately: • 5094-AENRTB-QTY5 – Ethernet Adapter RTB, Screw-type, Pack of 5 • 5094-AENRTBS-QTY5 – Ethernet Adapter RTB, Spring-type, Pack of 5	
Terminal block torque, power RTB	Screw-type RTB: 0.4 N·m (3.5 lb·in) Spring-type RTB: Not applicable	
Terminal block torque, functional earth terminal	0.5 N·m (4.4 lb·in)	
Wiring category ^{(1), (2)}	1 - on power ports 1- on Ethernet ports	
Wire type	Copper	
Wire size, power RTB	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max, single wire connection only. Ferrule according to DIN 46 228/1.	
Wire size, functional earth terminal	2.5 mm ² (14 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 3.5 mm (0.14 in.) max diameter including insulation, single wire connection only.	

Technical Specifications - 5094-AENTR, 5094-AENTRXT, 5094-AEN2TR, 5094-AEN2TRXT

Attribute	5094-AENTR, 5094-AENTRXT	5094-AEN2TR, 5094-AEN2TRXT
Insulation stripping length, power RTB	Screw-type RTB connections: • $0.34 \dots 2.5 \text{ mm}^2$ (22...14 AWG) = $12 \pm 1 \text{ mm}$ (0.47 in $\pm$ 0.04 in.) Spring-type RTB connections: • $0.34 \dots 1.5 \text{ mm}^2$ (22...16 AWG) = $10 \pm 1 \text{ mm}$ (0.39 in $\pm$ 0.04 in.) • 2.5 mm^2 (14 AWG) = $15 \pm 1 \text{ mm}$ (0.59 in $\pm$ 0.04 in.)	
Insulation stripping length, functional earth terminal	8 mm (0.31 in.)	
Dimensions (HxWxD), approx	85.1 x 94.0 x 96.6 mm (3.35 x 3.70 x 3.80 in.)	
Weight, approx	400 g (0.88 lb)	
Enclosure type rating	None (open-style)	
North American temp code	T4	
ATEX temp code	T4	
IECEx temp code	T4	

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

(2) Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

Environmental Specifications and Certifications

The tables below provide the environmental specifications and certifications for the FLEX 5000 EtherNet/IP adapters.

Environmental Specifications - FLEX 5000 EtherNet/IP Adapters

Attribute	Value
Temperature, operating IEC 60068-2-1 (Test Ab, Operating Cold), IEC 60068-2-2 (TestBb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	-40 °C < Ta < +70 °C (-40 °F < Ta < +158 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Emissions	IEC 61000-6-4
ESD immunity IEC61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC61000-4-3	10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±4 kV @ 5 kHz on power ports ±4 kV @ 5 kHz on Ethernet ports
Surge transient immunity IEC 61000-4-5	±2 kV line-line (DM) and ±4 kV line-earth (CM) on power ports ±2 kV line-earth (CM) on Ethernet ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz
Corrosion resistance classification	ISA S71.04 G2 – Non-XT catalogs ISA S71.04 G3 – XT catalogs
Voltage variation IEC61000-4-29	10 ms interruption on DC supply ports

Certifications - FLEX 5000 EtherNet/IP Adapters

Certifications⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.
CE	European Union 2014/30/EU EMC Directive, compliant with: • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: • EN 61010-2-201; Control Equipment Safety Requirements European Union 2011/65/EU RoHS, compliant with: • EN 50581; Technical documentation
RCM	Australian Radiocommunications Act, compliant with: • EN 61000-6-4; Industrial Emissions
Ex	European Union 2014/34/EU ATEX Directive, compliant with: • EN 60079-0; General Requirements • EN 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • DEMKO 17 ATEX 1898X
IECEx	IECEx System, compliant with: • IEC 60079-0; General Requirements • IEC 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • IECEx UL 17.0047X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: • Article 58-2 of Radio Waves Act, Clause 3
EtherNet/IP	ODVA conformance tested to EtherNet/IP specifications

(1) When marked. See the Product Certification link at <http://www.ab.com> for Declarations of Conformity, Certificates, and other certification details.

Terminal Base Assemblies

Terminal base (TB) assemblies consists of a mounting base (MB) and removable terminal block (RTB). MBs and RTBs are available for order individually.


Type	Cat. No.	Page
Mounting bases	5094-MB, 5094-MBXT	51
Terminal blocks	5094-RTB3, 5094-RTB3XT, 5094-RTB3S, 5094-RTB3SXT	52
CJC terminal blocks	5094-RTB3T, 5094-RTB3TXT, 5094-RTB3TS, 5094-RTB3TSXT	53
Relay terminal blocks	5094-RTB3W, 5094-RTB3WXT, 5094-RTB3WS, 5094-RTB3WSXT	54

Environmental specifications and certifications for FLEX 5000 terminal base assemblies are provided on [page 55](#).

5094-MB and 5094-MBXT Mounting Bases

This figure shows a diagram for the 5094-MB mounting base.

5094-MB Diagram

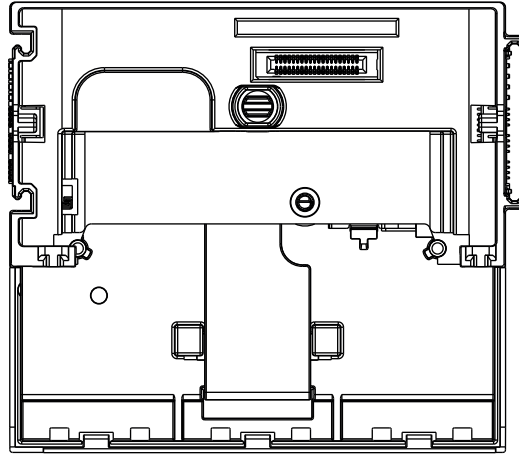


Attribute	Value
Backplane power (BP), max	100 mA @ 15V DC
Backplane power (VCC), max	15 mA @ 3.3V
DIN rail	Compatible zinc-plated, chromate-passivated steel DIN rail. EN60715 - 35 x 7.5 mm (1.38 x 0.30 in.)
Removable terminal block (RTB)	5094-RTB3, 5094-RTB3XT, 5094-RTB3S, 5094-RTB3SXT, 5094-RTB3T, 5094-RTB3TXT, 5094-RTB3TS, 5094-RTB3TSXT, 5094-RTB3W, 5094-RTB3WXT, 5094-RTB3WS, 5094-RTB3WSXT, 5094-RTB3I, 5094-RTB3IXT, 5094-RTB3IS, 5094-RTB3ISXT IMPORTANT: You must order RTBs separately. RTBs do not ship with FLEX 5000 I/O modules.
Dimensions (HxWxD), approx	100.9 x 93.6 x 101.4 mm (3.97 x 3.68 x 3.99 in.) Includes removable terminal block and installed module
Weight, approx	71g (0.16 lb)
Enclosure type rating	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEX temp code	T4

5094-RTB3, 5094-RTB3XT, 5094-RTB3S, and 5094-RTB3SXT Terminal Blocks

This figure shows a diagram for the 5094-RTB3 terminal block.

5094-RTB3 Diagram

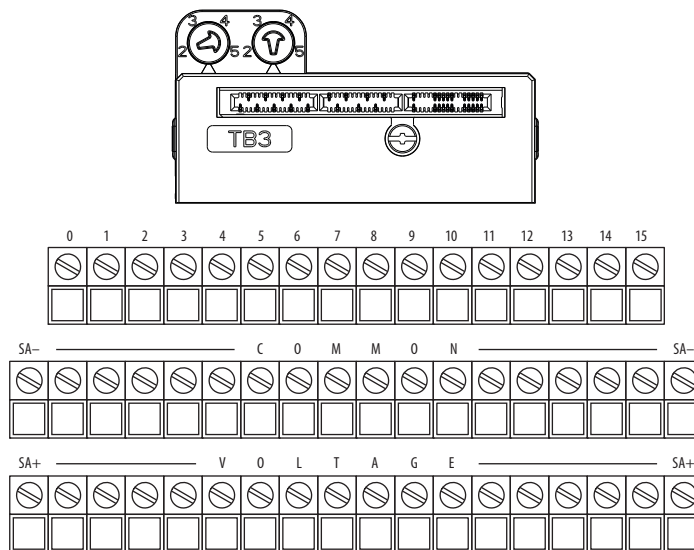

General Specifications - 5094-RTB3, 5094-RTB3XT, 5094-RTB3S, 5094-RTB3SXT


Attribute	Value
Input/output ratings (IN/OUT), max	2 A @ 32V DC
Sensor Actuator Power (SA), max	10 A @ 18...32V DC
Do not exceed 10 A MOD Power or SA Power passthrough current draw. ⁽¹⁾	
Isolation voltage	250V (Continuous), Basic Insulation Type, Channels to Chassis 250V (Continuous), Basic Insulation Type, SA to Chassis
Wire category	Established by installed module
Wire type	Copper
Wire size	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Insulation stripping length	Screw-type TB: • 0.34...2.5 mm ² (22...14 AWG) = 12 mm ± 1 mm (0.47 ± 0.04 in.) Spring-type TB: • 0.34...1.5 mm ² (22...16 AWG) = 10 mm ± 1 mm (0.39 ± 0.04 in.) • 2.5 mm ² (14 AWG) = 15 mm ± 1 mm (0.59 ± 0.04 in.)
TB torque specifications	Screw-type TB: 0.4 N·m (3.5 lb-in) Spring-type TB: Not applicable
Dimensions (HxWxD), approx	100.9 x 93.6 x 101.4 mm (3.97 x 3.68 x 3.99 in.) Includes mounting base and installed module
Weight, approx	202 g (0.45 lb)
Enclosure type rating	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Maximum level of SA Power current that the module is capable of passing through to the next module in the system. The specific level of current passed through varies based on system configuration.

5094-RTB3T, 5094-RTB3TXT, 5094-RTB3TS, and 5094-RTB3TSXT Terminal Blocks

This figure shows a diagram for the 5094-RTB3T terminal block.

5094-RTB3T Diagram

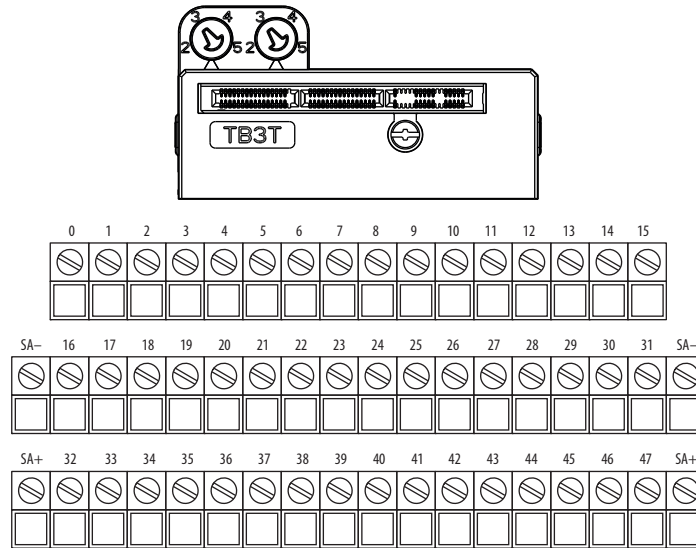

General Specifications - 5094-RTB3T, 5094-RTB3TXT, 5094-RTB3TS, 5094-RTB3TSXT


Attribute	Value
Input ratings (IN), max	100 mA @ 10V DC
Sensor Source Voltage (SSV) output ratings, max	1.8 A @ 24V DC
Sensor Actuator Power (SA), max	10 A @ 18...32V DC
Do not exceed 10 A MOD Power or SA Power passthrough current draw. ⁽¹⁾	
Isolation voltage	250V (Continuous), Basic Insulation Type, Channels to Chassis 250V (Continuous), Basic Insulation Type, SA to Chassis
Wire category	Established by installed module
Wire type	Copper
Wire size	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Insulation stripping length	Screw-type TB: • 0.34...2.5 mm ² (22...14 AWG) = 12 mm ± 1 mm (0.47 ± 0.04 in.) Spring-type TB: • 0.34...1.5 mm ² (22...16 AWG) = 10 mm ± 1 mm (0.39 ± 0.04 in.) • 2.5 mm ² (14 AWG) = 15 mm ± 1 mm (0.59 ± 0.04 in.)
TB torque specifications	Screw-type TB: 0.4 N•m (3.5 lb•in) Spring-type TB: Not applicable
Dimensions (HxWxD), approx	100.9 x 93.6 x 101.4 mm (3.97 x 3.68 x 3.99 in.) Includes mounting base and installed module
Weight, approx	202 g (0.45 lb)
Enclosure type rating	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Maximum level of SA Power current that the module is capable of passing through to the next module in the system. The specific level of current passed through varies based on system configuration.

5094-RTB3W, 5094-RTB3WXT, 5094-RTB3WS, and 5094-RTB3WSXT Terminal Blocks

This figure shows a diagram for the 5094-RTB3W terminal block.

5094-RTB3W Diagram

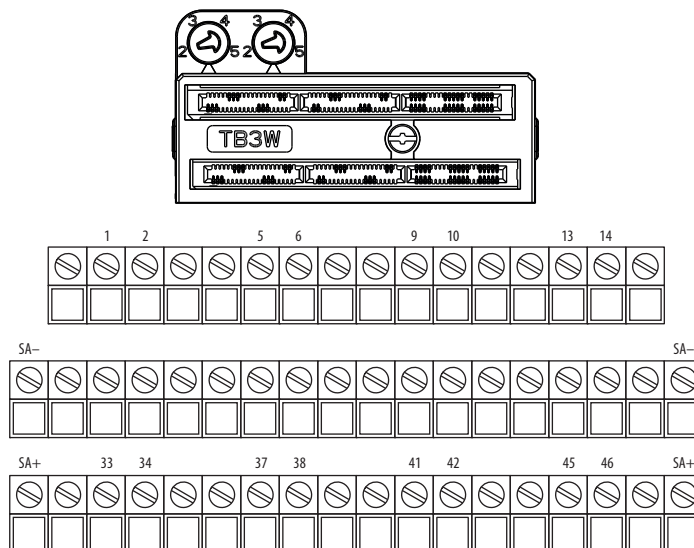

General Specifications - 5094-RTB3W, 5094-RTB3WXT, 5094-RTB3WS, 5094-RTB3WSXT

Attribute	Value
Output ratings (OUT), max	2 A @ 125V DC 2 A @ 240V AC, 50/60 Hz
Sensor Actuator Power (SA), max	10 A @ 18...32V DC
Do not exceed 10 A MOD Power or SA Power passthrough current draw. ⁽¹⁾	
Isolation voltage	250V (Continuous), Reinforced Insulation Type, Channels to Chassis 250V (Continuous), Reinforced Insulation Type, Channels to SA 250V (Continuous), Basic Insulation Type, SA to Chassis
Wire category	Established by installed module
Wire type	Copper
Wire size	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Insulation stripping length	Screw-type TB: • 0.34...2.5 mm ² (22...14 AWG) = 12 mm ± 1 mm (0.47 ± 0.04 in.) Spring-type TB: • 0.34...1.5 mm ² (22...16 AWG) = 10 mm ± 1 mm (0.39 ± 0.04 in.) • 2.5 mm ² (14 AWG) = 15 mm ± 1 mm (0.59 ± 0.04 in.)
TB torque specifications	Screw-type TB: 0.4 N·m (3.5 lb-in) Spring-type TB: Not applicable
Dimensions (HxWxD), approx	100.9 x 93.6 x 101.4 mm (3.97 x 3.68 x 3.99 in.) Includes mounting base and installed module
Weight, approx	202 g (0.45 lb)
Enclosure type rating	None (open-style)
North American temp code	T4
ATEX temp code	T4
IECEx temp code	T4

(1) Maximum level of SA Power current that the module is capable of passing through to the next module in the system. The specific level of current passed through varies based on system configuration.

Environmental Specifications and Certifications

The tables below provide the environmental specifications and certifications for the FLEX 5000 terminal base assemblies.

Environmental Specifications - FLEX 5000 Terminal Base Assemblies

Attribute	Value
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-40 °C < Ta < +70 °C (-40 °F < Ta < +158 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Corrosion resistance classification	ISA S71.04 G2 – Non-XT catalogs ISA S71.04 G3 – XT catalogs

Certifications - FLEX 5000 Terminal Base Assemblies

Certification ⁽¹⁾	Value
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.
CE	European Union 2014/30/EU EMC Directive, compliant with: • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: – For RTBs • EN 61010-2-201; Control Equipment Safety Requirements European Union 2011/65/EU RoHS, compliant with: • EN 50581; Technical Documentation
RCM	Australian Radiocommunications Act, compliant with: • EN 61000-6-4; Industrial Emissions
Ex	European Union 2014/34/EU ATEX Directive, compliant with: • EN 60079-0; General Requirements • EN 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • DEMKO 17 ATEX 1922X
IECEx	IECEx System, compliant with: • IEC 60079-0; General Requirements • IEC 60079-15; Potentially Explosive Atmospheres, Protection “n” • II 3 G Ex nA IIC T4 Gc • IECEx UL 17.0075X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3

(1) See the Product Certification link at <http://www.ab.com> for Declarations of Conformity, Certificates, and other certification details.


Accessories

Type	Cat. No.	Page
Shield bar	5094-STB	57
SA power jumper	5094-SAJMPR	57
Dummy filler module	5094-N2	58

5094-STB Shield Bar

This figure shows a diagram for the 5094-STB shield bar.

5094-STB Diagram

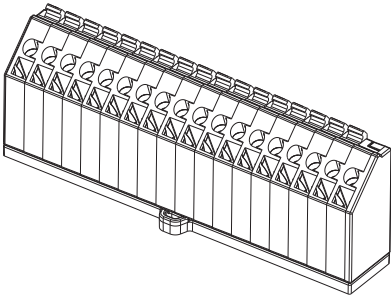


General Specifications - 5094-STB

Attribute	Value
Voltage, max	300V AC
Current, max	10 A
Wire size	0.34...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Ferrule according to DIN 46 228/1.
Insulation stripping length	12 mm ± 1 mm (0.47 ± 0.04 in.)
Torque specifications	0.4 N•m (3.5 lb•in)
Dimensions (HxWxD), approx	33.2 x 93.6 x 23.7 mm (1.30 x3.68 x 0.93 in.)
Weight, approx	56 g (1.97 oz.)
Enclosure type rating	None (open-style)

5094-SAJMPR SA Power Jumper

This figure shows a diagram for the 5094-SAJMPR SA power jumper.

5094-SAJMPR Diagram



General Specifications - 5094-SAJMPR


Attribute	Value
Voltage, max	300V AC
Current, max	10 A

Environmental Specifications - 5094-SAJMPR

Attribute	Value
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-40 °C < Ta < +70 °C (-40 °F < Ta < +158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)

5094-N2 Dummy Filler Module

This module is used to fill in an otherwise empty slot: a terminal base assembly with no I/O module. It contains no electronics.

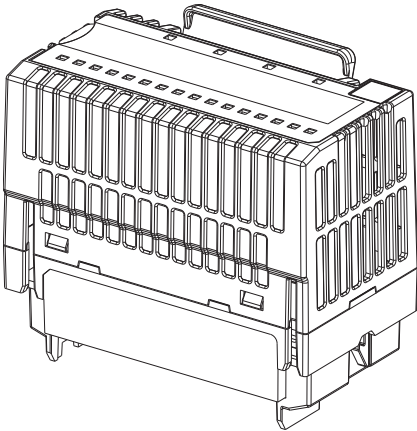

Additional Resources

These documents contain more information about related products from Rockwell Automation.

Resource	Description
FLEX 5000 EtherNet/IP Adapters with RJ45 Ports Installation Instructions, publication 5094-IN001	Describes how to install and wire the FLEX 5000 EtherNet/IP adapters.
FLEX 5000 Digital 16-point Sinking Input Modules Installation Instructions, publication 5094-IN003	Describes how to install and wire the FLEX 5000 digital input modules.
FLEX 5000 Digital 16-point Sourcing Output Modules Installation Instructions, publication 5094-IN004	Describes how to install and wire the FLEX 5000 digital output modules.
FLEX 5000 Digital 8-point Isolated Relay Output Module Installation Instructions, publication 5094-IN005	Describes how to install and wire the FLEX 5000 digital output modules.
FLEX 5000 Analog 8-channel Current/Voltage Input Modules Installation Instructions, publication 5094-IN006	Describes how to install and wire the FLEX 5000 analog current/voltage input modules.
FLEX 5000 Analog 8-channel Current/Voltage Output Modules Installation Instructions, publication 5094-IN007	Describes how to install and wire the FLEX 5000 analog current/voltage output modules.
FLEX 5000 Analog 8-channel Current/Voltage/RTD/Thermocouple Input Modules Installation Instructions, publication 5094-IN008	Describes how to install and wire the FLEX 5000 analog current/voltage/RTD/thermocouple input modules.
FLEX 5000 High-speed Counter Modules Installation Instructions, publication 5094-IN009	Describes how to install and wire the FLEX 5000 high-speed counter modules.
FLEX 5000 Terminal Base Assembly Modules Installation Instructions, publication 5094-IN010	Describes how to install the FLEX 5000 terminal base assemblies.
Replacement Guidelines: Logix5000 Controllers Reference Manual, publication 1756-RM100	Provides guidelines on how to replace the following: - ControlLogix 5560/5570 controller with a ControlLogix 5580 controller - CompactLogix 5370 L3 controllers with a CompactLogix 5380 controller
EtherNet/IP Communication Modules in 5000 Series Systems User Manual, publication ENET-UM004	Describes how to install, configure, and operate the FLEX 5000 EtherNet/IP adapters.
FLEX 5000 Digital I/O Modules User Manual, publication 5094-UM001	Provides information on how to install, configure, and operate FLEX 5000 digital I/O modules.
FLEX 5000 Analog I/O Modules User Manual, publication 5094-UM002	Provides information on how to install, configure, and operate FLEX 5000 analog I/O modules.
FLEX 5000 High-speed Counter Module User Manual, publication 5094-UM003	Provides information on how to install, configure, and operate FLEX 5000 high-speed counter modules.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, http://www.rockwellautomation.com/rockwellautomation/certification/overview.page	Provides declarations of conformity, certificates, and other certification details.

You can view or download publications at <http://www.rockwellautomation.com/literature/>. To order paper copies of technical documentation, contact your local Allen-Bradley distributor or Rockwell Automation sales representative.

Rockwell Automation Support

Use the following resources to access support information.

Technical Support Center	Knowledgebase Articles, How-to Videos, FAQs, Chat, User Forums, and Product Notification Updates.	www.rockwellautomation.com/knowledgebase
Local Technical Support Phone Numbers	Locate the phone number for your country.	www.rockwellautomation.com/global/support/get-support-now.page
Direct Dial Codes	Find the Direct Dial Code for your product. Use the code to route your call directly to a technical support engineer.	www.rockwellautomation.com/global/support/direct-dial.page
Literature Library	Installation Instructions, Manuals, Brochures, and Technical Data.	www.rockwellautomation.com/literature
Product Compatibility and Download Center (PCDC)	Get help determining how products interact, check features and capabilities, and find associated firmware.	www.rockwellautomation.com/global/support/pcdc.page

Documentation Feedback

Your comments will help us serve your documentation needs better. If you have any suggestions on how to improve this document, complete the How Are We Doing? form at http://literature.rockwellautomation.com/idc/groups/literature/documents/du/ra-du002_-en-e.pdf.

Rockwell Automation maintains current product environmental information on its website at <http://www.rockwellautomation.com/rockwellautomation/about-us/sustainability-ethics/product-environmental-compliance.page>.

Allen-Bradley, CompactLogix, ControlLogix, LISTEN. THINK. SOLVE, Logix 5000, FLEX 5000, Rockwell Automation, Rockwell Software, and Studio 5000 Logix Designer are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846