

Potentiometer Devices*



Cat. No. 800T-U24



Cat. No. 800H-UR4

Resistance	Type 4/13	Type 4/4X/13	Resistance	Type 4/13	Type 4/4X/13
	Potentiometer†	Potentiometer†		Potentiometer†	Potentiometer†
	Cat. No.	Cat. No.		Cat. No.	Cat. No.
Operator Only without Resistive Element	800T-N37§	800H-N102§	25 kΩ	800T-U37	800H-UR37
150 Ω	800T-U4	800H-UR4	50 kΩ	800T-U41	800H-UR41
500 Ω	800T-U12	800H-UR12	75 kΩ	800T-U46	800H-UR46
1000 Ω	800T-U13	800H-UR13	100 kΩ	800T-U49	800H-UR49
1500 Ω	800T-U16	800H-UR16	150 kΩ	800T-U50	800H-UR50
2500 Ω	800T-U19	800H-UR19	400 kΩ	800T-U54	800H-UR54
5000 Ω	800T-U24	800H-UR24	500 kΩ	800T-U55	800H-UR55
10 kΩ	800T-U29	800H-UR29	1 MΩ	800T-U57	800H-UR57
15 kΩ	800T-U34	800H-UR34	2 MΩ	800T-U59	800H-UR59
20 kΩ	800T-U35	800H-UR35	3 MΩ	800T-U62	800H-UR62
			4 MΩ	800T-U64	800H-UR64

* Single turn operation with 312° rotation.

† Does not meet Class 1 Div. 2 applications.

‡ Rated for 300V AC/DC, 2 W maximum (6V DC minimum). Specify Bulletin 800TC or 800HC for finger-safe potentiometers. Example: **Cat. No. 800T-U29** becomes **Cat. No. 800TC-U29**.

§ For use with Type J potentiometers having a shaft length of 7/8 in. (22.2 mm) and a shaft diameter of 1/4 in. (6.3 mm).

Mechanically Interlocked Maintained Push Button Devices



Cat. No. 800T-FA22A



Cat. No. 800T-FB16A



Cat. No. 800T-FC16F



Cat. No. 800H-CRA22A

Contact Arrangement		Type 4/13			Type 4/4X/13	
		Button Position: Button Type/Color➤			Bootless♣	
Contact Type	Configuration/Position	Upper: Flush/Black Lower: Flush/Black Cat. No.	Upper: Flush/Green Lower: Extended/Red Cat. No.	Upper: Flush/Green Lower: Mushroom/Red Cat. No.	Upper: Flush/Green Lower: Extended/Red Cat. No.	Upper: Flush/Black Lower: Flush/Black Cat. No.
1 N.O. - 1 N.C.		800T-FA22A	800T-FB16A	800T-FC16A	800H-CRB16A	800H-CRA22A
2 N.O. - 2 N.C.		800T-FA22F	800T-FB16F	800T-FC16F	800H-CRB16F	800H-CRA22F
No Contact	—	800T-FA22	800T-FB16	800T-FC16	800H-CRB16	800H-CRA22

➤ Consult your local Rockwell Automation sales office or Allen-Bradley distributor for other operator types and combinations.

♣ If booted operators are desired, refer to page 10-39 to order boots separately.


Bulletin 800T/H

30.5 mm Push Buttons


Approximate Dimensions

Dimensions in inches (millimeters). Dimensions are not intended to be used for manufacturing purposes.

Push Buttons and Switches (Bul. 800T Only)

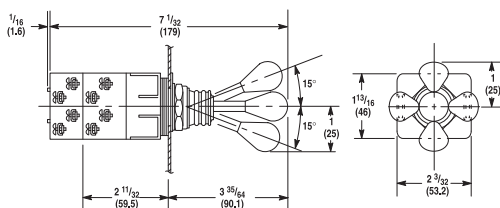


2-3-4 Way Switch
Shipping Wt. with 2 Contact Blocks 6 oz (0.17 kg)
Shipping Wt. with 4 Contact Blocks 8-1/2 oz (0.24 kg)




**Mechanically Interlocked
 Maintained Contact Push Button**
Shipping Wt. 1 lb (0.45 kg)


Push Buttons and Pilot Lights




**Flush and Extended
 Head Push Button**
Shipping Wt. 5-1/2 oz (0.15 kg)




Mushroom Head Push Button
Shipping Wt. 7-1/2 oz (0.21 kg)




**Non-Illuminated Knob Lever and
 Standard Knob Selector Switch**
Shipping Wt. 6 oz (0.17 kg)



**Illuminated Knob Lever and
 Standard Knob Selector Switch**
Shipping Wt. 6 oz (0.17 kg)




Wing Lever Selector Switch
Shipping Wt. 8 oz (0.22 kg)




Coin Slot Selector Switch
Shipping Wt. 6 oz (0.17 kg)

* Except jumbo which is 2-1/4 (57.2).


Operator Extension in Front of Panel (Bul. 800T Only)




Key Operated Selector Switch
Shipping Wt. 12 oz (0.34 kg)




Push Button with Cylinder Lock
Shipping Wt. 12 oz (0.34 kg)



Wobble Stick
Shipping Wt. 9 oz (0.25 kg)



Selector Push Button
Shipping Wt. 6 oz (0.17 kg)



Type J Potentiometer Unit
Shipping Wt. 4 oz (0.11 kg)

