




## Configuration Results

**Product:** 440G-T27178

**Description:** Guard Locking Switch - 440G  
 TLS-GD2: Solenoid Voltage:  
 110V AC/DC, Contacts(Safety  
 and Aux): 2 Normally Closed, 1  
 Normally Open, Actuator:  
 Standard, Conduit Entry: 1/2 in  
 NPT Adapter

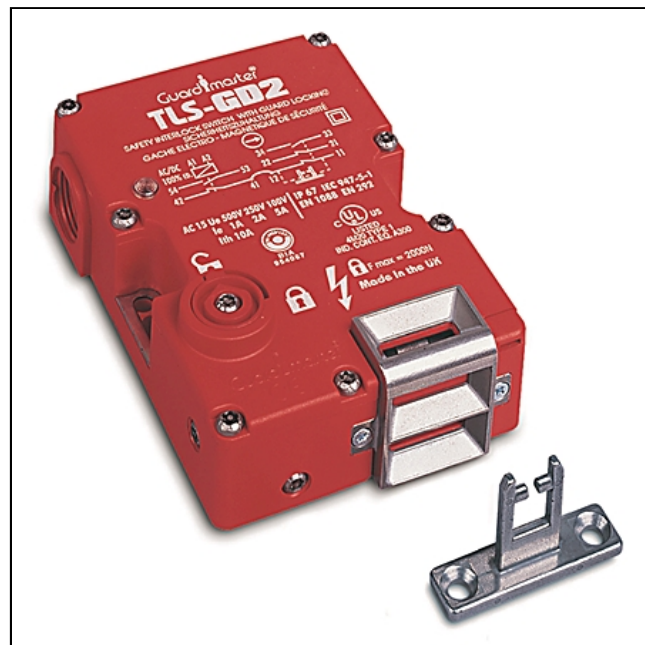

Representative Photo Only (actual product may vary based on configuration selections)

### Selected Components

### Selected Components

| Catalog Number | Qty | Product Description                                                                                                                                                                    | Supplementary Documents                                                                                                                                                              |
|----------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 440G-T27178    | 1   | Guard Locking Switch - 440G TLS-GD2: Solenoid Voltage: 110V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: Standard, Conduit Entry: 1/2 in NPT Adapter | <ul style="list-style-type: none"> <li>Product Details and Certifications</li> <li>Photo</li> <li>2-Dimensional Drawing (DWG/DXF)</li> <li>3-Dimensional STEP model (STP)</li> </ul> |

Contact your [Rockwell Automation Distributor or sales representative](#) for local pricing.

**Modify**

**Cancel**

**E Mail**