








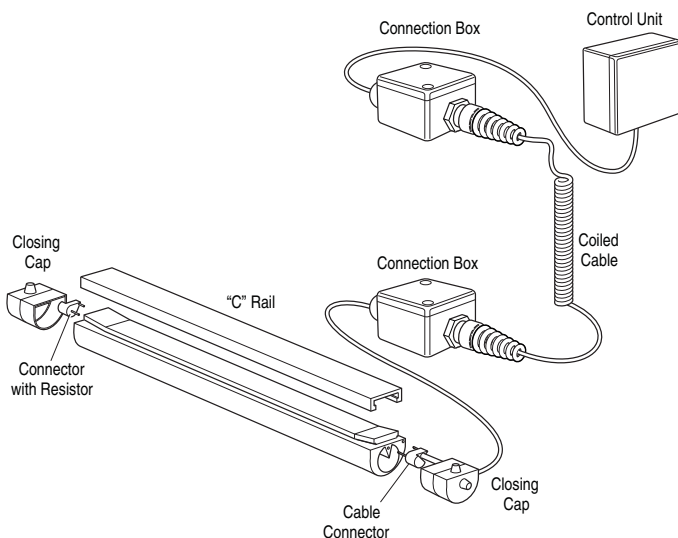


Description		Product Selection Criteria	Cat. No.
	60° Corner Connector	When using profile 440F-E0110N	440F-A0071N60 *
	30° Corner Connector	When using profile 440F-E0110N	440F-A24007130 *
	Connector and Cable	Use only on Mini Profile—1 m (3.3 ft)	440F-A1181
		Use only on Mini Profile—3 m (9.8 ft)	440F-A1183
		Use only on Mini Profile—5 m (16 ft)	440F-A1185
	Terminator	Use only on Mini Profile—8 kΩ (yellow) resistor for series termination	440F-A1186
	Closing Cap	Use only on Mini Profile—Closing Cap material: EPDM	440F-A1318
	Cyanocrylate Adhesive	Use Loctite 401 for dry applications. Use Loctite 380E for wet applications.	NA
	Shears	Use to cut profiles.	440F-A3084
	Connection Box	Polycarbonate housing 53 x 53 x 35 mm (2.09 x 2.09 x 1.38 in.) complete with two pole terminal and trumpet type screw on connector with strain and relief clamp. For use with coiled cable.	440F-A0116
	Coiled Connection Cable	2.5 m (8.2 ft) (extended) of flexible coiled cable. Shelf length is 889 mm (35 in.) long. OD of coil is 22 mm (0.86 in.) and OD of cable is 5 mm (0.20 in.).	440F-A2450
		3.5 m (11.5 ft) (extended) of flexible coiled cable. Shelf length is 1270 mm (50 in.) long. OD of coil is 22 mm (0.86 in.) and OD of cable is 5 mm (0.20 in.).	440F-A2700
	Two rubber strips	When using profile 440F-E0110N shelf length is 175 x 10 x 0.7 mm (6.89 x 0.39 x 0.03 in.).	440F-A0005

* Includes two rubber strips (440F-A0005) when using profile 440F-E0110N.



Example application of profile using coiled cable. The coiled cable can not be directly connected to the profile due to the weight of the cable. The proper use of the coiled cable is to connect the coiled cable to the profile through the connection box. The coiled cable should be secured to both the moving and stationary objects so as to prevent straining of the terminal connections.