
# Data sheet | Item number: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black www.wago.com/216-244



Picture differs from the item.

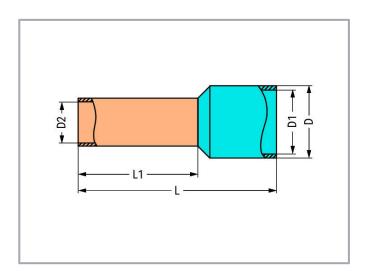

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

Color:

## Data sheet | Item number: 216-244

www.wago.com/216-244



#### Data

#### Technical data

Main product function	Ferrule
Sleeve cross-section (AWG)	16 AWG
Sleeve for	1.5 mm <sup>2</sup>

#### Connection data

Strip length 12 mm / 0.47 inch	
--------------------------------	--

# Physical data

Length	16 mm
Length 1	10 mm
Diameter	4 mm
Diameter 1	3.5 mm
Diameter 2	1.7 mm

#### Mechanical data

Suitable 200°	1 – 2002 Series
---------------	-----------------

## Material data

Color	black
Fire load	0.002 MJ
Weight	0.1 g

## Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 Stück
Packaging type	box
Country of origin	DE
GTIN	4044918016346
Customs tariff number	8536904000

Subject to changes. Please also observe the further product documentation!

**WAGO** Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

#### Data sheet | Item number: 216-244

www.wago.com/216-244



# Downloads Documentation

**Bid Text** 

216-244 X81 - Datei	Feb 19, 2019	xml 2.9 kB	Download
216-244 doc - Datei	Sep 11, 2017	doc 24.1 kB	Download

# **Environmental Product Compliance**

copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Compliance Search

Environmental Product Compliance 216-244 URL Download Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic

# Installation Notes

A perfect gas-tight crimp – both electrically and mechanically reliable

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$