


Extended Terminals

 Representative Photo	Description	Frame Size	3-Pole Cat. No. (Pkg. Qty. 3)	4-Pole Cat. No. (Pkg. Qty. 4)
	Extended Terminals for busbar or ring type connection - G- & I-frame supplied with 100 mm phase barrier - H- & J-frame supplied with insulator, 100 mm phase barrier, and terminal cover - K- & N-/NS-frame supplied with insulator and 100 mm phase barrier - M-frame terminals only	G	140G-G-EXT3	140G-G-EXT4
		H	140G-H-EXT3	140G-H-EXT4
		I	140G-I-EXT3	140G-I-EXT4
		J	140G-J-EXT3	140G-J-EXT4
		K	140G-K-EXT3	140G-K-EXT4
		M	140G-M-EXT3	140G-M-EXT4
		N, NS	140G-N-EXT3	140G-N-EXT4

Spreader Terminals

 Representative Photo	Description	Frame Size	3-Pole Cat. No. (Pkg. Qty. 3)	4-Pole Cat. No. (Pkg. Qty. 4)
	Spreader Terminals for busbar or ring type connection - G- & I-frame supplied with 200 mm phase barrier - H- & J-frame supplied with insulator, 100 mm phase barrier, and terminal cover - K- & N-/NS-frame supplied with insulator and 100 mm phase barrier - M- & R-frame terminals only	G	140G-G-EXS3	140G-G-EXS4
		H	140G-H-EXS3	140G-H-EXS4
		I	140G-I-EXS3	140G-I-EXS4
		J	140G-J-EXS3	140G-J-EXS4
		K	140G-K-EXS3	140G-K-EXS4
		M	—	140G-M-EXS4
		N, NS	—	140G-N-EXS4
	Top Spreader Terminals for busbar or ring type connection M-frame terminals only	R	140G-R-EXS3	140G-R-EXS4
		M	140G-M-EXSLI3	—
 Representative Photo	Bottom Spreader Terminals for busbar or ring type connection N-/NS-frame supplied with insulator and 100 mm phase barrier	N, NS	140G-N-EXSLI3	—
		M	140G-M-EXSLO3	—
		N, NS	140G-N-EXSLO3	—

Rear Terminals


 Representative Photo	Description	Frame Size	3-Pole Cat. No. (Pkg. Qty. 3)	4-Pole Cat. No. (Pkg. Qty. 4)
	Rear flat horizontal terminals	N, NS	140G-N-TLH3	140G-N-TLH4
		N, NS	140G-N-TLV3	140G-N-TLV4
	Rear flat vertical terminals	R ★	140G-R-TLV3	140G-R-TLV4

★ 2000 A and 2500 A MCCBs only.

Molded Case Circuit Breakers

Approximate Dimensions — 250 A, J-Frame

Cat. Nos. 140G-J-EXT3, -EXT4 Extended Terminals

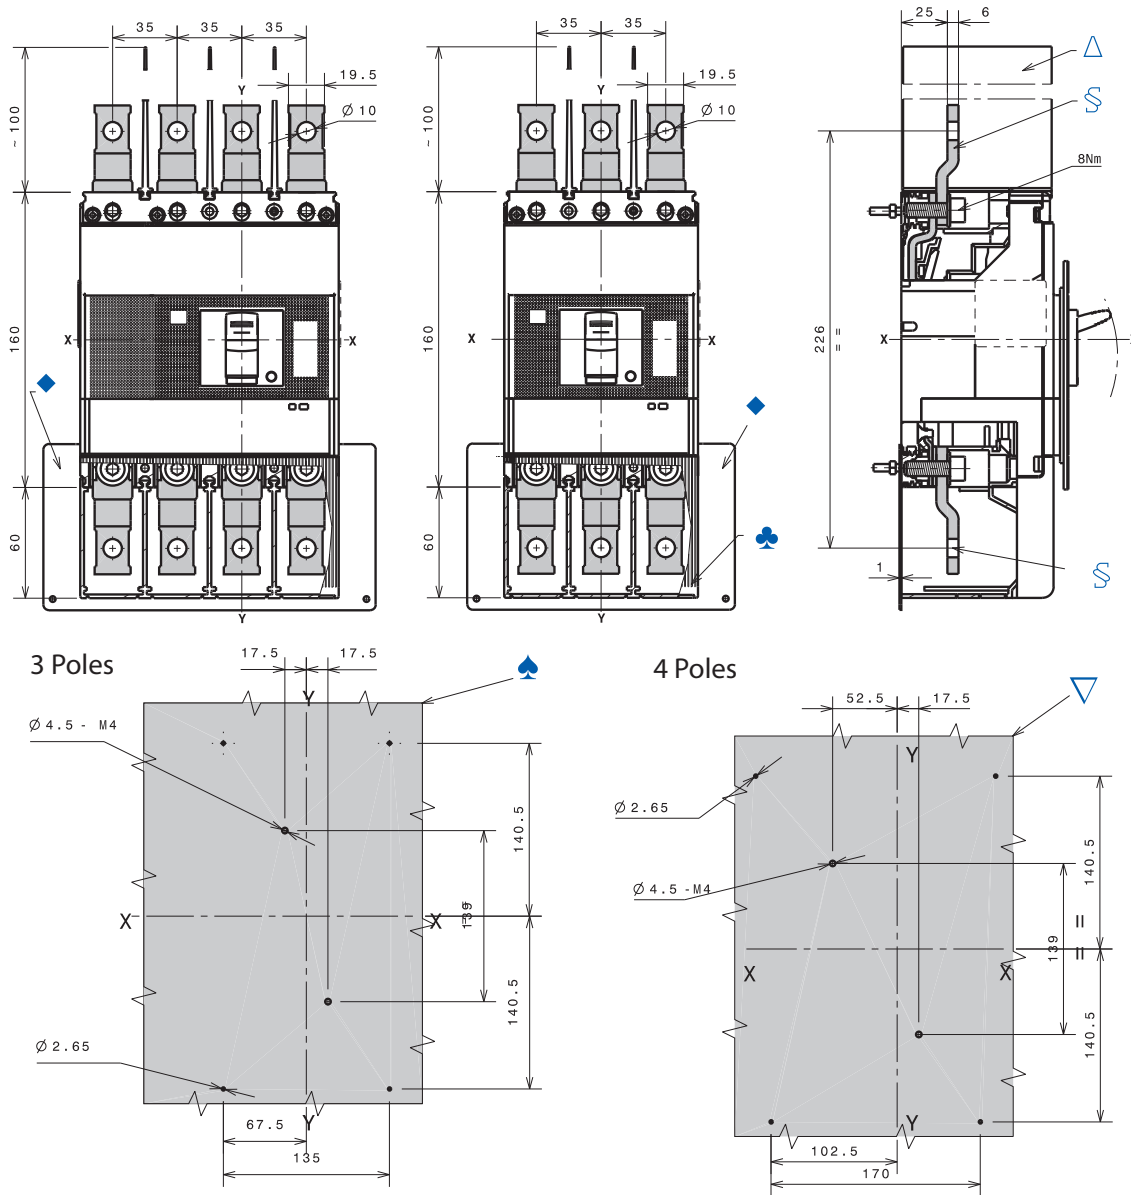

§ Extended terminals

♣ Optional terminal covers with IP40 protection provided

△ Required 100 mm insulating phase barriers provided

◆ Required insulating plate provided for molded case circuit breaker with $U_0 > 440V$

♠ Drilling template for 3-pole molded case circuit breaker

▽ Drilling template for 4-pole molded case circuit breaker