



Pendant Stations

(Cat 800FC-__ _)



WARNING


To prevent electrical shock, disconnect from power source before installing or servicing.




Type 4, 4X, 13, IP66

Environmental ratings are maintained when Recognized or Listed components with same ratings are used.



Use UL Listed type S or SJ cords, with a smooth outer jacket rated for wet locations use (marked W) and oil resistant outer covering (marked O) such as SOW or SJOW with copper wire, rated 75 deg C min, 18-12 AWG, overall OD of 7.5 to 15 mm for the small cable sleeve (800FC-AS3) and 9 to 20 mm for the large cable sleeve (800FC-AS5).

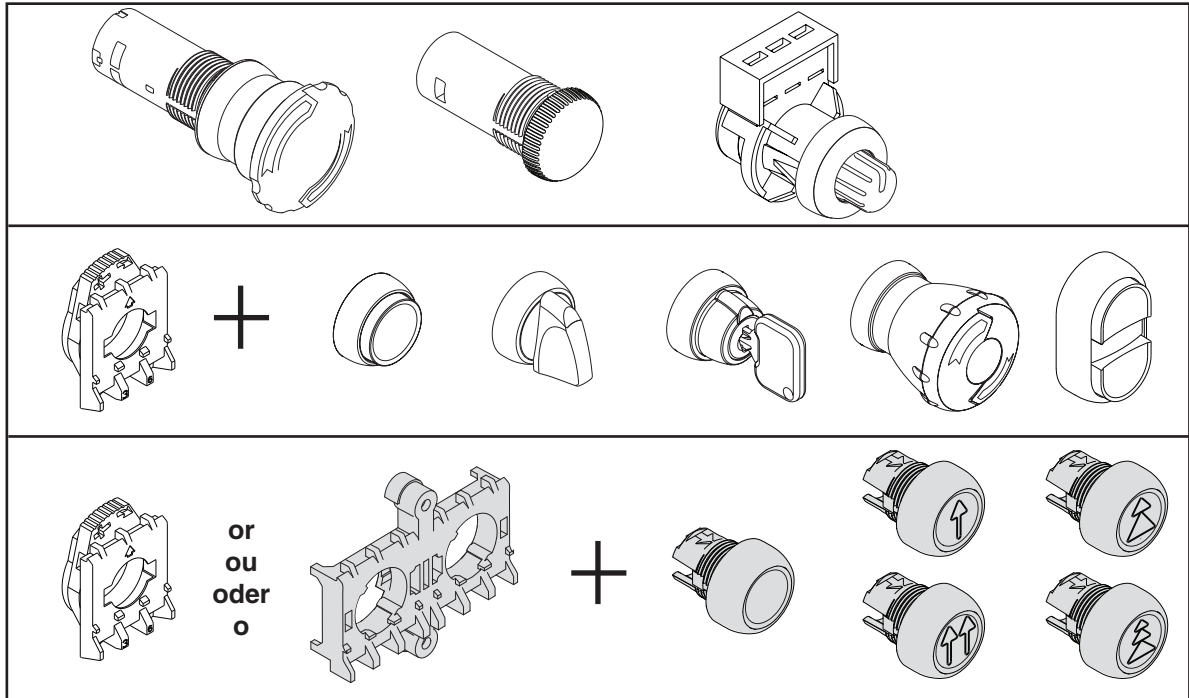

1

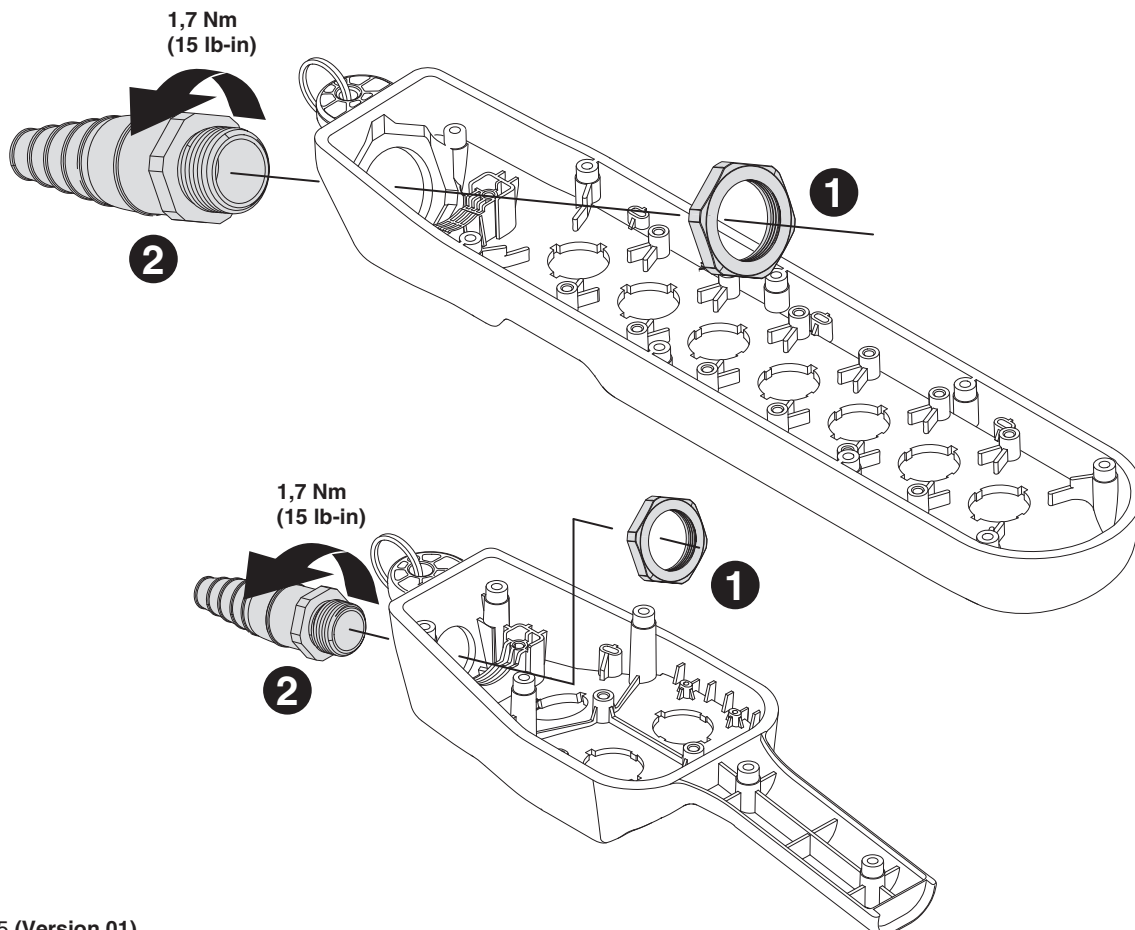

2

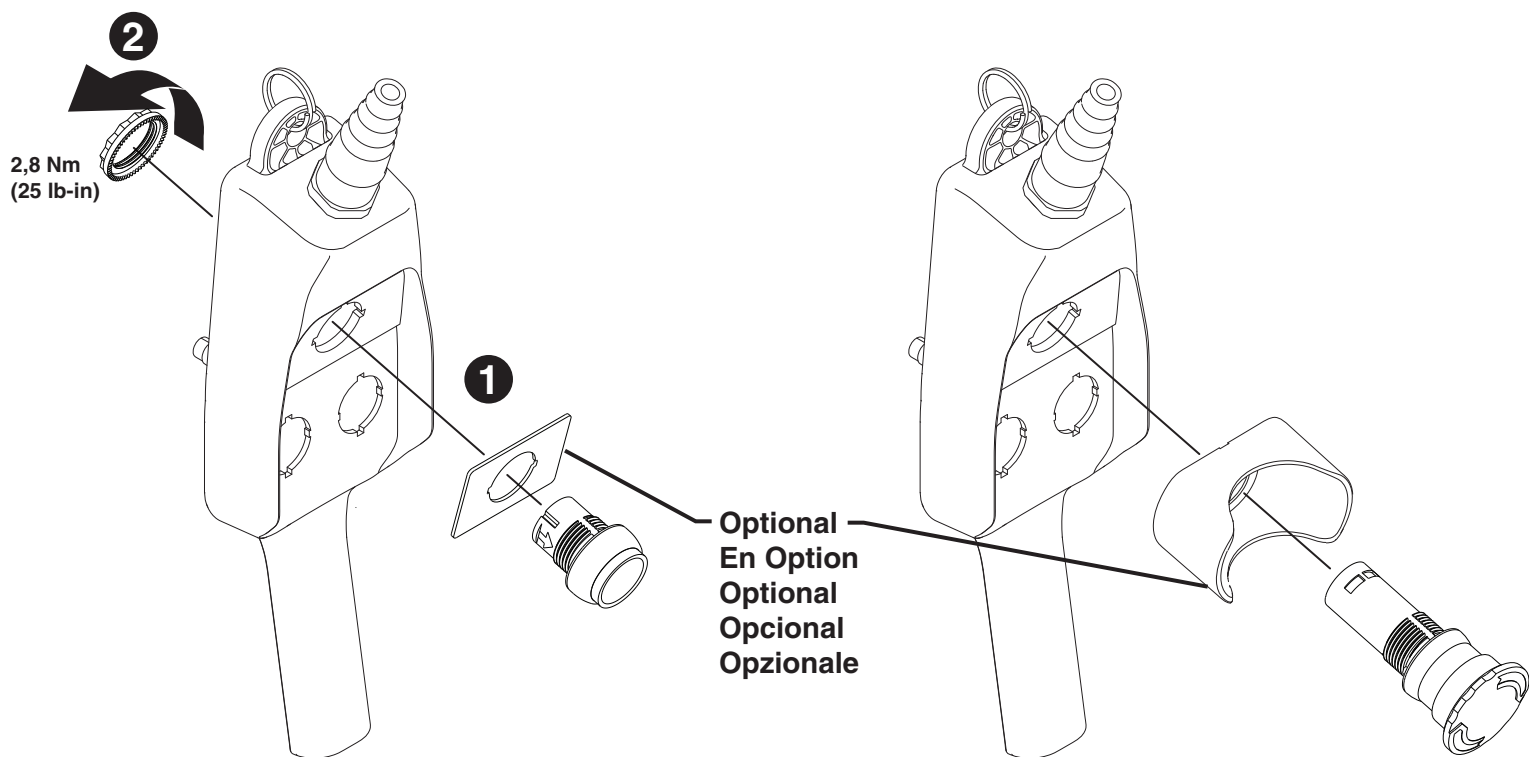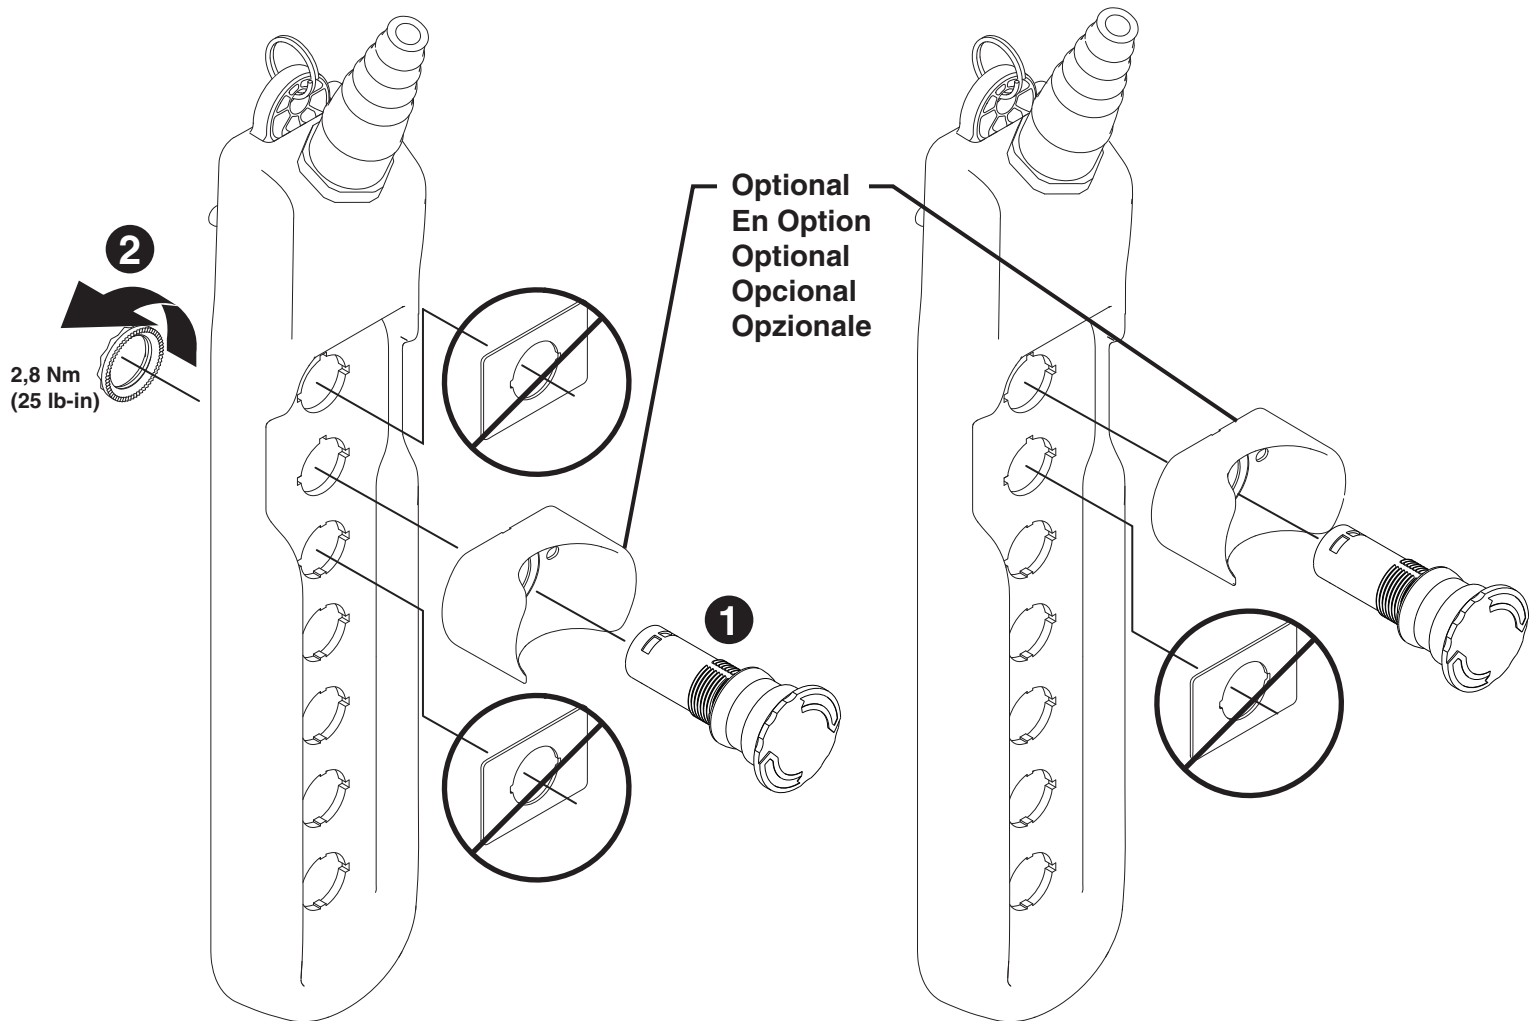

3

2,8 Nm
(25 lb-in)

2

1

3


3

2


2,8 Nm
(25 lb-in)

1



4

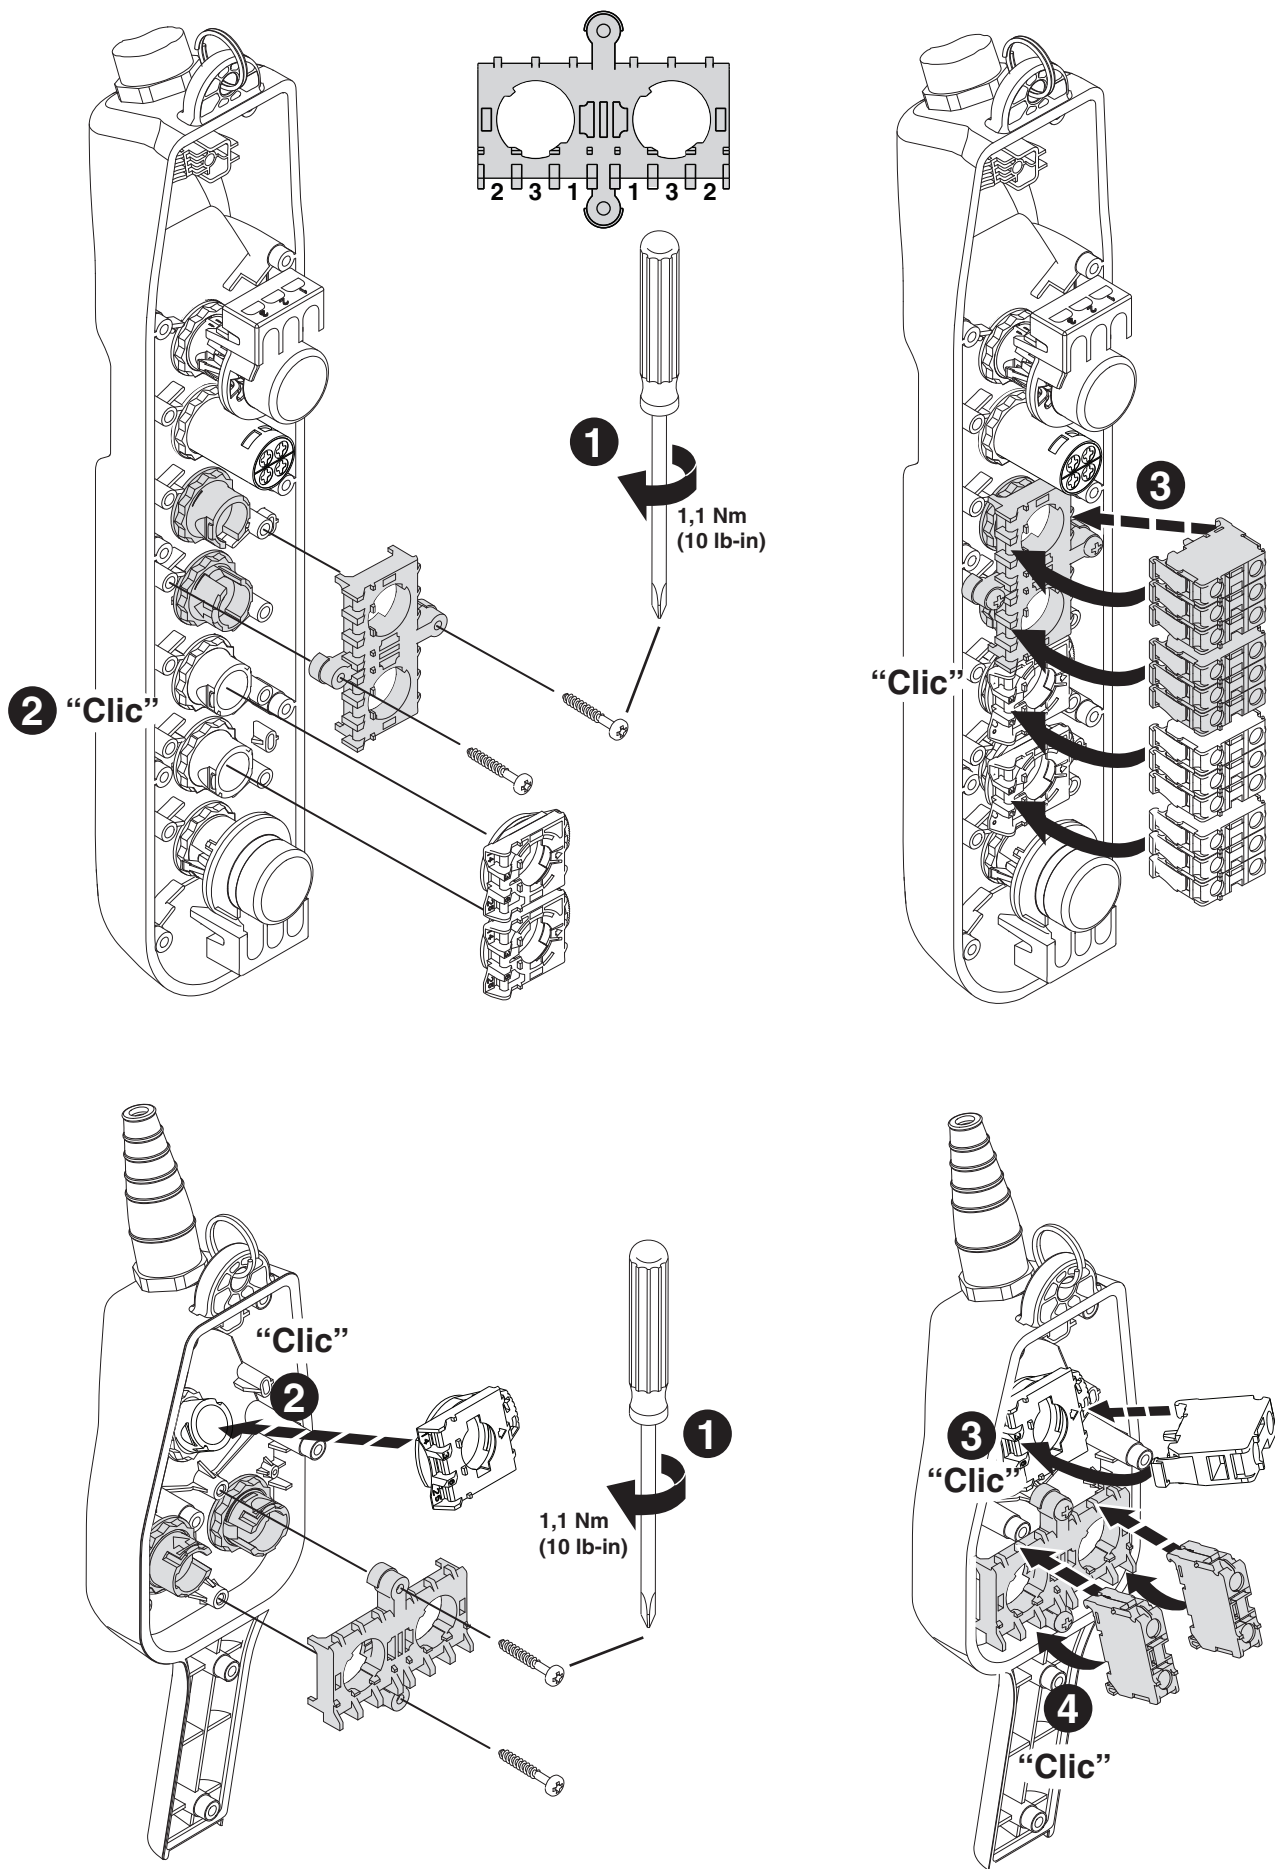

5

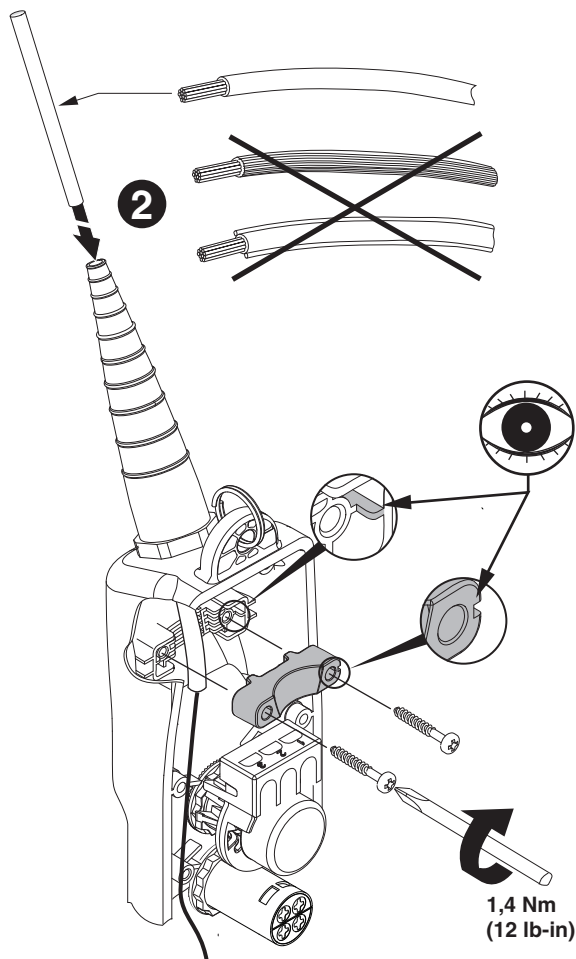


2

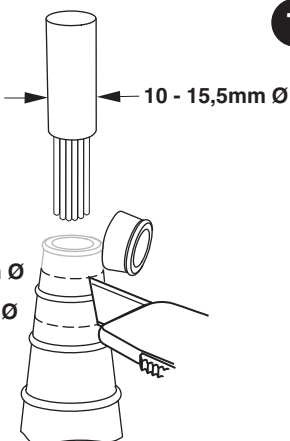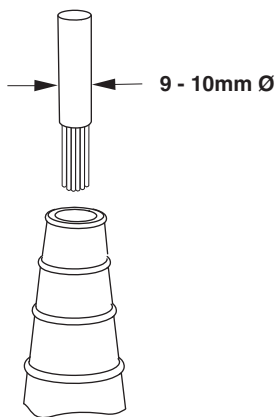


> 10mm Ø
> 14mm Ø

3





1


or
ou
oder
o

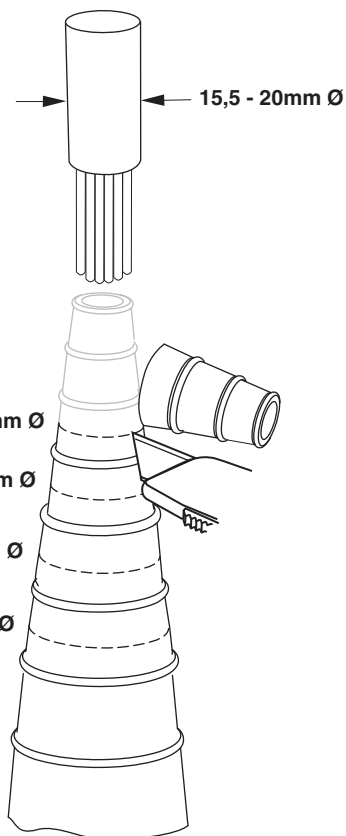

> 15,5mm Ø
> 17mm Ø
> 18mm Ø
19 - 20mm Ø

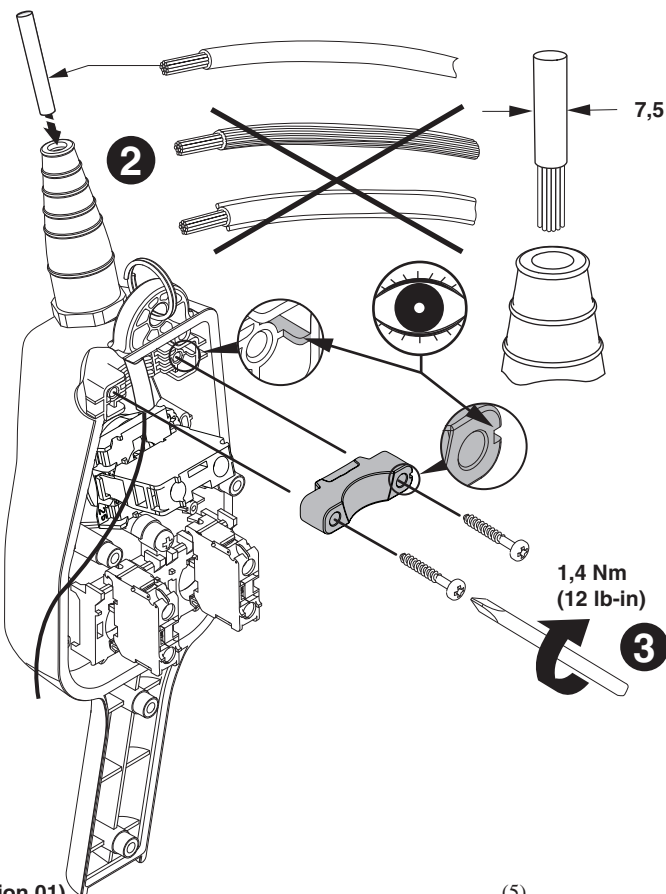


2



1

> 9mm Ø
> 12mm Ø
14 - 15mm Ø

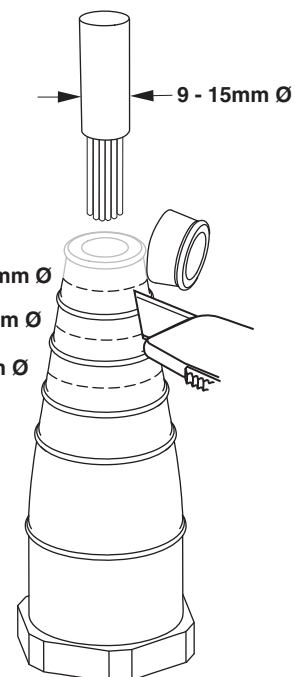

6







Side Jumpers

Connexions Latérales


Seitliche Querverbindungen

Connessioni laterali

Puentes laterales

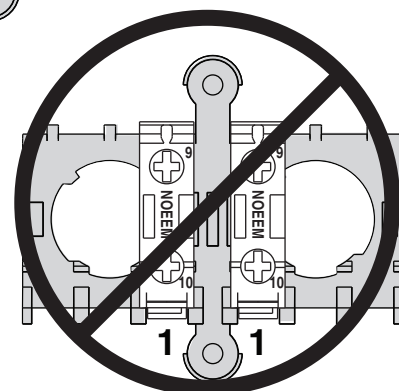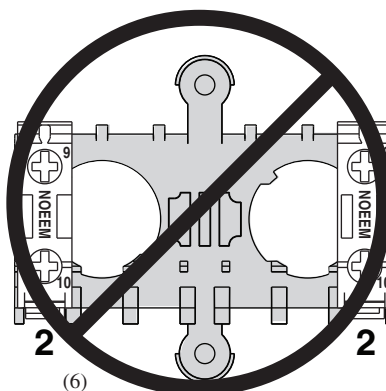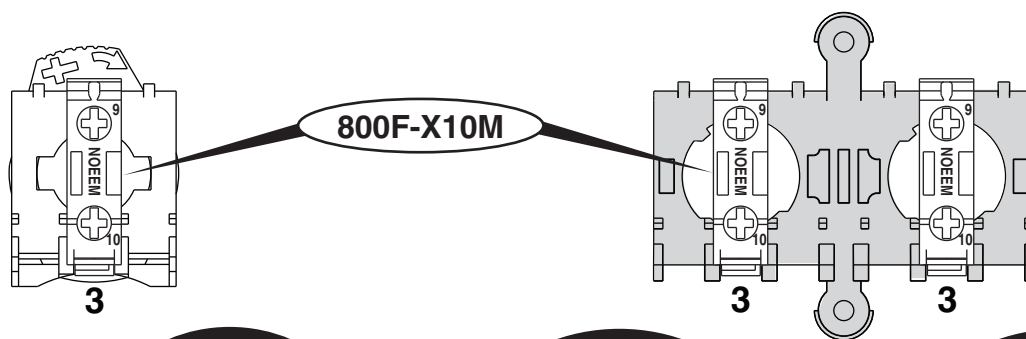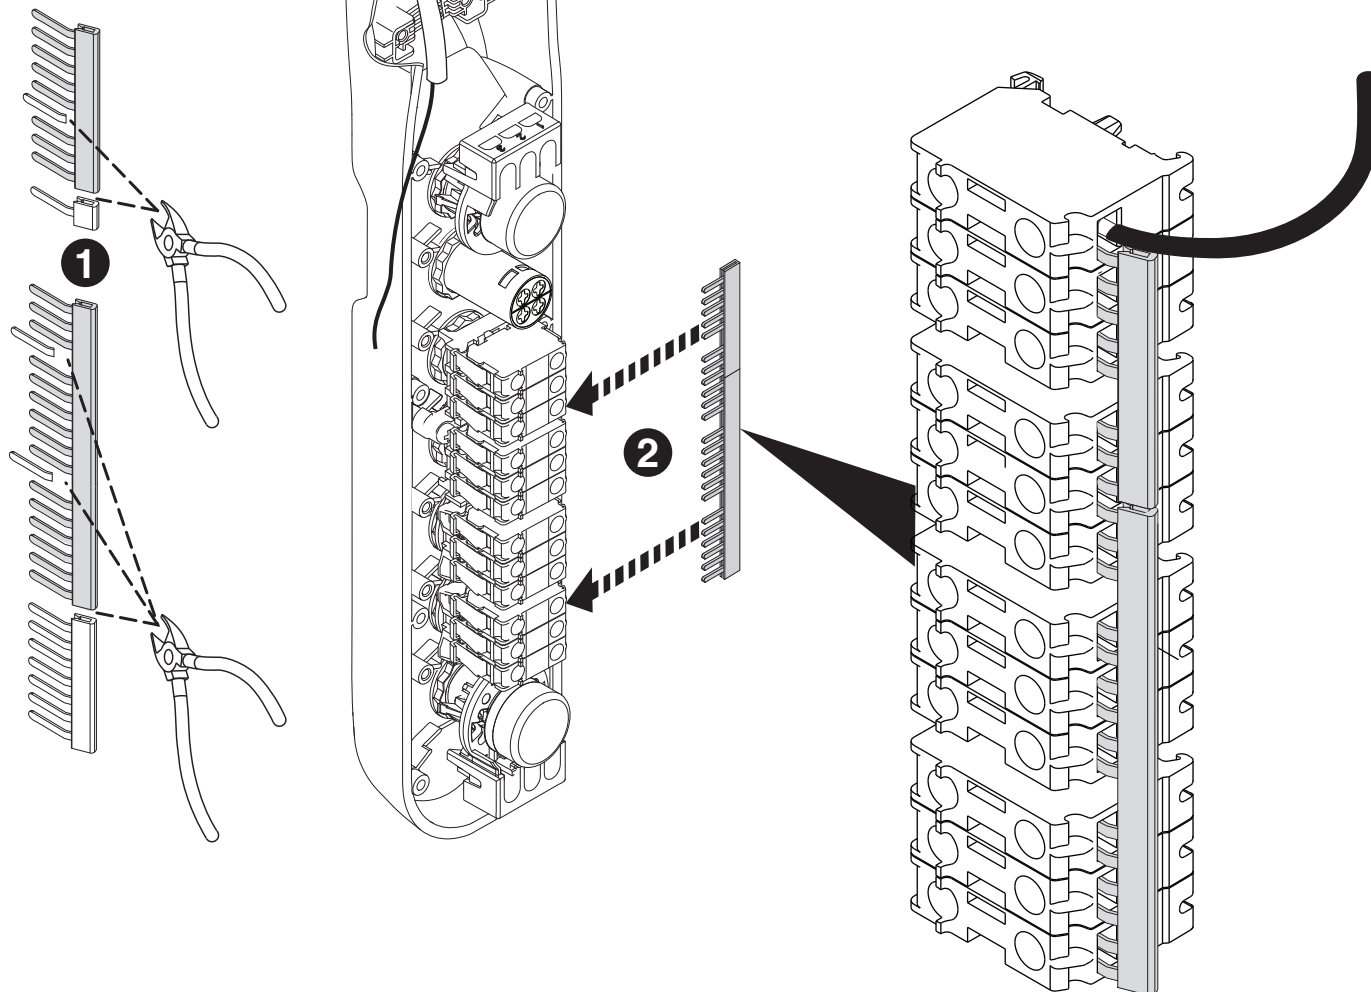

Typical Wiring
Câblage type
Typische Verdrahtung
Cablaggio Tipico
Instalación típica

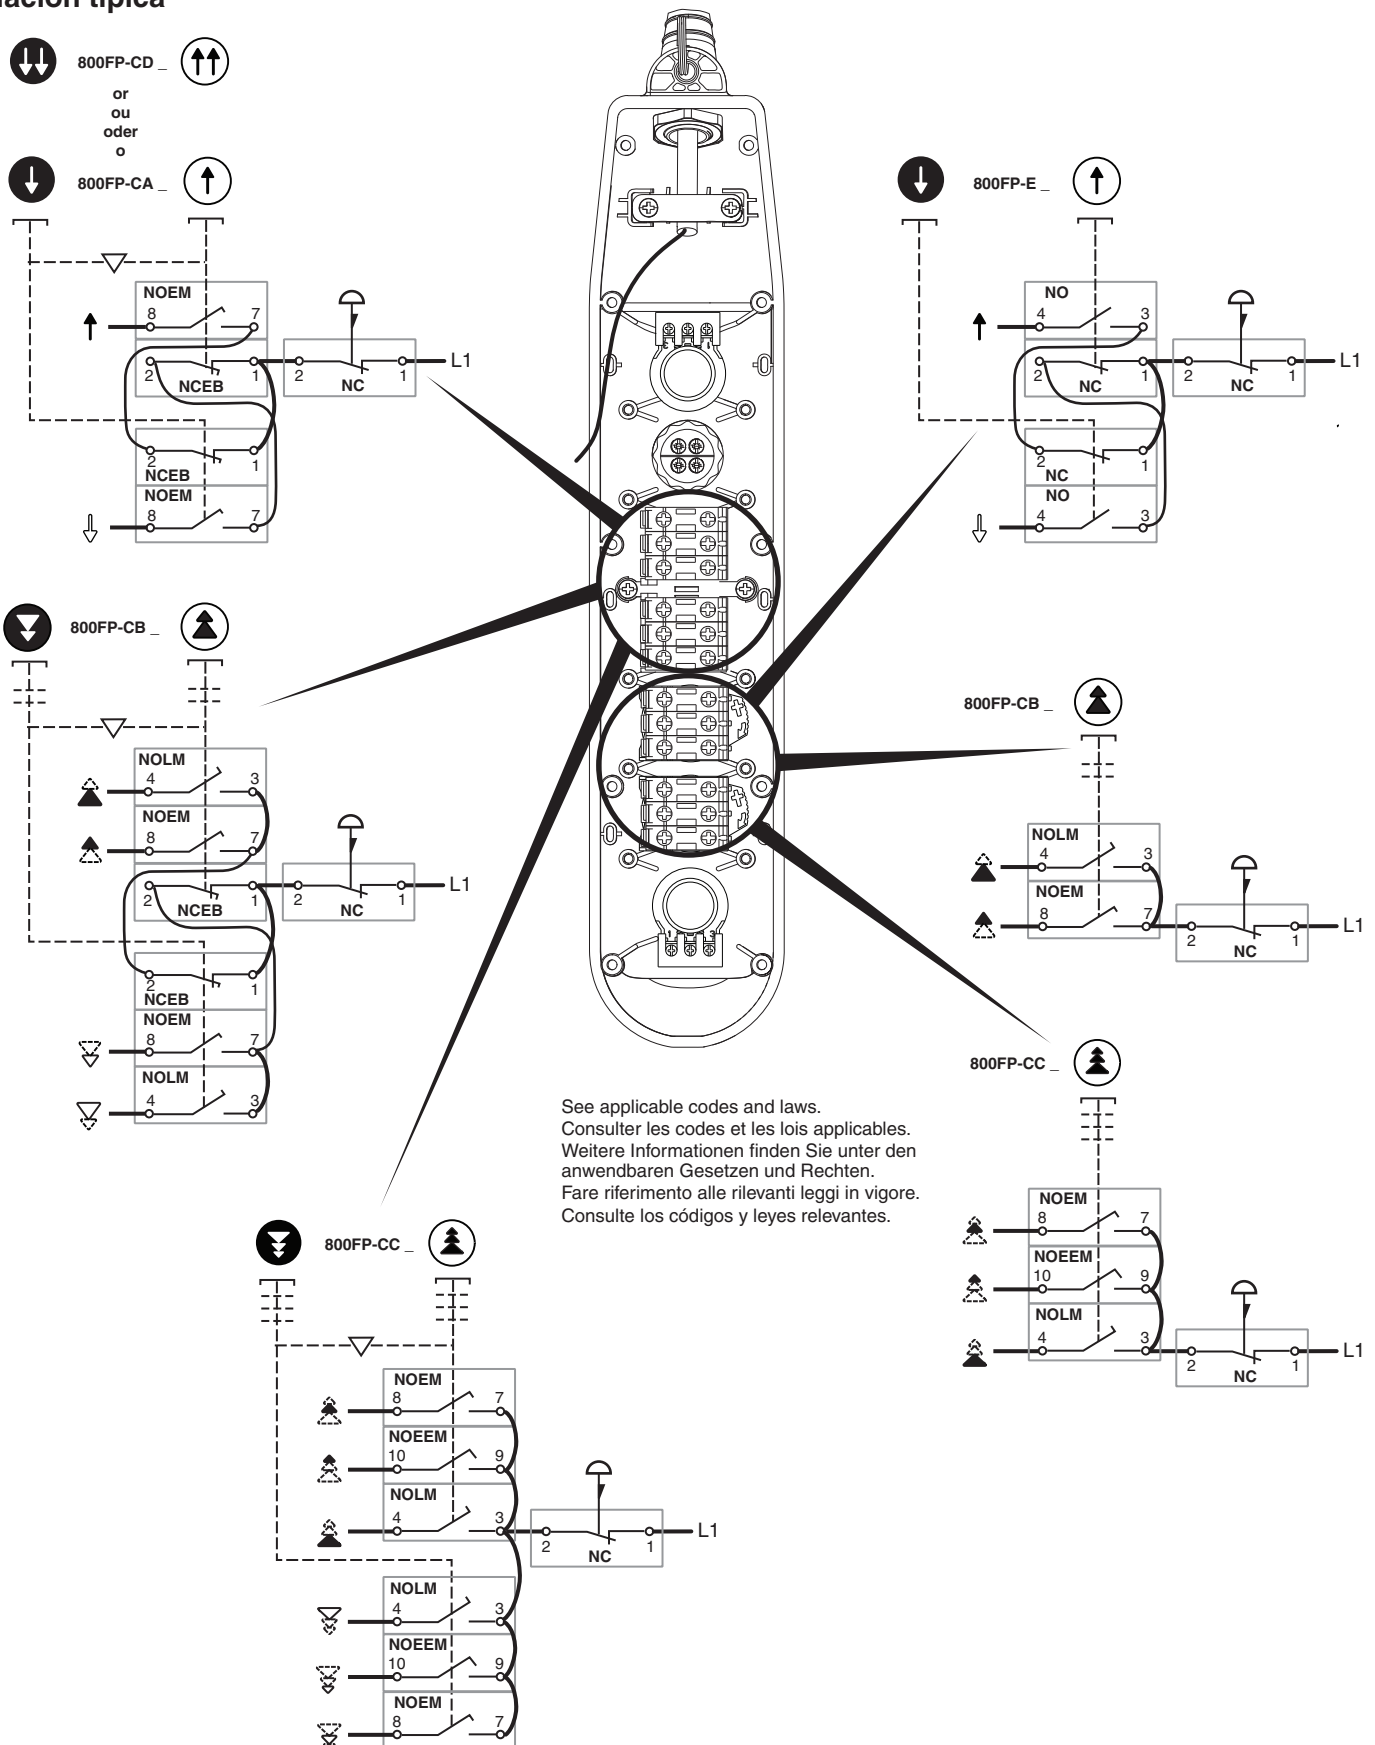

7

