




Male Housing

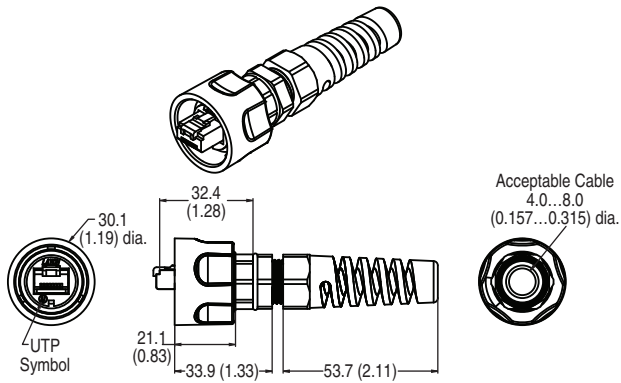

Female Receptacle

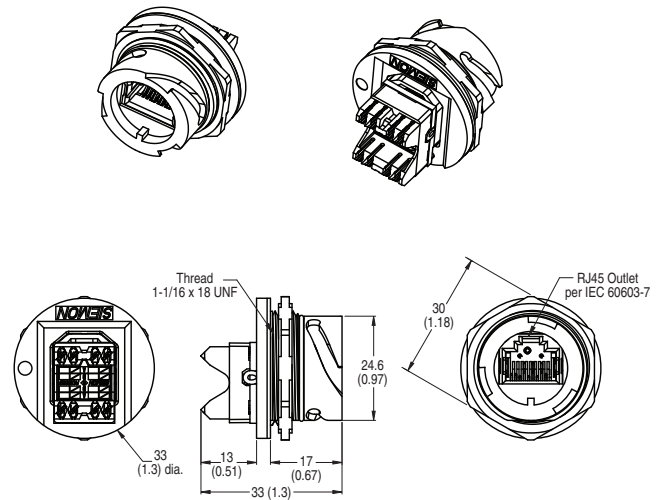

Female to Female Coupler

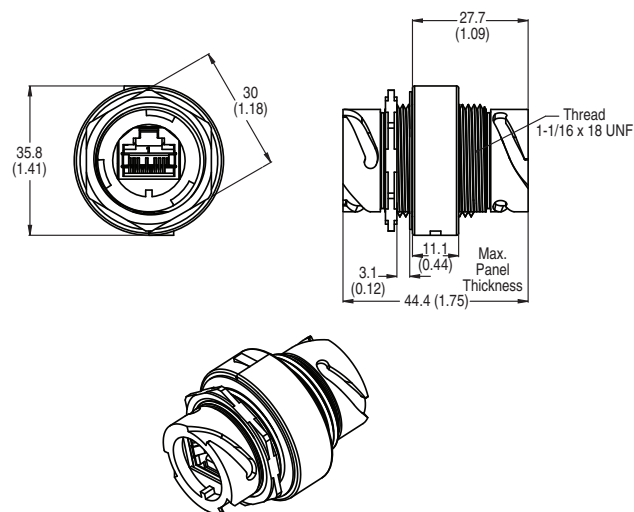

Product Selection

Field Attachables — Thermoplastic

Description	Cat. No.
Variant 1 housing—male	1585BP-M8CC
Variant 1 receptacle—female	1585BP-F8CC
Female RJ45 to female RJ45 coupler	1585BP-F8BF
Male protective cap	1585BP-MCAP
Female protective cap	1585BP-FCAP

Overmolded Patchcord — Thermoplastic



Description	Cable Style	Operating Temperature [C (F)]	Cat. No.*
Variant 1 male to variant 1 male	Unshielded twisted pair, TPE high-flex, 8 conductor	-25...+75 ° (-13...+167 °)	1585BT-M8TBMM-2
	Foil and braided shield, PUR, 8 conductor, high-flex, halogen-free	-40...+75 ° (-40...+167 °)	1585BT-M8UBBM-2

* Replace -2 (2 m) with 5 (5 m) or 10 (10 m) for additional standard cable lengths.