



Tie-Point Block
 (Cat. No. 1492-JD3C)

Incorporates a shunt bar between the upper and lower current bars to provide a common point among all four terminals.




Surge Suppression Block (Cat. No. 1492-JD3SS)

Provides a convenient means of incorporating transient suppression for relays, contactors, and solenoids into a control system.

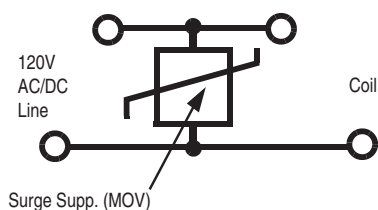


Diode Block
 (Cat. Nos. 1492-JD3DF, 1492-JD3DR)

Uses a 1N4007 diode between the upper and lower levels for insertion into a control circuit. This block is useful in low voltage DC control circuits for directioning and suppression.

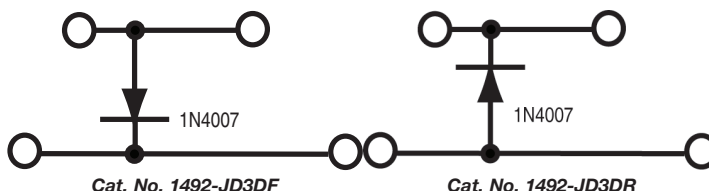

Resistor Block
 (Cat. No. 1492-JD3RB, -JD3RC001)

Permits the introduction of a 10 Ω...4.75 MΩ resistor into a control circuit.

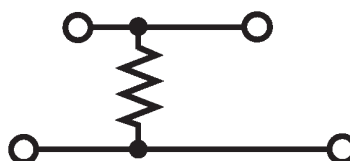

- **Return Blocks** that have both terminations on the same side of the terminal block allowing the rail to be mounted next to the wall of an enclosure
- **Plug-In Style Blocks** that allow the insertion of removable plugs into control circuits. Available plugs include a Disconnect Plug, a Fuse Plug, and a Component Plug which will accommodate various electrical components.
- **Thermocouple Terminal Blocks** (Types B, E, J, K, N, S, T) for temperature control applications
- A wide variety of **Snap-In Markers** for individual or group circuit identification
- Multi-pole insulated **Center Jumpers** which provide a convenient method of commoning control circuits




Materials and Design Features

The Bulletin 1492-J line is designed for safety, installation ease, and ruggedness. Features using these design criteria include the following:

- Tin-plated terminals and steel screws for corrosion resistance (Bulletin 1492-W terminal blocks have nickel-plated terminals and stainless steel screws)
- High copper content copper alloy for excellent conductivity
- Four-sided wire funnel guides for easy wire insertion
- Finger-safe housings to prevent accidental contact with live circuits
- International approvals for worldwide use
- DIN Rail (Cat. No. 199-DR1) mountability, allowing terminal blocks to be placed on the same channel as contactors, starters, relays, and other DIN Rail-mounted control devices
- Self-extinguishing, polyamide 6.6 housing material with UL 94-V0 flammability rating (Bulletin 1492-W terminal blocks have UL 94-V2 flammability rating)
- Backed out screws for fast wiring

Screw Connection Terminal Blocks

Specialty Feed-Through Blocks

	1492-J4Q				1492-JD3C				1492-JD4C			
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.												
Specifications	Single-level feed-through terminal block with 2 connection points on each side				Two-level feed-through terminal block with commoning bar				Two-level feed-through terminal block with commoning bar			
Certifications		CSA	IEC			CSA	IEC	ATEX		CSA	IEC	ATEX
Voltage Rating	600V AC/DC			500V AC/DC	600V AC/DC	300V AC/DC	400V AC/DC	275V AC/DC	600V AC/DC	300V AC/DC	400V AC/DC	550V AC/DC
Maximum Current	30 A			32 A	20 A	10 A	24 A	21 A	35 A	30 A	32 A	28 A
Wire Range (Rated Cross Section)	#30...10 AWG			0.5...4 mm ²	#22...12 AWG	#26...12 AWG	2.5 mm ²	2.5 mm ² (20...14 AWG)	#26...10 AWG		0.5...4 mm ²	4 mm ² (20...12 AWG)
Wire Strip Length	0.39 in. (10 mm)				0.39 in. (10 mm)				0.28 in. (7 mm)			
Recommended Tightening Torque	6.2 lb•in (0.7 N•m)				4.5...7.1 lb•in (0.5...0.8 N•m)				4.5 lb•in (0.5 N•m)			
Density	49 pcs/ft (163 pcs/m)				59 pcs/ft (196 pcs/m)				49 pcs/ft (163 pcs/m)			
Housing Temperature Range	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)			
Short-Circuit Current Rating (SCCR)	See page 12-42											
Terminal Blocks	Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.	
Color: Grey	1492-J4Q		50		1492-JD3C		100		1492-JD4C		100	
Accessories	Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.	
Mounting Rails:												
1 m Symmetrical DIN (Steel)	199-DR1		10		199-DR1		10		199-DR1		10	
1 m Symmetrical DIN (Aluminum)	1492-DR5		10		1492-DR5		10		1492-DR5		10	
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6		2		1492-DR6		2		1492-DR6		2	
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7		2		1492-DR7		2		1492-DR7		2	
End Barriers												
Grey	1492-EBJ4Q		50		1492-EBJD3		20		1492-EBJD4		20	
Blue	—		—		1492-EBJD3-B		20		—		—	
Yellow	1492-EBJ4Q-Y		50		1492-EBJD3-Y		20		—		—	
End Anchors and Retainers:												
Screwless End Retainer	1492-ERL35		20		1492-ERL35		20		—		—	
DIN Rail — Normal Duty	1492-EAJ35		100		1492-EAJ35		100		—		—	
DIN Rail — Heavy Duty	1492-EAHJ35		50		1492-EAHJ35		50		1492-EAHJ35		50	
Jumpers:*												
Screw Center Jumper — 41-pole	—		—		—		—		—		—	
Screw Center Jumper — 10-pole	—		—		1492-CJJ5-10		20		—		—	
Screw Center Jumper — 4-pole	—		—		1492-CJJ5-4		50		—		—	
Screw Center Jumper — 3-pole	—		—		1492-CJJ5-3		50		—		—	
Screw Center Jumper — 2-pole	—		—		1492-CJJ5-2		50		—		—	
Plug-in Center Jumper — 41-Pole	1492-CJLJ6-41		10		—		—		1492-CJLJ6-41		10	
Plug-in Center Jumper — 5-, 6-, 7-, 8-, 9-, 10-Pole	1492-CJLJ6-10		20		—		—		1492-CJLJ6-10		20	
Plug-in Center Jumper — 2-, 3-, 4-Pole	1492-CJLJ6-2, -3, -4		60		—		—		1492-CJLJ6-2, -3, -4		60	
Insulated Side Jumper — 24-Pole	—		—		1492-SJ5A-24		50		—		—	
Insulated Side Jumper — 10-Pole	—		—		1492-SJ5A-10		50		—		—	
Screw Type Jumper Notching Tool	—		—		1492-T1		1		—		—	
Other Accessories:												
Partition Plate	—		—		1492-PPJD3		20		1492-PPJD3		20	
Test Plug Socket	—		—		1492-TPS23		20		—		—	
Test Plug	—		—		1492-TP23		20		—		—	
Test Plug (Stackable)	—		—		—		—		—		—	
Marking Systems:	1492-MR6X12 (120/card)		5		1492-M5X8 (144/card)		5		1492-MR6X8 (120/card)		5	
Snap-in marker card	1492-M6X12 (120/card)		5		1492-M5X5 (200/card)		5		1492-M6X5 (200/card)		5	

* Use of center jumpers may affect spacings, requiring derating of terminal blocks; see page 12-83 for details.

Screw Connection Terminal Blocks

Short-Circuit Current Ratings

Fuse Ratings

Cat. No.	Wire Range Cu [AWG]		Overcurrent Protection Fuse Required Class/Max. Current Rating [A]						Maximum Voltage [V]	SCCR, RMS SYM [A]
	Line	Load	J	T	RK1	RK5	G	CC		
1492-J3	14...12	14...12	30	30	—	—	30	30	600	100,000
1492-J3P										
1492-JD3SS										
1492-JD3										
1492-JD3C										
1492-JG3TW										
1492-JDG3C										
1492-JG3										
1492-J3F	14...12	14...12	30	30	—	—	30	30	300	100,000
1492-J3TW										
1492-JC3										
1492-JDC3										
1492-JKD3										
1492-JD3FB										
1492-JD3F										
1492-JDG3FB										
1492-JD3PSSTP										
1492-JD3PTP										
1492-JDG3P										
1492-JDG3PSS										
1492-JDG3PSSTP										
1492-JDG3PTP										
1492-JDG3										
1492-JD3PSS										
1492-JD3P										
1492-J4	14...10	14...10	60	60	30	—	60	30	600	100,000
1492-JG4										
1492-JKD4										
1492-J4TW										
1492-J4Q										
1492-JG4TW										
1492-JG4Q										
1492-JKD4TW										
1492-JKD4Q										
1492-JKD4TP										
1492-JD4C										
1492-JD4										
1492-JKD4QTP										
1492-JKD4TWTP										
1492-JSD4	14...10	14...10	60	60	30	—	60	30	300	100,000
1492-JKD4										
1492-J4CTB										
1492-J6	14...8	14...8	100	100	60	30	60	30	600	100,000
1492-JG6										
1492-J10	14...6	14...6	100	100	60	30	60	30	600	100,000
1492-JG10										
1492-J16	14...4	14...4	100	100	60	30	60	30	600	100,000
1492-JG16										
1492-J16ND										
1492-J35	12...1/0	12...1/0	200	200	100	30	60	30	600	100,000
1492-JG35										
1492-J50	6...1/0	6...1/0	200	200	100	30	60	30	600	100,000
1492-JG50										
1492-J70	1/0...3/0	1/0...3/0	400	400	200	100	60	30	600	100,000
1492-JG70										
1492-J120	4...4/0	4...4/0	400	400	200	100	60	30	600	100,000
1492-JG120										

Screw Connection Terminal Blocks

Short-Circuit Current Ratings — Overcurrent Ratings

Overcurrent Ratings

Cat. No.	Wire Range Cu [AWG] (Line and Load)	Overcurrent Protection Device Required	Max. Current [A]	SCCR, RMS Sym A 480Y/277V	SCCR, RMS Sym. A 600Y/347V
1492-J3	14...12	140M-D8E-__	16	65,000	30,000
1492-JG3TW		140M-C2E-B10		65,000	30,000
1492-J3P		140M-C2E-B16		65,000	30,000
1492-J3		140M-C2E-B25		65,000	30,000
1492-JD3		140M-C2E-B40		65,000	25,000
1492-JD3C		140M-C2E-B63		65,000	*
1492-JD3SS		140M-C2E-A__		65,000	30,000
1492-JDG3C		140M-C2E-C10		65,000	*
1492-JG3		140MC2E-C16		30,000	*
1492-J4		140M-F8E-__		65,000	30,000
1492-JG4	14...10	140M-D8E-C10	32	65,000	30,000
1492-J4TW		140M-D8E-C16		65,000	30,000
1492-J4Q		140M-D8E-C20		65,000	*
1492-JG4TW		140M-D8E-C25		30,000	*
1492-JG4Q		140M-D8E-B__		65,000	30,000
1492-JKD4TW		140M-C2E-B10		65,000	30,000
1492-JKD4Q		140M-C2E-B16		65,000	30,000
1492-JKD4TP		140M-C2E-B25		65,000	30,000
1492-JD4C		140M-C2E-B40		65,000	25,000
1492-JD4		140M-C2E-B63		65,000	*
1492-JKD4QTP		140M-C2E-C10		65,000	*
1492-JKD4TWTP		140M-C2E-C16		30,000	*
		140M-C2E-A__		65,000	30,000
1492-J6		140M-F8E-__		65,000	30,000
1492-JG6		140M-D8E-C10		65,000	30,000
	14...8	140M-D8E-C16	32	65,000	30,000
		140M-D8E-C20		65,000	*
		140M-D8E-C25		30,000	*
		140M-D8E-B__		65,000	30,000
		140M-C2E-B10		65,000	30,000
		140M-C2E-B16		65,000	30,000
		140M-C2E-B25		65,000	30,000
		140M-C2E-B40		65,000	25,000
		140M-C2E-B63		65,000	*
		140M-C2E-C10		65,000	*
		140M-C2E-C16		30,000	*
		140M-C2E-A__		65,000	30,000

* Bulletin 140M does not have ratings at this voltage.


IEC Terminal Block Accessories

Partition and Separation Plates

Partition Plates and Separation Plates

Partition plates allow visual and electrical separation of terminal groups and provide the necessary electrical spacing between adjacent insulated jumpers or between exposed ends of cut jumpers.

Separation plates consist of flexible thermoplastic material and are used between terminal blocks to isolate adjacent center jumpers both visually and electrically.

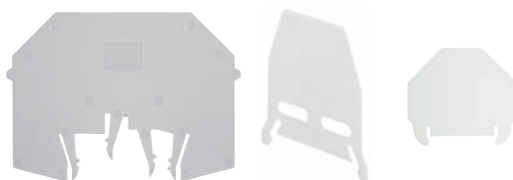

Dimensions Width x Length x Height	For Use With	Color	Pkg Qty.	Cat. No.
Partition Plates				
0.118 x 3.15 x 2.48 in. (3 x 80 x 63 mm)	1492-JD3, JD3C, JD3F, JD3DF, JD3DR, JD3RC..., JD3SS	Grey	20	1492-PPJD3
0.005 x 3.54 x 2.51 in. (0.13 x 90.1 x 63.8 mm)	1492-JD3P..., JDG3P...	Beige	20	1492-PPJD3P
0.08 x 1.57 x 1.20 in. (2 x 40 x 30.5 mm)	1492-WM3, WM4, WMG3, WMG4	Grey	50	1492-PPM3
0.014 x 2.28 x 1.51 in. (0.35 x 58 x 38.3 mm)	1492-WMD1	Grey	50	1492-PPMD1
0.06 x 1.85 x 1.57 in. (1.5 x 47 x 40 mm)	1492-W3, W4, WG4	Grey	50	1492-PP3
0.06 x 2.17 x 1.81 in. (1.5 x 55 x 46 mm)	1492-W6, W10, W16S, W4TW, WG6, WG10S, WG16S	Grey	50	1492-PP10
0.014 x 2.88 x 1.85 in. (0.35 x 73.2 x 47.1 mm)	1492-WTF3..., WTS3...	Beige	50	1492-PPTS3
0.06 x 1.93 x 2.36 in. (1.5 x 49 x 60 mm)	1492-J3, J4, J6, J10, J2Q, J3TW, J3F, JG2Q, JG3, JG3TW, JKD3, JKD3TP, J3P, J3PTP, JTC3	Grey	20	1492-EBJ16
		Blue	20	1492-EBJ16-B
		Yellow	20	1492-EBJ16-Y
Separation Plates				
.014 x 1.76 x 1.57 in. (0.35 x 44.8 x 40.0 mm)	1492-W3, W4	Beige	50	1492-SP3
	All 1492-FPK2 Fuse Plugs	Beige	50	1492-SPJ3

IEC Terminal Block Accessories

Jumpers

Side Jumpers

For Use With	Pkg Qty.	Cat. No.
1492-WM4, W4	50	1492-N42
1492-H4, H5, H6, H7	10	1492-N49
	10	* 1492-SJS
1492-W3, WR3	10	1492-SJ5-10
1492-JD3, JD3C, JD3F, JDG3, JD3DF, JD3DR, JD3SS, JDG3P	50	1492-SJ5A-10
1492-JD3, JD3C, JD3F, JDG3, JD3DF, JD3DR, JD3SS, JDG3P	50	1492-SJ5A-24
1492-JD3, JD3C, JD3F, JDG3, JD3DF, JD3DR, JD3SS, JDG3P	50	1492-SJ5B-24
1492-JD3, JD3C, JD3F, JDG3, JD3DF, JD3DR, JD3SS, JDG3P	50	1492-SJ5B-10
1492-WM4, W4, W4TW	10	⚡ 1492-SJ6-10
1492-JT3M	5	1492-SJ6A-50
1492-W10	10	1492-SJ8-10
1492-JD3FB, JDG3FB	50	1492-SJ8A-4
1492-JD3FB, JDG3FB	50	1492-SJ8A-3
1492-JD3FB, JDG3FB	50	1492-SJ8A-2
1492-LMP3, LMP3Q, LMJ3, LM3, LM3Q, LMP3E, LMP3QE	50	1492-SJLM5-2
1492-WMD1	10	‡ 1492-SJMD5-12
1492-WFB4, WFB424, WFB4250	10	1492-SJFB8-10
1492-WM3	10	1492-SJM5-10
1492-WTF3, WTS3, WTF3LP, WTS3LP, WTF3LN, WTS3LN	10	1492-SJT5-20-R
1492-WTF3, WTS3, WTF3LP, WTS3LP, WTF3LN, WTS3LN	10	1492-SJT5-20-B

Note: Side jumpers carry the same current rating as the terminal block used with it

* Side jumper insulating sleeve only for use with Cat. No. 1492-N49

⚡ Use jumper on single side of terminal block only

‡ Uninsulated

Two-Level Jumper

For Use With	Pkg Qty.	Cat. No.
1492-LTF3 (Connects Two Levels within a 1492-LTF3 Terminal Block)	20	1492-CJL5D



Maximum number of multiple wire connections for copper conductors of the same cross-section and type for Allen-Bradley IEC Terminal Blocks. Cat. Nos. 1492-J and L products are all recommended for one conductor per terminal. Wire range is defined in the cat. page for each of the products.

In general, accessories for terminal blocks are not eligible for recognition by UL, CSA, or other third party approval agencies. The suitability of the installation must be judged in the end use application due to the wide variety of possible uses. However, accessories are designed to meet, and are tested to, the terminal block assembly requirements such as electrical spacings, etc.

Cat. No.	Wire Size [AWG]																		
	#30	#28	#26	#24	#22	#20	#18	#16	#14	#12	#10	#8	#6	#4	#2	#1	1/0	2/0	3/0
	Number of the Same Size Wires Per Terminal																		
1492-CA1	—	—	—	—	4	4	4	3	2	2	1	1	—	—	—	—	—	—	—
1492-CAM1	—	—	—	—	4	4	4	3	2	2	1	1	—	—	—	—	—	—	—
1492-H4	1	1	1	1	4	4	3	2	2	1	1	—	—	—	—	—	—	—	—
1492-H5	1	1	1	1	4	4	3	2	2	1	1	—	—	—	—	—	—	—	—
1492-H6	1	1	1	1	4	4	3	2	2	1	1	—	—	—	—	—	—	—	—
1492-H7	1	1	1	1	4	4	3	2	2	1	1	—	—	—	—	—	—	—	—
1492-HM3	—	—	—	—	4	4	4	3	2	2	1	1	—	—	—	—	—	—	—
1492-J10	—	—	—	—	4	4	4	4	3	2	1	1	1	—	—	—	—	—	—
1492-J16	—	—	—	—	—	—	1	4	4	3	2	1	1	1	—	—	—	—	—
1492-J2Q	—	—	4	4	4	3	1	1	1	1	—	—	—	—	—	—	—	—	—
1492-J3	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-J35	—	—	—	—	—	—	—	—	3	3	3	2	2	1	1	1	1	—	—
1492-J3F	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-J3P	4	4	4	4	3	3	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-J3TW (single side)	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-J3TW (twin side)	—	—	4	4	4	3	1	1	1	—	—	—	—	—	—	—	—	—	—
1492-J4	—	—	—	—	4	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-J4CTB	—	—	1	1	4	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-J4Q	1	1	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-J4TW	1	1	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-J50	—	—	—	—	—	—	—	—	—	—	1	2	2	1	1	1	1	—	—
1492-J6	—	—	—	—	4	4	3	3	3	2	1	1	—	—	—	—	—	—	—
1492-J70	—	—	—	—	—	—	—	—	5	5	5	2	2	2	1	1	1	1	1
1492-JC3	—	—	4	4	4	3	1	1	1	1	—	—	—	—	—	—	—	—	—
1492-JD3	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JD3DF	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JD3DR	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JD3F	4	4	4	4	4	4	3	1	1	1	—	—	—	—	—	—	—	—	—
1492-JD3FB	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-JD3PSS	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JD3PSSTP	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JD3PTP	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JD3RB***	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JD3RC001	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JD3SS	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JD4	—	—	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JD4C	—	—	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JDC3	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JDG3	4	4	4	4	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JDG3FB	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-JDG3P	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JDG3PSS	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JDG3PSSTP	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JDG3PTP	—	—	—	—	4	4	3	2	1	1	—	—	—	—	—	—	—	—	—
1492-JDG4	—	—	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—