

Safety Switches

Interlock Switches

Overview

Product Selection

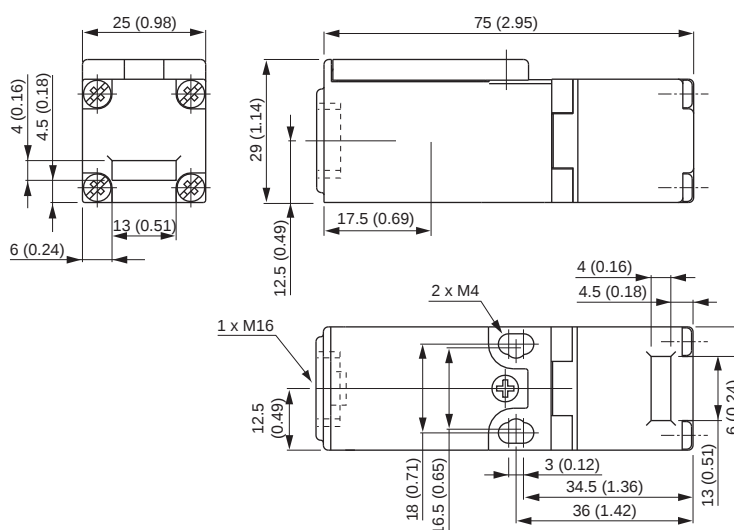
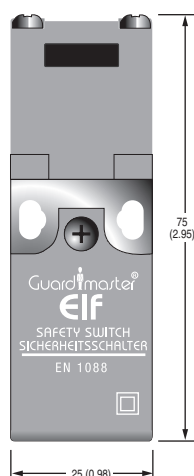
Description		Elf	Cadet 3	T15	T15 GD2	T5-T6	T5 GD2-T6 GD2	MT-GD2	TLS GD2	Atlas 5	440G-MT	Cat. No.
Standard actuator						✓						440K-A11095
Standard actuator				✓								440K-A11238
Standard actuator										✓		440G-A07136
GD2 standard actuator					✓		✓	✓	✓		✓	440G-A27011
Flat actuator, not to be used with metal alignment guide		✓	✓									440K-A21014
GD2 flat actuator					✓		✓	✓	✓		✓	440K-A11112
90° actuator, not to be used with metal alignment guide		✓	✓									440K-A21006
Fully flex actuator					✓		✓	✓	✓		✓	440G-A27143
Fully flex actuator										✓		440G-A07269
Extended flat actuator					✓		✓	✓	✓		✓	440K-A17116
Metal alignment guide with semi-flexible actuator		✓	✓									440K-A21030
Alignment guide with semi-flexible actuator				✓	✓	✓	✓	✓				440K-A11144
Alignment guide with fully-flexible actuator				✓		✓						440K-A27010
Catch and Retainer Kit						✓						440K-A11094
Replacement Alignment Guide						✓						440K-A11115

Accessories

	Description	Dimensions	Cat. No.
	Flat actuator, not to be used with metal alignment guide	3-52	440K-A21014
	90° actuator, not to be used with metal alignment guide	3-52	440K-A21006
	Metal alignment guide with semi-flexible actuator	3-52	440K-A21030
	Metal Alignment Guide	3-52	440K-A21069
	Replacement Cover	—	440A-A33085
	Dust Cover	—	440K-A17182

Approximate Dimensions

Dimensions are shown in mm (in.). Dimensions are not intended to be used for installation purposes.

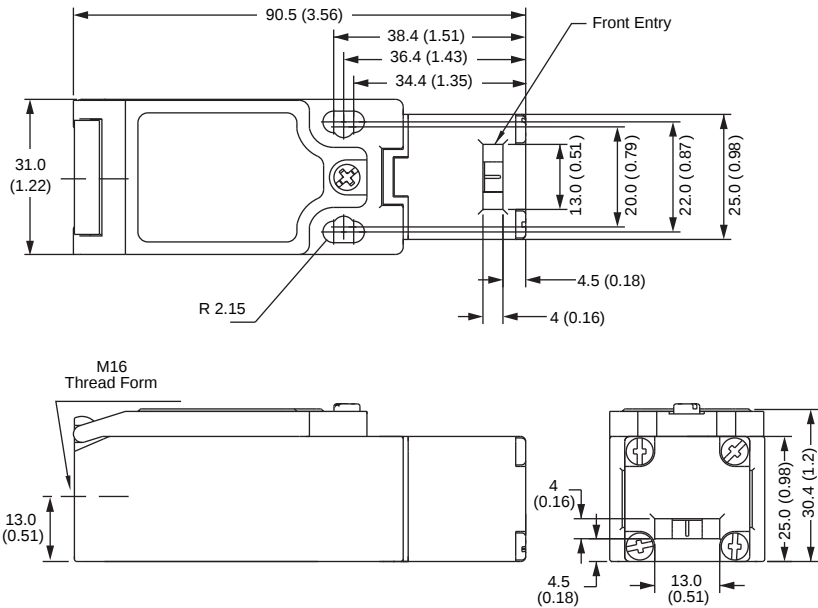


Accessories

Description		Dimensions	Cat. No.
	Flat actuator, not to be used with metal alignment guide	3-52	440K-A21014
	90° actuator, not to be used with metal alignment guide		440K-A21006
	Metal alignment guide with semi-flexible actuator		440K-A21030
	Replacement Cover	—	440A-A21115
	Dust Cover	—	440K-A17182






Approximate Dimensions

Dimensions are shown in mm (in.). Dimensions are not intended to be used for installation purposes.



Note: 2D, 3D and electrical drawings are available on www.ab.com.

Actuators* (continued)

Item	Description	Approximate Dimensions [mm (in.)]	Cat. No.
	90° actuator, not to be used with metal alignment guide		440K-A21006
	Flat actuator, not to be used with metal alignment guide		440K-A21014
	Metal alignment guide with semi-flexible actuator		440K-A21030
	Metal Alignment Guide		440K-A21069
	Alignment guide with fully-flexible actuator		440K-A27010

* See page 3-8 for Switch Compatibility table.