


# Cat. No. 194R-SDK2 NFPA 79 Compliant IEC Fused and Non-Fused Disconnect Switches, Side-mounted Kit

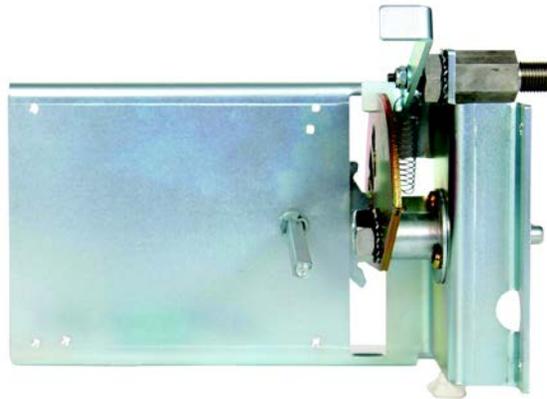

Cat. No. 194R-SDK2 Side-mounted Disconnect Switch Kit for all Bul. 194R 30 and 60 A Next Generation switches and Cat. No. 194R-P... handles

## Standards Compliance and Certifications

Standards Compliance for Disconnect Switch
IEC 60947-4-1/EN60947-3
BS EN60947-3
VDE 0660
CSA 22.2 No. 4
NEMA KS-1
UL 489

Certifications
UL Listed (File No. E119349, Guide WJAZ)
CSA Certified (File No. LR1234)
CE Marked

Standards Compliance for Kit: Side-mounted Handle Mechanism with Disconnect Switch
UL 98
CSA 22.2 No. 4

Certifications for Kit: Side-mounted Handle Mechanism with Disconnect Switch
UL Listed (File No. E 47426, Guide WHTY)
CSA Certified (File No. LR1234)

## Product Overview

The Cat. No. 194R-SDK2 side-mounted handle provides NFPA 79 compliance with a bracketed switch and interlock system. The 194R-P rotary handle is mounted to the side of the enclosure and attaches to the 194R disconnect switch and interlock mechanism. The side handle remains connected to the switch and interlock mechanism at all times. This solution provides the single, side handle design with the NFPA 79 compliance of the secondary interlock. This kit is used with the 194R-P family of disconnect switch handles (sold separately).

- Used with all 30/60 A fused and non-fused disconnect switches and Bulletin 194R-P handles (both sold separately)
- Open switches
- Operating handle ingress ratings:
  - IP66 (Type 3R, 3, 12, 4, 4X)
- Padlockable handle

## Product Selection

Description	For Use With	Cat. No.
Side-mounted kit (disconnect switch mechanism and bracket)	All Bul. 194R 30/60 A disconnect switches and Bul. 194R-P handles	194R-SDK2

## Approximate Dimensions

Dimensions in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

