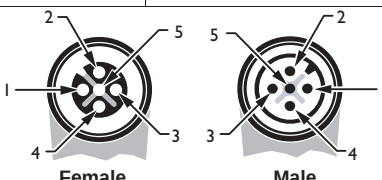


Connection Systems

Cordsets and Patchcords, DC Micro Style

18 and 22 AWG, Yellow, Black, or Blue PVC

Pinout and Color Code

Color Code	Face View Pinout							
	2-Pin		3-Pin		4-Pin		5-Pin	
								
A	1 NA 2 NA 3 Brown	4 Blue 5 NA	1 Brown 2 NA 3 Blue	4 Black 5 NA	1 Brown 2 White 3 Blue	4 Black 5 NA	1 Brown 2 White 3 Blue	4 Black 5 Grey
B	1 Brown 2 NA 3 NA	4 Blue 5 NA	—		—		—	

Product Selection

Cordsets

Pin Count	Color Code	Jacket Color	Wire Gauge	Cat. No.			
				Straight Female	Right Angle Female	Straight Male	Right Angle Male
2-Pin	A	Yellow	22 AWG	889D-F2AC-*	889D-R2AC-*	889D-M2AC-*	889D-E2AC-*
	B	Black		889D-F2BC-Q*	889D-R2BC-Q*	—	—
3-Pin	A	Yellow		889D-F3AC-*	889D-R3AC-*	889D-M3AC-*	889D-E3AC-*
	A	Yellow		889D-F4AC-*	889D-R4AC-*	889D-M4AC-*	889D-E4AC-*
4-Pin	A	Yellow	18 AWG	889D-F4AE-*	889D-R4AE-*	889D-M4AE-*	889D-E4AE-*
	A	Black	22 AWG	889D-F4BC-*	889D-R4BC-*	889D-M4BC-*	889D-E4BC-*
	A	Blue		889D-F4LC-*	889D-R4LC-*	889D-M4LC-*	889D-E4LC-*
	A	Yellow	22 AWG	889D-F5AC-*	889D-R5AC-*	889D-M5AC-*	889D-E5AC-*
5-Pin	A	Black		889D-F5BC-*	889D-R5BC-*	889D-M5BC-*	889D-E5BC-*

Patchcords

Pin Count	Color Code	Jacket Color	Wire Gauge	Cat. No.			
				Straight Female Straight Male	Straight Female Right Angle Male	Right Angle Female Straight Male	Right Angle Female Right Angle Male
2-Pin	A	Yellow	22 AWG	889D-F2ACDM-‡	889D-F2ACDE-‡	889D-R2ACDM-‡	889D-R2ACDE-‡
	B	Black	22 AWG	889D-F2BCDM-Q‡	889D-F2BCDE-Q‡	889D-R2BCDM-Q‡	889D-R2BCDE-Q‡
3-Pin	A	Yellow	22 AWG	889D-F3ACDM-‡	889D-F3ACDE-‡	889D-R3ACDM-‡	889D-R3ACDE-‡
4-Pin	A	Yellow	22 AWG	889D-F4ACDM-‡	889D-F4ACDE-‡	889D-R4ACDM-‡	889D-R4ACDE-‡
	A★	Yellow	22 AWG	889D-F4ACDM-V‡	889D-F4ACDE-V‡	889D-R4ACDM-V‡	889D-R4ACDE-V‡
	A	Yellow	18 AWG	889D-F4AEDM-‡	889D-F4AEDE-‡	889D-R4AEDM-‡	889D-R4AEDE-‡
	A	Black	22 AWG	889D-F4BCDM-‡	889D-F4BCDE-‡	889D-R4BCDM-‡	889D-R4BCDE-‡
	A	Blue	22 AWG	889D-F4LCDM-‡	889D-F4LCDE-‡	889D-R4LCDM-‡	889D-R4LCDE-‡
	A	Yellow	22 AWG	889D-F5ACDM-‡	889D-F5ACDE-‡	889D-R5ACDM-‡	889D-R5ACDE-‡
5-Pin	A	Yellow	22 AWG	889D-F5BCDM-‡	889D-F5BCDE-‡	889D-R5BCDM-‡	889D-R5BCDE-‡

* Replace symbol with 2 (2 m), 5 (5 m) or 10 (10 m) for standard cable lengths.

‡ Replace symbol with 0M3 (1 ft), 1 (1 m), 2 (2 m), 5 (5 m) or 10 (10 m) for standard lengths.

★ See Wiring Diagrams.

Note: Stainless steel connectors may be ordered by adding an "S" to the bulletin number (e.g. 889DS-F4AC-*)