



Installation Instructions

Enclosed Power Blocks

Bloc d'alimentation protégé

Eingeschlossener Stromblock

Morsetto di potenza con guscio

Bloque de potencia con protección

Catalog Numbers 1492-PDE1 _ _ _



Made in USA

Voltage: 600V AC/DC (UL/CSA)
1000V AC/DC (CE)

Current: 200 Amps (Cu Wire only)



WARNING

AVERTISSEMENT

WARNUNG

AVVERTENZA

ADVERTENCIA

To prevent electrical shock, disconnect from power source before installing or servicing.



Avant le montage et la mise en service, couper l'alimentation secteur pour éviter toutes décharges.


Vor Installations- oder Servicearbeiten Stromversorgung unterbrechen, um Elektroschocks zu vermeiden.

Per prevenire infortuni, togliere tensione prima dell'installazione o manutenzione.

Desconéctese de la corriente eléctrica, antes de la instalación o del servicio, a fin de impedir sacudidas eléctricas.

Catalog Number	Termination			Wire Range (English - AWG)	Connector Hole Diameter Size	Wire Strip Length	Torque -0, +10% lb-in / Nm	Hex Drive Size	SCCR Ratings (Default 10kA Rating unless shown in table below)														
	Line/Load	Stranded Wire	B - C	3/0 - 8	0.531 in	7/8 in 22 mm	180 / 20.3	6 mm	Wire Type (Class)	Wire Range (AWG)		Max Fuse Protection Req. Amp Rating / Class						SCCR RMS Sym. Amps 600V Max.					
			G, H	2/0 - 8			50 / 5.6			Line	Load	J	T	RK1	RK5	G	CC						
			I	2/0 - 8			180 / 20.3		B - C	3/0 - 8	3/0 - 8	225	225	200	60	60	30	100,000					
				10 - 14			50 / 5.6		G - I	2/0 - 8	2/0 - 8	300	300	200	100	60	30						
			Solid Wire				10 - 14		50 / 5.6	Minimum Enclosure Size: 16 x 12 x 6 in.													
			Line	Stranded Wire			B - C		3/0 - 8	0.531 in	7/8 in 22 mm	180 / 20.3	6 mm	Wire Type (Class)	Wire Range (AWG)		Max Fuse Protection Req. Amp Rating / Class						SCCR RMS Sym. Amps 600V Max.
							G, H		2/0 - 8			50 / 5.6			Line	Load	J	T	RK1	RK5	G	CC	
I	2/0 - 8				180 / 20.3	B - C	3/0 - 8	2 - 8	225			225		200	60	60	30	100,000					
	10 - 14				50 / 5.6		3/0 - 8	8 - 14	100			110		100	30	60	30						
Solid Wire				10 - 14	50 / 5.6	0.312 in	11/16 in 17.3 mm	50 / 5.6	4 mm			G - H		2/0 - 8	4 - 8	225	225	200	60	60	30		
Stranded Wire	B - C		2 - 8	I	2/0 - 8			4 - 8		225	225		200	60	60	30							
	G, H		4 - 8		50 / 5.6			2/0 - 8		8 - 12	100	110	100	30	60	30							
	I		4 - 8	40 / 4.5																			
	Solid Wire		10 - 14	40 / 4.5	Minimum Enclosure Size: 16 x 12 x 4 in.																		

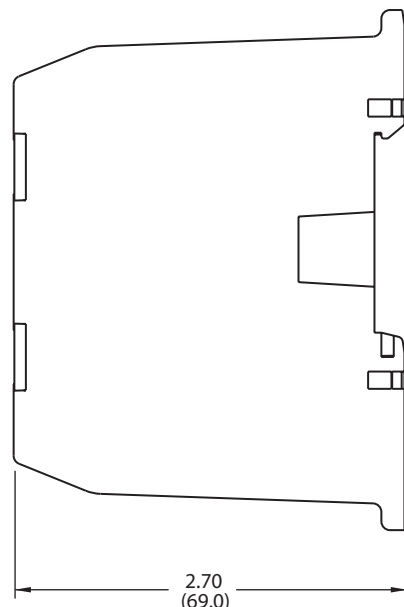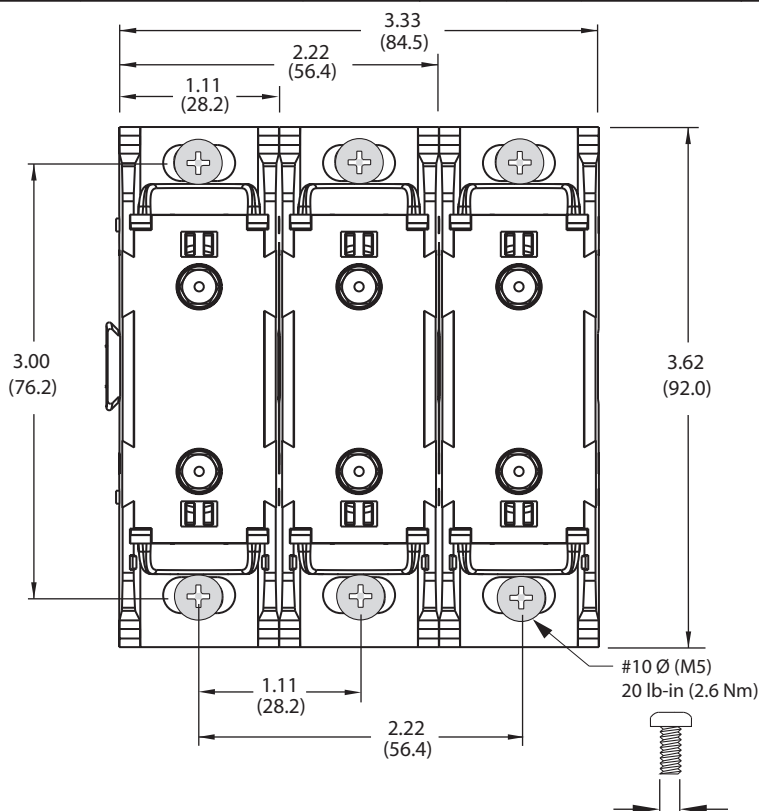

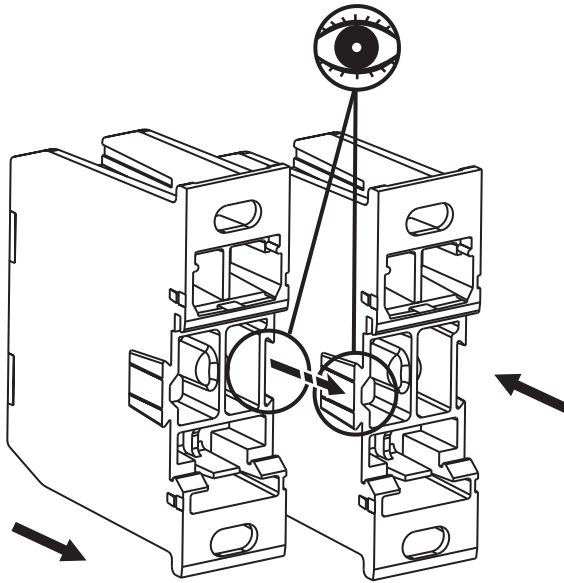

Please note: Once these devices are ganged together, they can not be separated.
 A noter: une fois que ces dispositifs sont assemblés, il est impossible de les séparer.
 Hinweis: Verbundene Geräte können nicht mehr getrennt werden.
 Nota: una volta montati in serie, questi dispositivi non possono essere separati.
 Nota: una vez que se hayan unido estos dispositivos, no podrán separarse.

