




Configuration Results

Product: 440G-T27174

Description: Guard Locking Switch - 440G
 TLS-GD2: Solenoid Voltage:
 110V AC/DC, Contacts(Safety
 and Aux): 2 Normally Closed, 1
 Normally Open, Actuator: Fully-
 Flex, Conduit Entry: 1/2 in NPT
 Adapter

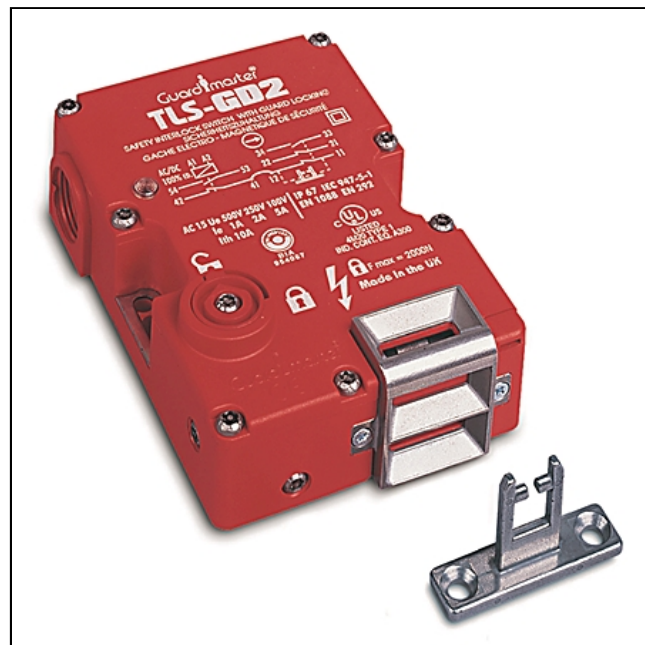

Representative Photo Only (actual product may vary based on configuration selections)

Selected Components

Selected Components

Catalog Number	Qty	Product Description	Supplementary Documents
440G-T27174	1	Guard Locking Switch - 440G TLS-GD2: Solenoid Voltage: 110V AC/DC, Contacts(Safety and Aux): 2 Normally Closed, 1 Normally Open, Actuator: Fully-Flex, Conduit Entry: 1/2 in NPT Adapter	- Product Details and Certifications - Photo 2-Dimensional Drawing (DWG/DXF) 3-Dimensional STEP model (STP)

Contact your [Rockwell Automation Distributor or sales representative](#) for local pricing.

[Modify](#)

[Cancel](#)

[E Mail](#)