


221 Series for 12 AWG

24 - 12 AWG 600 V / 20 A	105 °C operating temp  0.43 in / 11 mm	24 - 12 AWG 600 V / 20 A	105 °C operating temp  0.43 in / 11 mm	24 - 12 AWG 600 V / 20 A	105 °C operating temp  0.43 in / 11 mm
2-conductor connector, with levers		3-conductor connector, with levers		5-conductor connector, with levers	
					
Item No.	Pack-Unit pcs	Item No.	Pack-Unit pcs	Item No.	Pack-Unit pcs
221-412	1=box of 100	221-413	1=box of 50	221-415	1=box of 25
221-412/VE00-2500	2500 (bulk)	221-413/VE00-2500	2500 (bulk)	221-415/VE00-1000	1000 (bulk)
221-412/996-010	1=10 (clamshell)	221-413/996-010	1=10 (clamshell)	221-415/996-010	1=10 (clamshell)
221-412/K194-4045/000-100	1=jug of 550	221-413/K194-4045/000-100	1=jug of 350	221-415/K194-4045/000-100	1=jug of 225

221 Series for 10 AWG

- Same design and handling as the original 221, but for larger conductors (10 AWG) and greater current capacity (30 A)
- Universal connection technology for ALL copper conductor types sized 20 – 10 AWG
- Proven and familiar lever technology

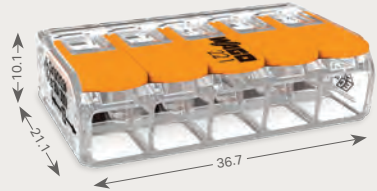

20 - 10 AWG 600 V / 30 A	105 °C operating temp  0.43 in / 11 mm	20 - 10 AWG 600 V / 30 A	105 °C operating temp  0.43 in / 11 mm	20 - 10 AWG 600 V / 30 A	105 °C operating temp  0.43 in / 11 mm
2-conductor connector, with levers		3-conductor connector, with levers		5-conductor connector, with levers	
					
Item No.	Pack-Unit pcs	Item No.	Pack-Unit pcs	Item No.	Pack-Unit pcs
221-612	1=box of 50	221-613	1=box of 30	221-615	1=box of 15
221-612/VE00-1000	1000 (bulk)	221-613/VE00-1000	1000 (bulk)	221-615 / VE00-500	500 (bulk)