






	1492-HC6	1492-HJ86	1492-HJ812
			
			Dimensions are not intended to be used for manufacturing purposes.
Specifications	High-density 6-pole panel mount terminal block. Can be interconnected to make 12- and 18-pole units.		Standard 6-pole panel mount block. Screw terminal with wire clamp.
Certifications	UL/CSA		UL/CSA
Voltage Rating	600V AC/DC		600V AC/DC
Maximum Current (per pole)	25 A		25 A
Wire Range (Rated Cross Section)	#30...#12 AWG (0.05...4 mm ²)		#16...#12 AWG (1.5...4 mm ²)
Wire Strip Length	0.38 in. (9.7 mm)		0.38 in. (9.7 mm)
Recommended Tightening Torque	3...7 lb•in (0.3...0.8 N•m)		8...16 lb•in (0.9...1.8 N•m)
Insulation Temperature Range	-40...+221 °F (-40...+105 °C)		-40...+221 °F (-40...+105 °C)
Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.
Terminal Block	1492-HC6	1	1492-HJ86
Accessories (page 12-109)	Cat. No.	Pkg Qty.	Cat. No.
Jumpers:			
2-Pole Uninsulated	1492-N38	50	1492-N38
50-pole Uninsulated	1492-N39	10	—
Insulating Sleeve	1492-SJS	10	—
Anchor Unit: (required every 12th block)	Not Required	—	Not Required
End Piece	Not Required	—	Not Required

* #8-32 screw.

* Measurement between mounting screw centers.


‡ Mounting screws are offset 0.31 in. (7.9 mm) from centerline.

§ Mounting screws are offset 0.19 in. (4.76 mm) from centerline.


	1492-15T	1492-25T
Dimensions are not intended to be used for manufacturing purposes.		
	High temperature 1-pole panel mount block, wire clamp. Gangable for multi-pole installation.	High temperature 1-pole panel mount block, wire clamp. Gangable for multi-pole installation.
Specifications		
Voltage Rating	600V AC/DC	
Maximum Current (per pole)	35 A	
Wire Range (Rated Cross Section)	#16...12 AWG (1.5...4 mm ²)	
Wire Strip Length	0.38 in. (9.7 mm)	
Recommended Tightening Torque	10...16 lb•in (1.1...1.8 N•m)	
Insulation Temperature Range	-40...+300 °F (-40...+149 °C)	
Terminal Blocks	Cat. No.	Pkg Qty.
Terminal Block	1492-15T	100
Accessories (page 12-109)	Cat. No.	Pkg Qty.
Anchor Unit: (required every 12th block)	1492-25A	10
End Piece	1492-15E	25

End Anchors


1492-EAHJ35




1492-N23



1492-15A, 1492-25A




1492-15E, 1492-25E




1492-N2



1492-N47



Cat. No.	A	B	C	D	E
1492-15A	1.5 in. (38.1 mm)	1.03 in. (26.2 mm)	0.594 in. (15.1 mm)	0.234 in. (5.9 mm)	0.75 in. (19.1 mm)
1492-15E	1.5 in. (38.1 mm)	1.03 in. (26.2 mm)	0.594 in. (15.1 mm)	0.234 in. (5.9 mm)	—
1492-25A	1.88 in. (47.8 mm)	1.19 in. (30.2 mm)	0.688 in. (17.5 mm)	0.203 in. (5.2 mm)	0.97 in. (24.6 mm)
1492-25E	1.88 in. (47.8 mm)	1.19 in. (30.2 mm)	0.688 in. (17.5 mm)	0.234 in. (5.9 mm)	—

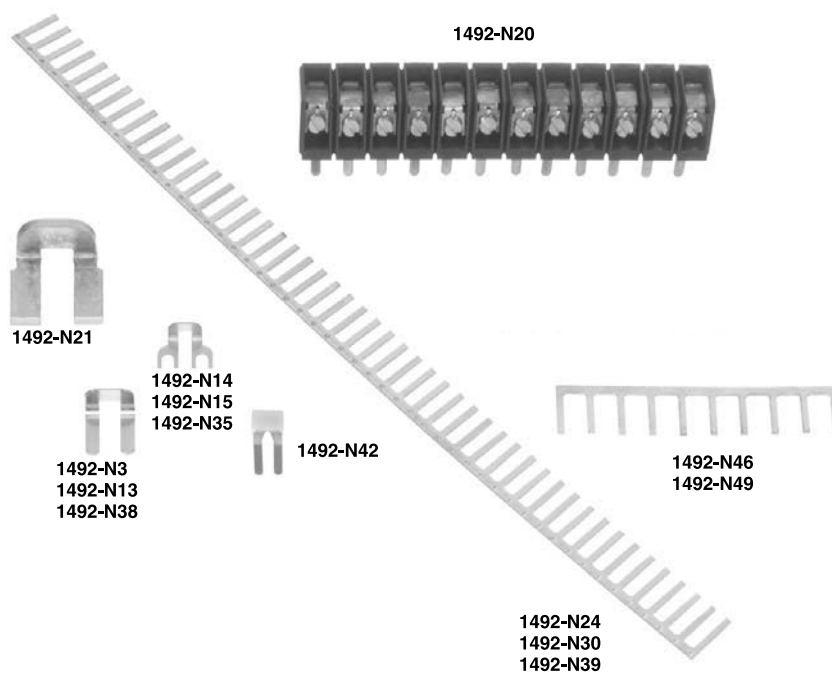

* The 1492-SJS Insulating Sleeve reduces exposure to live parts on the 1492-N39 and 1492-N49. The 1492-SJS used with the 1492-N39 and 1492-H1 or 1492-HM1 provides IEC 947 IP2X finger protection.

