

Momentary Push Button Operators, Non-Illuminated — with Two-Color Molded Legend Caps



Flush Operator
Cat. No. 800FP-F301

Table with columns: Button Color, Text Color, Legend Text, Pkg. Quantity, Flush (Plastic/Metal), Extended (Plastic/Metal). Rows include various button configurations like Green/White/START, Red/White/STOP, and Black/White/arrow.

800F P - F 3 01
a b c d

Four sub-tables: a. Operator Construction (Code P: Round plastic, Code M: Round metal); b. Operator Type (Code F: Flush, Code E: Extended, Code G: Guarded); c. Color Cap (Code 0-6: Orange, White, Black, Green, Red, Yellow, Blue); d. Legend Text (Code 01-11: No Text, START, STOP, O, I, arrow, Forward, Reverse, R).

* For custom laser-engraved legend cap, order "no cap" option on page 10-73 plus custom laser-engraved cap on page 10-115.
* White and yellow caps have black text. All other color caps have white text.
§ Legend button cap supplied loose for customer installation.
♣ Available for flush only.
‡ Valid color cap/legend text codes include:

Table with columns: Color, Text (Flush Caps, Extended Caps). Rows show combinations for White, Black, Green, Red, Yellow, and Blue.

Momentary Push Button Operators, Illuminated — Flush, Extended, Guarded



Flush Operator
 Cat. No. 800FM-LF4



Extended Operator
 Cat. No. 800FP-LE3



Guarded Operator
 Cat. No. 800FP-LG3

Color	Pkg. Quantity	Flush		Extended	
		Plastic	Metal	Plastic	Metal
Cat. No.		Cat. No.	Cat. No.	Cat. No.	Cat. No.
Green	1	800FP-LF3	800FM-LF3	800FP-LE3	800FM-LE3
Red		800FP-LF4	800FM-LF4	800FP-LE4	800FM-LE4
Yellow		800FP-LF5	800FM-LF5	800FP-LE5	800FM-LE5
Clear		800FP-LF7	800FM-LF7	800FP-LE7	800FM-LE7

800F P - LE 3 -
 a b c d

a

Operator Construction	
Code	Description
P	Round plastic operator (IP66, Type 4/4X/13)
M	Round metal operator (IP66, Type 4/13)

c

Color Cap *	
Code	Color
0	Amber*
3	Green
4	Red
5	Yellow*
6	Blue*
7	Clear
9	No cap

d

Packaging	
Code	Description
Blank	1 per package
BP	10 per package†


b

Operator Type	
Code	Description
LF	Flush
LE	Extended
LG	Guarded

* For custom laser-engraved operator, order operator with applicable lens cap color plus custom laser-engraved diffuser; see page 10-115.
 * When using LED for illumination, a white LED is recommended.
 † Only available with no color cap (9 from Table c).

Push-to-Test Push Button Device Schematic

Illuminated push buttons may be wired as a push-to-test device by using the following schematic and Cat. No. 800F-XD7 Diode module from page 10-111.

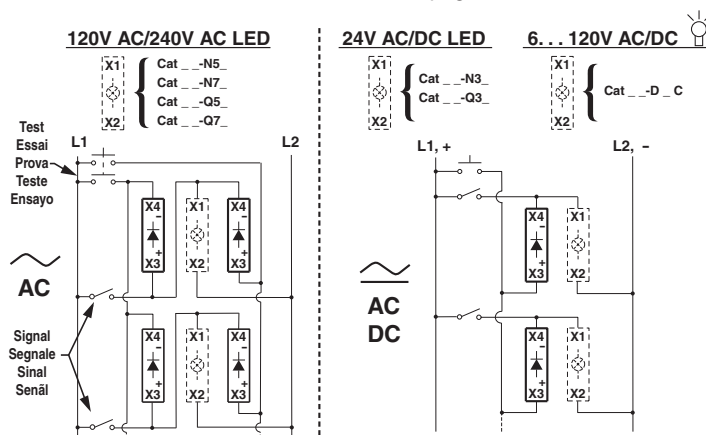

Alternate Action Operators — Non-Illuminated



Cat. No. 800FM-FA3

800F M FA 3
 a b c

Operator Construction	
Code	Description
P	Round plastic operator (IP66, Type 4/4X/13)
M	Round metal operator (IP66, Type 4/13)

Operator Type*	
Code	Description
FA	Non-illuminated, flush, alternate action

Color Cap*	
Code	Color
0	Orange
1	White
2	Black
3	Green
4	Red
5	Yellow
6	Blue
9	No cap
X	Assortment pack

* Must use N.O.E.M. or N.C. contacts.
* For custom laser-engraved legend cap, order "no cap" option plus custom laser-engraved cap on page 10-115.

Alternate Action Operators — Illuminated



Cat. No. 800FP-LFA3

800F P LFA 3
 a b c

Operator Construction	
Code	Description
P	Round plastic operator (IP66, Type 4/4X/13)
M	Round metal operator (IP66, Type 4/13)

Operator Type§*	
Code	Description
LFA	Illuminated, flush, alternate action

Color Cap>	
Code	Color
0	Amber‡
3	Green
4	Red
5	Yellow‡
6	Blue‡
7	Clear
9	No lens

§ Must use N.O.E.M. or N.C. contacts.
* LED module required for illumination, can not use incandescent module.
> For custom laser-engraved operator, order operator with applicable lens cap color plus custom laser-engraved diffuser on page 10-115.
‡ Use of a white LED is recommended.

Overview, Continued

3-Across x 2-Deep Back-of-Panel (6 Circuits Max.)

- Rugged snap-fit design for plastic or metal latch
- Stackable contact blocks
- Rotating collar for easy one-hand latch removal
- Color-coded contact block plungers for contact identification




Plastic Latch with Contact Block



Metal Latch with Contact Block

Assembly Overview

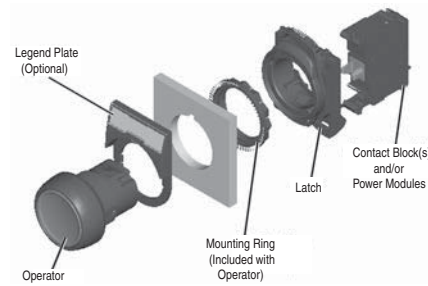

Specifications*

Front-of-Panel (Operators)

Mechanical Ratings		
Description	Plastic (Bulletin 800FP)	Metal (Bulletin 800FM)
Vibration (assembled to panel)	Tested at 10...2000 Hz, 1.52 mm displacement (peak-to-peak) max./10 G max. for 3 hr duration, no damage	
Shock	Tested at 1/2 cycle sine wave for 11 ms; no damage at 100 G	
Degree of protection*	IP65/66 (Type 3/3R/4/4X/12/13)	IP65/66 (Type 3/3R/4/12/13)
Mechanical durability per EN 60947-5-1 (Annex C)	10 000 000 Cycles	Momentary push buttons, momentary mushroom
	1 000 000 Cycles	Multi-function, selector switch, key selector switch, selector jog, SensEject™ key selector switch
	500 000 Cycles	Non-illuminated push-pull E-stop‡
	300 000 Cycles	Twist-to-release E-stop, illuminated push-pull E-stop‡, alternate action push buttons
	100 000 Cycles	Potentiometer, toggle switch
Operating forces (typical with one contact block)	Flush/extended = 5 N, E-stop = 36 N Mushroom = 9 N	
Operating torque (typical application with one contact block)	Selector switch = 0.25 N•m (2.2 lb•in)	
Mounting torque	Plastic	1.7 N•m (15 lb•in)
	Metal	4.4 N•m (40 lb•in)
Environmental		
Temperature range (operating)	-25...+70 °C (-13...+158 °F)§	
Temperature range (short term storage)	-40...+85 °C (-40...+185 °F)	
Humidity	50...95% RH from 25...60 °C (77...140 °F)	

* Performance Data — see page Important-3 of the Industrial Controls catalog.

⚡ Momentary mushroom operators are IP65. Plastic keyed operators are IP66, Type 4/13; not Type 4X.

‡ Limit of four contact blocks max. for these devices.

§ Operating temperatures below 0 °C (32 °F) are based on the absence of freezing moisture and liquids, UL Recognized to 55 °C (131 °F) - Incandescent module max. 40 °C (104 °F).


Product Certifications

Certifications	UR/UL, CSA, CCC, CE
Standards Compliance — CE Marked	NEMA ICS-5; UL 508, EN ISO 13850, EN 60947-1, EN 60947-5-1, EN 60947-5-5
Terminal Identification	EN/IEC 60947-1
Shipping Approvals	ABS
RoHS	✓


Approximate Dimensions

Dimensions in millimeters. Dimensions are not intended to be used for manufacturing purposes. Refer to RAISE software for additional dimensional information.


Non-Illuminated and Illuminated Momentary Flush Push Button Operators




Illuminated Momentary Guarded Push Button Operators




Illuminated and Non-Illuminated Momentary Extended Push Button Operators




Reset Operators with Reset Rod

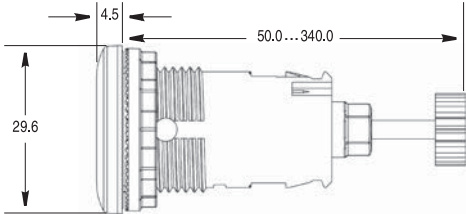


Non-Illuminated Guarded, Illuminated and Non-Illuminated Alternate Action Push Button Operators




Pilot Light Operators




90 mm Half Dome



90 mm Mushroom




Illuminated and Non-Illuminated Momentary Mushroom Operators 40 mm and 60 mm



Operator	A
40 mm	39.8
60 mm	59.8

Toggle Switch Operators

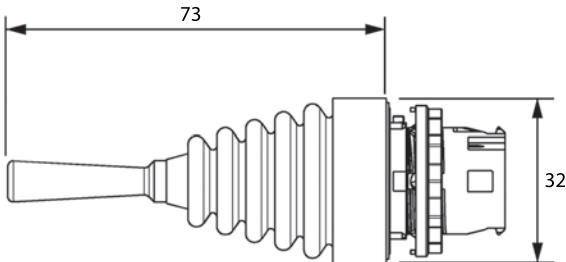

Selector Jog Operators

