

TLS-Z GD2 Safety Guard Locking Switches



Allen-Bradley




Guardmaster®

TLS-GD2 family of Guard Locking Switches expands to support performance level “e” (PLe)

Features and Benefits

- **Built-in uniquely coded RFID door sensor** with inductive door position sensing will detect if actuator key breaks or becomes separated from its door mounted position. The door sensor works with a door target that is mounted with the included fully flexible actuator.
- **Identical profile** to standard TLS-GD2. This means the TLS-Z GD2 can be retrofitted in place of existing TLS-GD2 thus making it an easy, cost-effective solution with an upgrade to PLe – the highest performance level.
- **Solid-state contacts** – 2 safety PNP outputs and 1 auxiliary PNP output are substituted for traditional electromechanical contacts. These solid-state contacts can be connected in series with other devices such as Light Curtains, E-stops and SensaGuard switches.
- **TÜV certified** to Performance Level “e” to EN ISO 13849-1.
- **Available** in power-to-release or power-to-lock models.
- **Easy wiring** with M12 8-Pin Quick Disconnect.
- **Choice of auxiliary functionality** – Either lock status (locked/unlocked) or door position status (door open/closed).

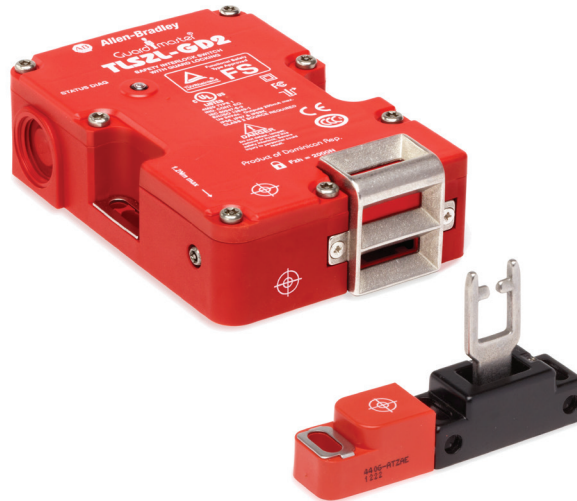

The Allen-Bradley® Guardmaster® TLS-ZR GD2 and TLS-ZL GD2 Guard Locking Switches from Rockwell Automation are two new additions to the existing TLS GD2 family. The TLS-ZR GD2 is a power-to-release and the TLS-ZL GD2 is a power-to-lock unit. In mechanical configuration these new switches are identical to the existing TLS-GD2 family with the exception of an additional RFID door target which is mounted close coupled with the supplied fully-flexible actuator.

The RFID door target is uniquely coded and provides the internal microprocessor with additional door position information. Therefore, in the event of a broken or missing actuator key the microprocessor will shut down the OSSD safety outputs. This extra functionality provides performance level “e” to EN/ISO 13849-1.

These switches have built-in microprocessor technology and have two channel OSSD solid-state outputs. Locking/unlocking is achieved using a logic level signal input.

The TLS-Z GD2 has an ingress protection rating of IP69K making them suitable for harsh washdown applications as found in the food and beverage, pharmaceutical, solar and semiconductor industries.

LISTEN.
THINK.
SOLVE.



Allen-Bradley • Rockwell Software


**Rockwell
Automation**

Product Selection

Description	Cat. No.
TLS-ZR GD2 guard locking switch OSSD non-contact power-to-unlock, QD 24V, auxiliary lock status	440G-TZS21UPRH
TLS-ZL GD2 guard locking switch OSSD non-contact power-to-lock, QD 24V, auxiliary lock status	440G-TZS21UPLH
TLS-ZR GD2 guard locking switch OSSD non-contact power-to-unlock, QD 24V, auxiliary door position status	440G-TZS21UTRH
TLS-ZL GD2 guard locking switch OSSD non-contact power-to-lock, QD 24V, auxiliary door position status	440G-TZS21UTLH

Note: Sensor and actuator is supplied with the switch.

Accessories

Description		Cat. No.
 Target	Spare RFID Door Target	440G-ATZA
	Fully flexible actuator	440G-A27143
	Cover for TLS-1 with external override key for series E and later	440G-A27371
	Cover for TLS-1 with override key attached for series E and later	440G-A27373
	Emergency override key	440G-A36026
	Flexible release—1 m (3.28 ft) cable	440G-A27356
	Flexible release—3 m (9.84 ft) cable	440G-A27357
	Dust cover	440K-A17183

Connection Systems

Description	Cat. No.
Cordset	889D-F8AB-*
Patchcord	889D-F8ABDM-*
Safety Wired T-Port	898D-438Y-D8
Safety Wired Shorting Plug	898D-418U-DM
4 Port M12, 8-pin Safety Distribution Box	898D-P84RT-M19
8 Port M12, 8-pin Safety Distribution Box	898D-P88RT-M19
M12, 8-pin Shorting Plug	898D-81RU-DM

* Replace symbol with 2 (2m), 5 (5m), or 10 (10m) for standard cable lengths.

* Replace symbol with 1 (1m), 2 (2m), 3 (3m), 5 (5m), or 10 (10m) for standard lengths.

Allen-Bradley, Guardmaster, LISTEN. THINK. SOLVE. and Rockwell Software are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846