



871TM DC Cable Style
12, 18, 30 mm



871TM DC Mini
Quick-Disconnect Style
12, 18, 30 mm



871TM DC Micro
Quick-Disconnect Style
12, 18, 30 mm

Specifications

Load Current	≤25 mA
Minimum Load Current	2 mA
Leakage Current	≤0.9 mA
Operating Voltage	10...30V DC
Voltage Drop	≤8V
Repeatability	10% typical
Hysteresis	10% typical
False Pulse Protection	Incorporated
Transient Noise Protection	Incorporated
Reverse Polarity Protection	Incorporated
Short Circuit Protection	Incorporated
Overload Protection	Incorporated
Certifications	UL Listed, CSA Certified and CE Marked for all applicable directives
Enclosure	NEMA 1, 2, 3, 3R, 4, 4X, 6P, 12, 13; IP67 (IEC 529) all models; 1200 psi (8270 kPa) washdown; stainless steel face and barrel; ToughLink™ and micro connector versions are also rated IP69K (IEC 529)
Connections	Cable: 2 m (6.5 ft) length A2—2-conductor #22 AWG PVC C2—2-conductor #22 AWG ToughLink H2—2-conductor #18 AWG ToughLink Quick-Disconnect: 4-pin mini style 4-pin micro style
LED	Red: Output energized
Operating Temperature [C (F)]	-25...+70° (-13...+158°)
Shock	30 g, 11 ms
Vibration	55 Hz, 1 mm amplitude, 3 planes

Features

- 2-wire operation
- 2-conductor or 4-pin connection
- 10...30V DC
- Normally open or normally closed output
- Short circuit, overload, false pulse, reverse polarity, and transient noise protection
- UL Listed, CSA Certified and CE Marked for all applicable directives

Correction Factors

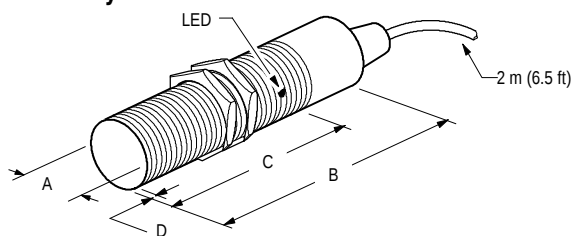
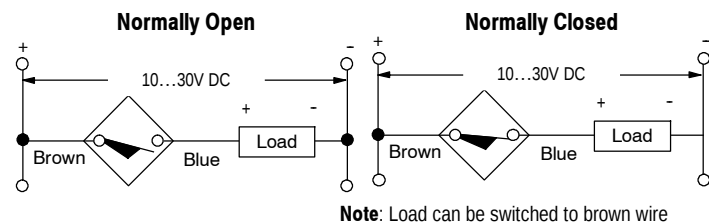
Target Material	Correction Factor
Steel	1.0
Stainless Steel	0.9...1.0
Brass	0.3...0.5
Aluminum	0.1...0.4
Aluminum ≤0.020 Thick	0.9...1.1
Copper	0.4...0.6

871TM 2-Wire DC**Stainless Steel Face/Threaded Short Stainless Steel Barrel****Product Selection**

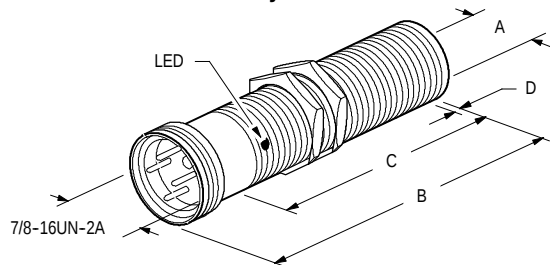

Barrel Dia.	Nominal Sensing Distance [mm (in.)]	Shielded	Output Configuration	Switching Frequency [Hz]	Cat. No.			
					PVC Cable	ToughLink™ Cable	Mini QD Style	Micro QD Style
12 mm	2 (0.08)	Y	N.O.	75	871TM-DH2NE12-A2	871TM-DH2NE12-C2	871TM-DH2NE12-N4	871TM-DH2NE12-D4
	4 (0.16)	N			871TM-DH4NE12-A2	871TM-DH4NE12-C2	871TM-DH4NE12-N4	871TM-DH4NE12-D4
	2 (0.08)	Y	N.C.	70	871TM-DH2CE12-A2	871TM-DH2CE12-C2	871TM-DH2CE12-N4	871TM-DH2CE12-D4
	4 (0.16)	N			871TM-DH4CE12-A2	871TM-DH4CE12-C2	871TM-DH4CE12-N4	871TM-DH4CE12-D4
18 mm	5 (0.20)	Y	N.O.	60	871TM-DH5NE18-A2	871TM-DH5NE18-H2	871TM-DH5NE18-N4	871TM-DH5NE18-D4
	8 (0.31)	N			871TM-DH8NE18-A2	871TM-DH8NE18-H2	871TM-DH8NE18-N4	871TM-DH8NE18-D4
	5 (0.20)	Y	N.C.	40	871TM-DH5CE18-A2	871TM-DH5CE18-H2	871TM-DH5CE18-N4	871TM-DH5CE18-D4
	8 (0.31)	N			871TM-DH8CE18-A2	871TM-DH8CE18-H2	871TM-DH8CE18-N4	871TM-DH8CE18-D4
30 mm	10 (0.39)	Y	N.O.	40	871TM-DH10NE30-A2	871TM-DH10NE30-H2	871TM-DH10NE30-N4	871TM-DH10NE30-D4
	15 (0.59)	N			871TM-DH15NE30-A2	871TM-DH15NE30-H2	871TM-DH15NE30-N4	871TM-DH15NE30-D4
	10 (0.39)	Y	N.C.	30	871TM-DH10CE30-A2	871TM-DH10CE30-H2	871TM-DH10CE30-N4	871TM-DH10CE30-D4
	15 (0.59)	N			871TM-DH15CE30-A2	871TM-DH15CE30-H2	871TM-DH15CE30-N4	871TM-DH15CE30-D4
Recommended Standard QD Cordset (-6F = 1.8 m (6 ft), -2 = 2 m (6.5 ft))							889N-F4AFC-6F	889D-F4AC-2

QD Cordsets and Accessories

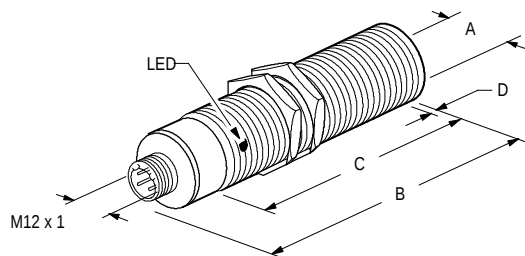

Description	Page Number
Other Cordsets Available	8-2
Terminal Chambers	8-2
Mounting Brackets	2-210...2-214
End Caps	2-219, 2-220
Mounting Nuts	2-221...2-222

Approximate Dimensions [mm (in.)]**Cable Style****Wiring Diagrams**

Thread Size	Shielded	[mm (in.)]			
		A	B	C	D
M12 X 1	Y	12.0 (0.47)	49.8 (1.96)	26.4 (1.04)	2.5 (0.10)
	N			19.5 (0.77)	9.4 (0.37)
M18 X 1	Y	18.0 (0.71)	55.4 (2.18)	41.7 (1.64)	2.5 (0.10)
	N				14.5 (0.57)
M30 X 1.5	Y	30.0 (1.18)	57.9 (2.28)	41.9 (1.65)	2.5 (0.10)
	N			39.4 (1.55)	18.0 (0.71)

Approximate Dimensions [mm (in.)] (continued)**Mini Quick-Disconnect Style****Wiring Diagrams****Normally Open or Normally Closed****Note:** Load can be switched to pin 2.

Thread Size	Shielded	[mm (in.)]			
		A	B	C	D
M12 X 1	Y	12.0 (0.47)	63.5 (2.50)	25.4 (1.00)	2.5 (0.10)
	N			18.5 (0.73)	9.4 (0.37)
M18 X 1	Y	18.0 (0.71)	56.1 (2.21)	35.1 (1.38)	2.5 (0.10)
	N			29.2 (1.15)	14.5 (0.57)
M30 X 1.5	Y	30.0 (1.18)	68.1 (2.68)	41.9 (1.65)	2.5 (0.10)
	N			39.4 (1.55)	18.0 (0.71)

Micro Quick-Disconnect Style**Normally Open or Normally Closed****Note:** Load can be switched to pin 3.

Thread Size	Shielded	[mm (in.)]			
		A	B	C	D
M12 X 1	Y	12.0 (0.47)	61.0 (2.40)	26.4 (1.04)	2.5 (0.10)
	N			19.6 (0.77)	9.4 (0.37)
M18 X 1	Y	18.0 (0.71)	65.0 (2.56)	41.7 (1.64)	2.5 (0.10)
	N				14.5 (0.57)
M30 X 1.5	Y	30.0 (1.18)	66.3 (2.61)	41.9 (1.65)	2.5 (0.10)
	N			39.4 (1.55)	18.0 (0.71)