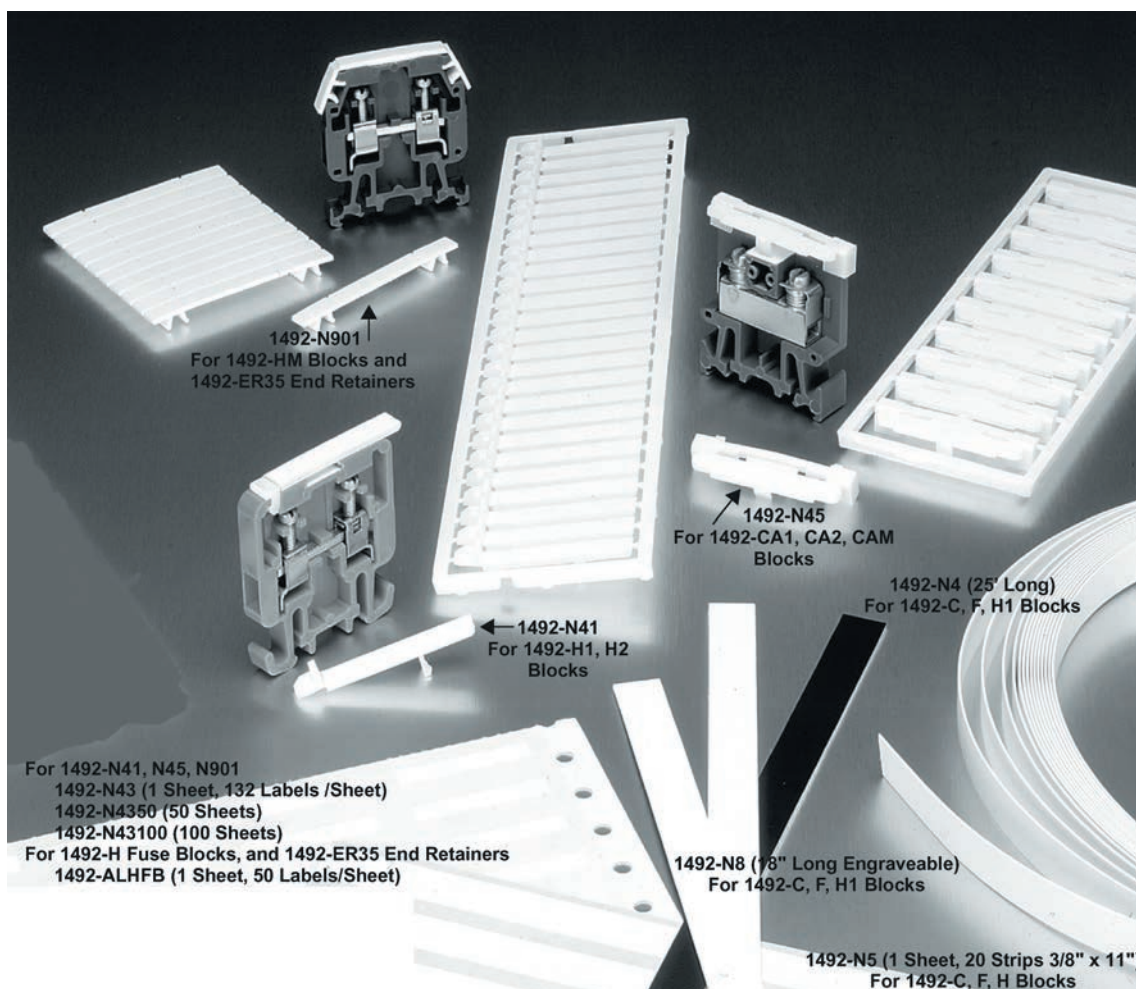




Cat. No. 1492-N901 For 1492-HM Blocks and 1492-ER35 End Retainers

Cat. No. 1492-N45 For 1492-CA1, CA2, CAM Blocks

Cat. No. 1492-N41 For 1492-H1, H2 Blocks

Cat. No. 1492-N8 (18 in. Long Engraveable) For 1492-C, F, H1 Blocks

For Cat. Nos. 1492-N41, N45, N901

Cat. No. 1492-N43 (1 Sheet, 132 Labels /Sheet)

Cat. No. 1492-N4350 (50 Sheets)

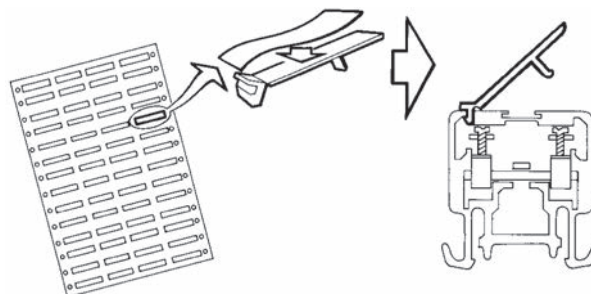
Cat. No. 1492-N43100 (100 Sheets)

For Cat. Nos. 1492-H Fuse Blocks, and 1492-ER35 End Retainers


Cat. No. 1492-ALHFB (1 Sheet, 50 Labels/Sheet)

Cat. No. 1492-N5 (1 Sheet, 20 Strips 3/8 in x 11 in) For 1492-C, F, H Blocks

Placement of Label on Holder



Marker Cards



Cat. No.	No. of Labels/Card
1492-MS8X12	70
1492-MN81	—
1492-MN83	—




Cat. No.	Pkg Qty.
1492-ALHFB	1
1492-ALWFB	1
1492-N4	1
1492-N5	1
1492-N8	25
1492-N41	50
1492-N43	1
1492-N45	20
1492-N901	50
1492-N4350	1
1492-N43100	1




Allen-Bradley

www.ab.com/catalogs Preferred availability cat. nos. are **bold**.

Publication A117-CA001A-EN-P

	1492-JKD4TW			1492-JKD4Q			1492-H7		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.									
Specifications	Feed-through terminal block with knife disconnect; 3 connection points, 2 on one side			Feed-through terminal block with knife disconnect; 2 connection points on each side			Handle-style isolating terminal block		
Certifications		CSA	IEC		CSA	IEC		CSA	IEC
Voltage Rating	600V AC/DC		500V AC/DC	600V AC/DC		500V AC/DC	300V AC/DC	300V AC/DC	500V AC/DC
Maximum Current	25 A		30 A	25 A		30 A	15 A	15 A	15 A
Wire Range (Rated Cross Section)	#30...10 AWG		0.5...4 mm ²	#30...10 AWG		0.5...4 mm ²	#30...10 AWG		0.5...4.0 mm ²
Fuse Size (Dummy Fuse Supplied)	—			—			1/4 x 1-1/4 in.		
Wire Strip Length	0.39 in. (10 mm)			0.39 in. (10 mm)			0.38 in. (9.7 mm)		
Recommended Tightening Torque	6.2 lb•in (0.7 N•m)			6.2 lb•in (0.7 N•m)			7.1 lb•in (0.8 N•m)		
Density	49 pcs/ft (163 pcs/m)			49 pcs/ft (163 pcs/m)			33 pcs/ft (109 pcs/m)		
Housing Temperature Range	-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)			-40...+221 °F (-40...+105 °C)		
Short-Circuit Current Rating	See page 12-42								
Terminal Blocks		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.
Color: Grey	Grey	1492-JKD4TW	50		1492-JKD4Q	50		—	—
With Test Points	Grey	1492-JKD4TWTP	50		1492-JKD4QTP	50		—	—
	Black	—	—		—	—		1492-H7	25
Accessories		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.
Mounting Rails:									
3 ft Scored A-B Rail		—	—		—	—		1492-N1	20
3 ft Rigid A-B Rail		—	—		—	—		1492-N22	20
3 ft Rigid Rise A-B Rail		—	—		—	—		1492-N44	2
Standoff Brackets (use every 12 in.) 		—	—		—	—		1492-N25	2
1 m Symmetrical DIN (Steel)		199-DR1	10		199-DR1	10		199-DR1	10
1 m Symmetrical DIN (Aluminum)		1492-DR5	10		1492-DR5	10		1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)		1492-DR6	2		1492-DR6	2		1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2		1492-DR7	2		1492-DR7	2
End Barrier	Grey	1492-EBJ4TW	50		1492-EBJ4Q	50		1492-N37	50
	Yellow	1492-EBJ4TW-Y	50		1492-EBJ4Q-Y	50		—	—
End Anchors and Retainers:									
A-B Rail — Heavy Duty		—	—		—	—		1492-N23	10
A-B Rail — Normal Duty		—	—		—	—		1492-N47	50
Screwless End Retainer		1492-ERL35	20		1492-ERL35	20		1492-ERL35	20
DIN Rail - Normal Duty		1492-EAJ35	100		1492-EAJ35	100		1492-EAJ35	100
DIN Rail - Heavy Duty		1492-EAHJ35	50		1492-EAHJ35	50		1492-EAHJ35	50
Jumpers:									
Plug-in Center Jumper — 41-pole		1492-CJLJ6-41	10		1492-CJLJ6-41	10		—	—
Plug-in Center Jumper — 10-pole		1492-CJLJ6-10	20		1492-CJLJ6-10	20		—	—
Plug-in Center Jumper — 4-pole		1492-CJLJ6-4	60		1492-CJLJ6-4	60		—	—
Plug-in Center Jumper — 3-pole		1492-CJLJ6-3	60		1492-CJLJ6-3	60		—	—
Plug-in Center Jumper — 2-pole		1492-CJLJ6-2	60		1492-CJLJ6-2	60		—	—
Uninsulated Side Jumper — 10-Pole		—	—		—	—		1492-N49	10
Side Jumper — Insulating Sleeve		—	—		—	—		1492-SJS	10
Other Accessories:									
Partition Plate		—	—		—	—		—	—
Marking Systems:									
Snap-in marker cards		1492-MR6X12 (120/card)	5		1492-MR6X12 (120/card)	5		1492-MS8X12 (56/card)	5
Snap-in marker cards		1492-M6X12 (120/card)	5		1492-M6X12 (120/card)	5		1492-MS8X9 (56/card)	5
Adhesive Labels		—	—		—	—		1492-ALHFB (50/sheet)	1

* For use with 1492-N22 DIN rail only.

1492-H...			1492-WFB4...		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block. 					
Specifications			Single-circuit fusible terminal block with or without fuse indication.		
Certifications			 CSA IEC		
Voltage Rating			Single-circuit fuse block with or without fuse indication.		
H6/WFB4			300V AC/DC		
H5/WFB424			10...57V AC/DC		
H4/WFB4250			100...300V AC		
Maximum Current			15 A		
Wire Range (Rated Cross Section)			#30...12 AWG		
Wire Strip Length			0.38 in. (9.7 mm)		
Recommended Tightening Torque			7.1 lb•in (0.8 N•m)		
Density			33 pcs/ft (109pcs /m)		
Housing Temperature Range			-40...+195 °F (-40...+90 °C)		
Indicator Type					
H6/WFB4			Non-Indicating		
H5/WFB424			Red LED		
H4/WFB4250			Neon		
Leakage Current					
H6/WFB4			—		
H5/WFB424			2 mA @ 24V		
H4/WFB4250			2 mA @ 300V		
Fuse Size (Not Supplied)			1/4 x 1-1/4 in.		
Short-Circuit Current Rating			See page 12-42		
Terminal Blocks			Cat. No.		
Black No-indication			1492-H6		
Color: Black w/LED			1492-H5		
Black w/Neon			1492-H4		
Accessories			Cat. No.		
Mounting Rails:			Pkg Qty.		
1 m Symmetrical DIN (Steel)			10		
1 m Symmetrical DIN (Aluminum)			10		
1 m Hi-Rise Sym. DIN (Aluminum)			2		
1 m Angled Hi-Rise Sym. DIN (Steel)			2		
3 ft Scored A-B Rail			20		
3 ft Rigid A-B Rail			20		
3 ft High Rise A-B Rail			2		
Standoff Brackets (Use Every 12 in.)			2		
End Barrier			50		
End Anchors and Retainers:			Cat. No.		
Screwless End Retainer			1492-ERL35		
DIN Rail — Normal Duty			1492-EAJ35		
DIN Rail — Heavy Duty			1492-EAHJ35		
A-B Rail — Heavy Duty			1492-N23		
10-Pole Side Jumper			1492-N49		
Side Jumper Insulating Sleeve			1492-SJS		
Other Accessories:			Cat. No.		
Partition Plate			1492-PPSL3		
Marking Systems:			Pkg Qty.		
Snap-In Marker Card — For Base Block			5		
For Handle			5		
Adhesive Labels			1		

* IEC standards for 5 x 20 mm fuses do not include ratings above 6.3 A.
 * Cat. No. 1492-N49 is uninsulated. Cat. No. 1492-SJFB8-10 is insulated.