

IEC Control and Load Switches

Product Selection/Catalog Number Explanation

Bulletin 194L Control and Load Switches

Base/DIN Rail Mounting	Front/Door Mounting	Base/DIN Rail Mounting	Front/Door Mounting	Front/Door Mounting
				
12...25 A Base Mount	12...25 A Front Mount	32 A and 40 A Base Mount	32 A and 40 A Front Mount	32 A and 40 A Front Mount, for use with 22.5 mm mounting hole style handle

Catalog Number Explanation

194L – A 16 – 175 3

a *b* *c* *d*

a

Installation Type	
Code	Description
A	Base/DIN Mounting
E	Front/Door Mounting
C	Front/Door Mounting (For use with 32 A and 40 A switches only. Use when selecting 22.5 mm hole-mounting style handle.)

b

Load Size			
Code	Description	Code	Description
12	12 A	25	25 A
16	16 A	32	32 A
20	20 A	40	40 A

c

Code	Function	Configuration	Use with Switch Style*	Circuit Diagram Ref. No.
150	On/Off	2-Position (60 degrees)	194L-E, 12...40 A, 1...6 poles	1501...1506
175		2-Position (90 degrees)	194L-E or 194L-A, 12...40 A, 1...6 poles	1751...1756
178		2-Position (90 degrees-inverted)	194L-E or 194L-A, 12...40 A, 1...4 poles	1781...1784
225	Change-Over	1-2 (without 0, 45 degrees)	194L-E, 12...40 A, 1...5 poles or 194L-A, 12...40 A, 1...2 poles	2251...2255
250		1-2 (without 0, 60 degrees)	194L-E, 12...40 A, 1...5 poles	2501...2505
300		1-0-2 (with 0, 30 degrees, spring return)	194L-E, 12 A, 1...3 poles	3001...3003
325		1-0-2 (with 0, 45 degrees)	194L-E or 194L-A, 12...40 A, 1...4 poles	3251...3254
326		1-0-2 (with 0, 45 degrees, spring return)	194L-E, 12 A, 1...3 poles	3261...3263
350		1-0-2 (with 0, 60 degrees)	194L-E, 12...40 A, 1...4 poles	3501...3504
375		1-0-2 (with 0, 90 degrees)		3751...3754
425	Step Switch	1-2-3 (45 degrees)	194L-E or 194L-A, 12...40 A, 1 pole 194L-E, 12...40 A, 2...3 poles	4251...4253
426		1-2-3-4 (45 degrees)	194L-E, 12...40 A, 1...3 poles 194L-A, 12...40 A, 2 poles	4261...4263
427		1-2-3-4-5 (45 degrees)	194L-E or 194L-A, 12...40 A, 1 pole	4271
428		1-2-3-4-5-6 (45 degrees)		4281
450		1-2-3 (60 degrees)	194L-E, 12...40 A, 1...3 poles	4501...4503
451		1-2-3-4 (60 degrees)		4511...4513
452		1-2-3-4-5 (60 degrees)	194L-E, 12...40 A, 1 pole	4521
453		1-2-3-4-5-6 (60 degrees)		4531
500		0-1-2-3-4 (30 degrees)	194L-E, 12...40 A, 1...3 poles	5001...5003
501		0-1-2-3-4-5 (30 degrees)		5011...5013
525		0-1-2 (45 degrees)	194L-E or 194L-A, 12...40 A, 1 pole 194L-E, 12...40 A, 2...3 poles	5251...5253
526		0-1-2-3 (45 degrees)		5261...5263
527		0-1-2-3-4 (45 degrees)		5271...5273
528		0-1-2-3-4-5 (45 degrees)		5281...5283
550		0-1-2 (60 degrees)		5501...5503
551		0-1-2-3 (60 degrees)	194L-E, 12...40 A, 1...3 poles	5511...5513
552		0-1-2-3-4 (60 degrees)		5521...5523
553		0-1-2-3-4-5 (60 degrees)		5531...5533
725	Star-Delta (Wye-Delta)	0-Y-Δ (45/90 degrees)	194L-E or 194L-A, 12...40 A, 3 poles	7253
732		0-Y-Δ (45/90 degrees)		7323
750	Reversing	0-Y-Δ (60 degrees)	194L-E, 12...40 A, 3 poles	7503
730		1-0-2 (45 degrees)	194L-E or 194L-A, 12...40 A, 3 poles	7303
754		1-0-2 (60 degrees)	194L-E, 12...40 A, 3 poles	7543
825		0-RN-SN-TN-TR-ST-RS (45 degrees)		8251
827	Voltmeter	0-RS-ST-TR (45 degrees)	194L-E or 194L-A, 12 A, 1 pole	8271
875	Ammeter	0-1-2-3 (90 degrees)		8751
876		0-1-2-3-4 (90 degrees)		8761
877		0-1 (90 degrees inverted)		8771

d

No. of Poles	
Code	Description
1	1 Pole
2	2 Poles
3	3 Poles
4	4 Poles
5	5 Poles
6	6 Poles


* Not all possible configurations are available. Some configurations may have longer delivery times and minimum order quantities.

* When choosing front mount style 194L-E for 32 A or 40 A, use the 194L-C code only if a 194L-HC style handle is being used.


Allen-Bradley

www.ab.com/catalogs Preferred availability cat. nos. are **bold**.

Publication A117-CA001A-EN-P



Bulletin 194L IEC Control and Load Switches

- 12, 16, 20, 25, 32, and 40 A inductive load-rated switch
- IP66 water spray and dustproof handles
- IP20 finger-safe terminals
- Switches available for OFF-ON, changeover, star-delta (wye-delta), reversing, ammeter, voltmeter and step switch configurations
- 1...6-Pole versions
- Front/door- or base/ DIN Rail-mounting configurations
- Thermoplastic enclosures IP66
- Suitable as motor disconnect (UL 508)

Bulletin 194L control and load switches are flexible, adaptable, time- and space-saving devices. Switches are available as front/door- or Base/DIN rail-mounting versions. Uniformly styled handles, featuring marked legend plates, are available in Selector-Knob, Disk-Style, Rectangular-Style and Key-Operated versions. Selector-Knob versions are available in three sizes. Most handles are available in grey/black or red/yellow and have padlockable versions.

A new thermoplastic enclosure features constructions of impact-resistant ABS or corrosion resistant NORLYL materials. Both shallow and deep versions include 35 mm DIN mounting Rail, grounding and neutral terminals, and captive cover screws. Enclosures may be ordered with or without cover openings for handle mounting. Enclosures are rated for use in IP66 (UL Type 1, 3, 3R, 12) environments.

Table of Contents

Product Overview	this page
Product Selection	2-435
Accessories	2-440
Switching Diagrams ..	2-442
Specifications	2-448
Approximate Dimensions	2-449

Standards Compliance

IEC 60947-3 Low-voltage switchgear and control gear part 3
 UL 508
 CSA: C22.2 No. 14

Certifications

UL Listed (File No. E14841, Guide NLRV)
 CSA Certified (LR 13908)
 Meets IEC, VDE and BS Standard requirements
 CE

Product Overview



OFF-ON Switch

OFF-ON Switch

Two-position switch used to connect or disconnect a variety of inductive loads including: solenoids, handles, valves, magnetic starters and relays.



Star-Delta (Wye-Delta) Switch

Star-Delta (Wye-Delta) Switch

Three-position (Off-Wye-Delta) switch used to manually control reduced-voltage motor starting. Operating the switch manually changes the wiring configuration of the motor from a star configuration to delta configuration after the controller operator has determined that the motor is up to operating speed.



Ammeter Switch

Ammeter Switch

Multi-position switch used to connect one or more phases of an electrical supply to an ammeter, so that the current in each phase can be displayed on one ammeter.



Step Switch

Step Switch

Multi-position switch used to connect a variety of loads to an electrical supply in a pre-determined logical sequence. A typical application would be temperature control of a heating oven or furnace.



Changeover Switch

Changeover Switch

Two-position switch used in control applications to change between alternate power supplies. This device can typically be used to manually switch power supplies from a primary source to a stand-by/emergency supply in the event of a power outage.



Voltmeter Switch

Voltmeter Switch

Multi-position switch used to connect two lines of the electrical supply system to a voltmeter so that the voltage between the lines (phase-to-phase or phase-to-neutral) can be displayed on one voltmeter.



Reversing Switch

Reversing Switch

Three-phase, three-position (Forward-Off-Reverse) switch used to manually control a motor's direction of rotation. Operating the switch changes the wiring configuration of the motor to operate in the forward or reverse direction.

Bulletin 194L


IEC Control and Load Switches

Switching Diagrams

Circuit Diagram Nos. 1501...4253

Contact target tables: X = Contact Closed
[Blank] = Contact Open

2

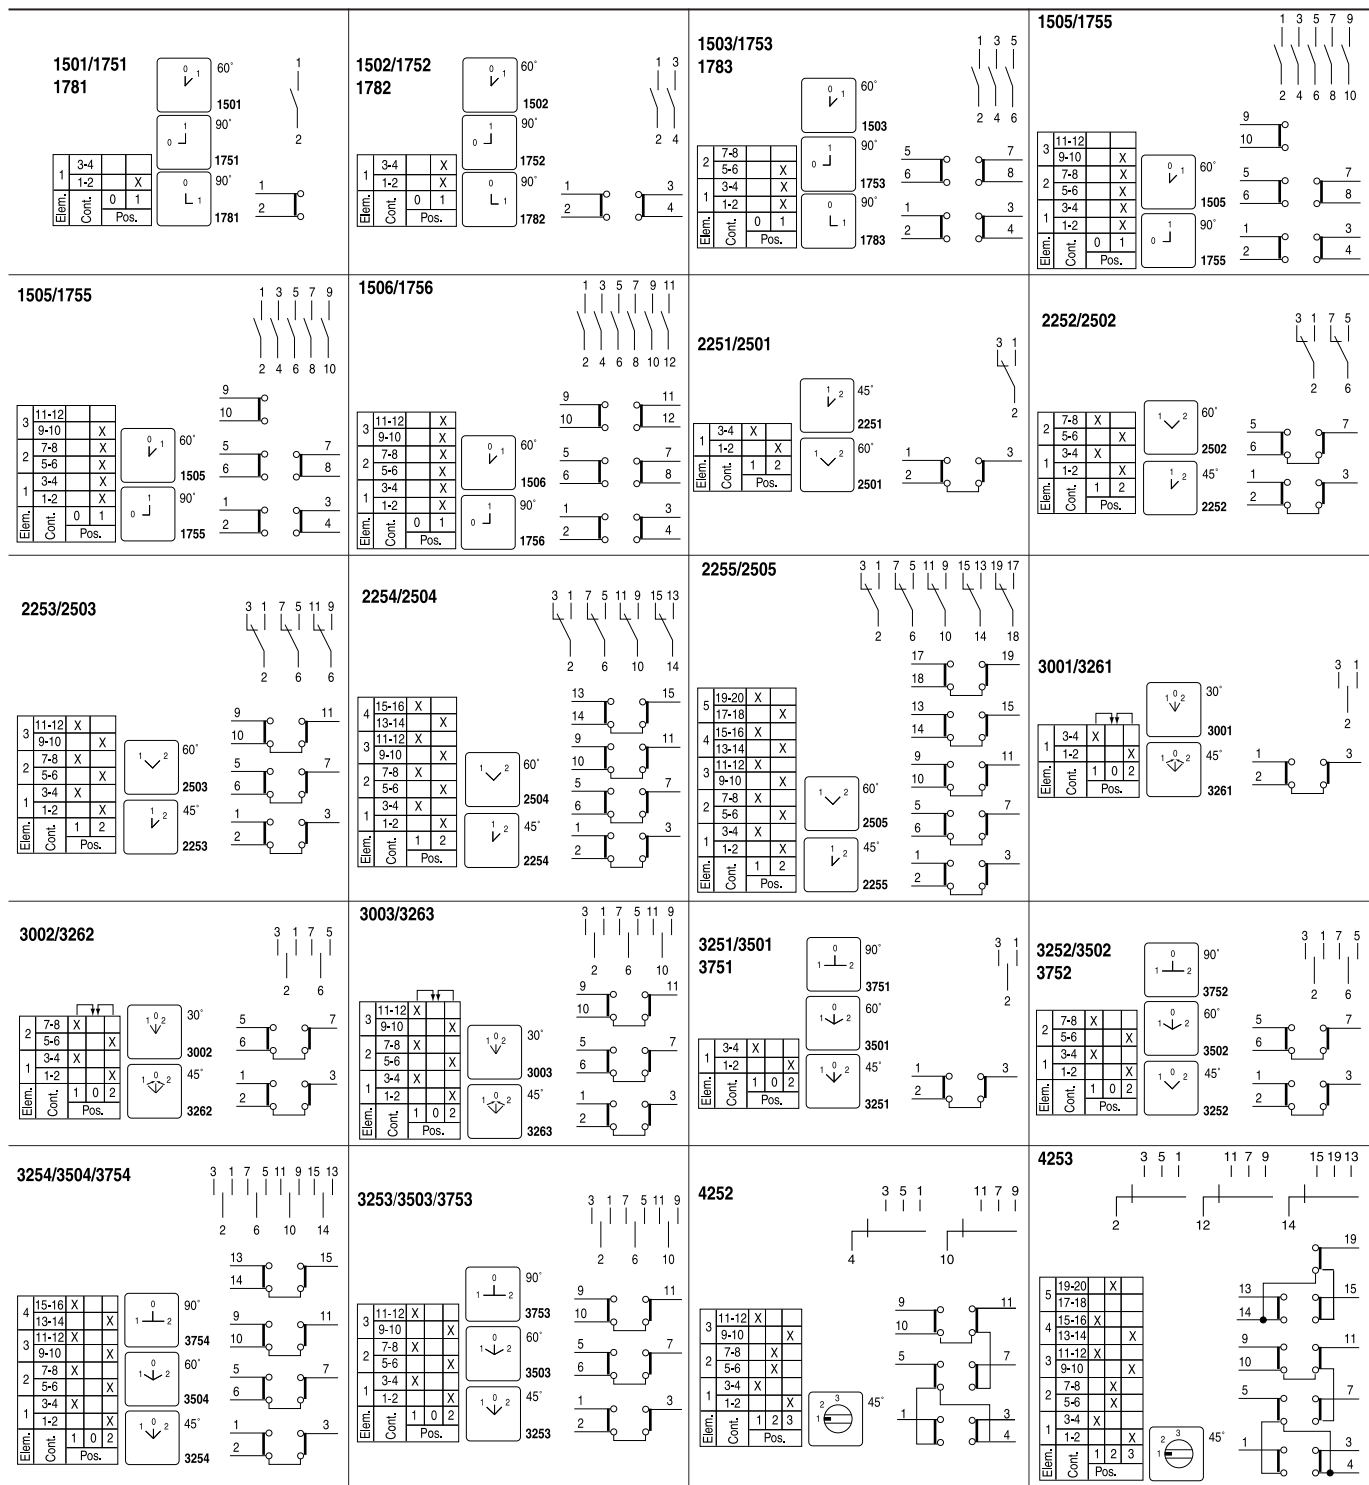

Bulletin 194L
IEC Control and Load Switches
 Specifications

Electrical Ratings

Performance Data								12 A	16 A	20 A	25 A	32 A	40 A		
IEC Applications															
Rated voltage U_e ★		IEC-947						[V]	690	690	690	690	690	690	
Isolating conditions acc. to VDE fulfilled up to rated impulse voltage U_{imp}								[kV]	6	6	6	6	8	8	
Thermal rated current I_{th} ★ 40 °C		IEC-947						[A]	16	20	25	30	32	45	
Thermal rated current I_{the} 60 °C		IEC-947						[A]	12	16	20	25	32	45	
Rated current I_e ★															
AC-1/ AC-21A	Non-inductive or slightly inductive loads/ switching of resistive loads with slight overload	IEC-947 690V						[A]	12	16	20	25	32	40	
AC-1	Non-inductive or slightly inductive loads	SEV 660V						[A]	12	16	20	25	32	40	
AC22A	Switching of mixed resistive and inductive loads with slight overload	IEC-947 220...500V 690V						[A] [A]	12 12	16 16	20 20	25 25	32 32	40 40	
AC-15	Switching of inductive drives, motors, valves, and electromagnets.	IEC-947 220...240V 380...415V 500V						[A] [A] [A]	5 3 2	6 4 2.5	7 5 3	8 6 4	—	—	
DC switching capacity		Contacts in series													
Rated current I_e															
Rated Voltage [V]		1	2	3	4	5	6	8							
		24	48	72	96	120	144	192	[A]	12	16	20	22	—	—
		48	96	144	192	240	288	384	[A]	10	12	16	18	—	—
		60	120	180	240	300	360	450	[A]	8	10	12	14	32	40
DC-21A	For resistive loads, T ≤ 1ms	110	220	330	440	550	660	—	[A]	2	2.5	4	5	—	—
		220	440	660	—	—	—	—	[A]	0.5	0.6	0.7	0.8	—	—
U_e max = 600V		440	—	—	—	—	—	—	[A]	0.4	0.4	0.5	0.5	—	—
Rated making/breaking capacity (= 1.5 x I_e)															
		25.2	50.4	75.6	100.8	126	151.2	201.6	[A]	18	24	30	33	—	—
1.05 x Rated voltage [V]		50.4	100.8	151.2	201.6	252	302.4	403.2	[A]	15	21	24	27	—	—
For resistive loads, T I_{th} 1ms		63	126	189	252	315	378	504	[A]	12	18	18	21	48	60
		115.5	231	346.5	462	577.5	—	—	[A]	3	4.5	6	7.5	—	—
U_e max = 600V		231	462	—	—	—	—	—	[A]	0.75	1.12	1.05	1.2	—	—
		462	—	—	—	—	—	—	[A]	0.52	0.78	0.47	0.75	—	—
Rated current I_e															
Rated voltage [V]		24	48	72	96	120	144	192	[A]	8	10	12	14	16	16
		30	60	90	120	150	180	240	[A]	4.5	5.5	7	8	—	—
For inductive loads T = 50 ms		48	96	144	192	240	288	384	[A]	1.5	2	2.5	3	8	8
Rated voltage [V]		60	120	180	240	300	360	450	[A]	1	1.2	1.5	1.8	4.8	4.8
		110	220	330	440	550	660	—	[A]	0.4	0.5	0.6	0.7	2	2
		220	—	—	—	—	—	—	[A]	—	—	—	—	0.6	0.6
Rated making/breaking capacity (= 1.1 x I_e)															
1.1 x Rated voltage [V]		26.4	52.8	79.2	105.6	132	158.4	184.8	[A]	8.8	11	13.2	1.54	—	17.6
		33	66	99	132	165	198	231	[A]	4.95	6.05	7.7	8.8	—	—
For inductive loads T = 50 ms		52.8	105.6	158.4	211.2	264	316.8	369.6	[A]	1.65	2.2	2.75	3.3	8.8	8.8
U_e max = 600V		66	132	198	264	330	396	462	[A]	1.1	1.32	1.65	1.98	5.28	5.28
		121	242	363	484	605	—	—	[A]	4.95	6.05	7.7	8.8	2.2	2.2
Power Lost								[W]	0.3	0.5	0.6	0.9	0.8	1.4	
Rated power P_e		Contacts in series													
		24				1			[kW]	0.12	0.15	0.20	0.25	0.30	0.30
		24				2			[kW]	0.20	0.25	0.30	0.37	—	—
		48				2			[kW]	0.25	0.30	0.37	0.50	0.50	0.50
		48				3			[kW]	0.30	0.37	0.50	0.75	—	—
Rated voltage [V]		60				2			[kW]	0.25	0.30	0.37	0.50	1.00	1.00
DC-23A, DC-3, DC-5		60				4			[kW]	0.37	0.50	0.75	1.00	—	—
For inductive loads, T ≤1 ms		110				4			[kW]	0.50	0.75	1.00	1.20	—	—
		110				6			[kW]	1.00	1.20	1.40	1.60	—	—
		220				4			[kW]	0.37	0.50	0.75	1.00	—	—
		220				6			[kW]	1.00	1.20	1.40	1.50	—	—

* See standards compliance listed on page page 2-428.

* 32 and 40 A data for one contact in series.

www.ab.com/catalogs Preferred availability cat. nos. are **bold**.



Electrical Ratings

Performance Data, Continued				12 A	16 A	20 A	25 A	32 A	40 A
IEC Applications, Continued									
Rated making/breaking capacity (= 4 x I _g)		Contacts in series							
DC-23A, DC-3, DC-5 For inductive loads, T ≤ 7.5 ms	Rated Voltage [V]	25.2	1	[A]	20.0	25.0	33.3	41.6	50.0
		25.2	2	[A]	33.3	41.6	50.0	61.6	—
		50.4	2	[A]	21.0	25.0	30.8	41.6	41.6
		50.4	3	[A]	25.0	30.8	42.0	62.4	—
		63	2	[A]	16.6	20.0	24.6	33.2	66.6
		63	4	[A]	24.6	33.3	50.0	66.4	—
		115.5	4	[A]	18.1	27.2	36.4	44.0	—
		115.5	6	[A]	36.4	43.6	51.0	58.2	—
		231	4	[A]	6.7	9.1	13.6	18.2	—
		231	6	[A]	18.1	21.8	25.2	27.2	—
Rated breaking capacity			at 220V	[A]	72	96	128	176	296
			0.45 [cos φ]						
			at 380V	[A]	72	96	128	176	280
			0.45 [cos φ]						
			at 660V	[A]	53	72	86	112	196
			0.45[cos φ]						
Rated power P _e *		IEC-947							
AC-2	Slip-ring motors: starting, reversing and electric braking; star/delta starting	3 Ø 3-pole	240V	[kW]	3	4	5.5	5.5	—
			380V	[kW]	5.5	7.5	9	13	—
			415V	[kW]	5.5	7.5	9	13	—
			440V	[kW]	5.5	7.5	9	13	—
			500V	[kW]	7.5	10	11	15	—
			660V	[kW]	7.5	10	11	15	—
AC-3	Squirrel-cage motors: starting and stopping of running motors	3 Ø 3-pole	220...240V	[kW]	2.2	3	4.5	5.5	7.5
			380...440V	[kW]	4	5.5	7.5	11	15
			500V	[kW]	5.5	7.5	10	13	—
			660V	[kW]	5.5	7.5	8	11	18.5
		1 Ø 2-pole	110V	[kW]	0.75	1.1	1.2	1.6	—
			220...240V	[kW]	1.3	2.2	2.5	3.2	4
AC-4	Squirrel-cage motors: starting, reversing, electric braking, inching	3 Ø 3-pole	380...440V	[kW]	2.2	3.7	4.5	5.5	8
		1 Ø 2-pole	110V	[kW]	0.18	0.37	0.55	0.75	—
			240V	[kW]	0.37	0.75	1.5	2.2	—
			380V	[kW]	0.75	1.1	1.8	3	—

* See standards compliance listed on page 2-428.

Bulletin 194L
IEC Control and Load Switches
 Specifications

Electrical Ratings

Performance Data, Continued					12 A	16 A	20 A	25 A	32 A	40 A
IEC Applications, Continued										
AC-23A	Occasional switching of motors and other highly inductive loads (criterion for selecting main switches)	IEC-947 3Ø 3-pole	220...240V	[kW]	2.2	3	4.5	5.5	11	11
			380...440V	[kW]	4	5.5	7.5	11	18.5	22
			500V	[kW]	5.5	7.5	10	13	—	—
			660V	[kW]	5.5	7.5	8	11	22	22
		1Ø 2-pole	110V	[kW]	0.75	1.1	1.2	1.6	—	—
			220...240V	[kW]	1.3	2.2	2.5	3.2	5.5	5.5
			380...440V	[kW]	2.2	3.7	4.5	5.5	11	11
Short-circuit ratings		(gL characteristic)								
	Rated short-time current (1s)			[kA _{rms}]	0.48	0.48	0.6	0.75	0.8	0.8
	Strongest series fuse, not in enclosure			[A]	20*	20*	20*	25*	35	40
	Conditional rated short-circuit			[kA]	6	6	5	5	5	5
Switch Rate		electrical		[ops/h]	120	120	120	120	120	120
CSA and UL Applications										
Rated Voltage U _e				[V AC]	600	600	600	600	600	600
Ampere Rating	Pilot Duty General Use	Contact class		[A]	A600	A600	—	—	—	—
		Non-inductive or slightly inductive load*				12	16	20	25	32
Rated power P _e ‡		UL (CSA)			(FLA)	(FLA)	(FLA)	(FLA)		
Standard motor DOL rating (similar to AC-3)		3Ø 3-pole	120V	[Hp]	1 (7.2)	1.5 (12)	2 (13.6)	3 (19.2)	5 (30.4)	5 (30.4)
			240V	[Hp]	2 (6.8)	3 (9.6)	4 (12.4)	6 (18)	7.5 (22)	10 (28)
			480V	[Hp]	5 (7.6)	7.5 (11)	8 (11.6)	12 (17)	20 (27)	25 (34)
			600V	[Hp]	5 (6.1)	7.5 (9)	10 (11)	15 (17)	20 (22)	25 (27)
		1Ø 2-pole	120V	[Hp]	0.5 (9.8)	.75 (13.8)	1 (16)	1.5 (20)	2 (24)	2 (24)
			240V	[Hp]	1 (8.0)	1.5 (10.0)	2 (12)	3 (17)	5 (28)	5 (28)
			480V	[Hp]	2 (6.0)	3 (8.5)	4 (11.2)	6 (17)	7.5 (21)	10 (26)
			600V	[Hp]	3 (6.8)	3 (6.8)	5 (11.2)	7.5 (16)	10 (20)	15 (27)
Heavy motor load, reversing Rating (similar to AC-4)		3Ø	120V	[Hp]	—	—	—	—		
Max. back-up fuse		3-pole	240V	[Hp]	—	—	—	—		
		(gG characteristic)		[A]	35	55	60	80		
Short Circuit Ratings	Maximum Short Circuit Prospective Fault Current			[kA]	5	5	5	5		
				[A]	35	55	60	80		
Switching Rate		electrical		[ops/h]	120	120	120	120	120	120

Mechanical Data

Performance Data			12/16 A	20/25 A	32/40 A
Protection class acc. to IEC 529	Handles Switch Bodies		IP66	IP66	IP66
			IP20	IP20	IP20
Mechanical Endurance		[mil.ops]	1	1	1
Switching rate	mechanical	[ops/h]	1200	1200	1200
Maximum Wire Gauges					
	rigid wire	AWG	(2)18...12	(2)16...10	(2)12...8
		[mm²]	(2)1...2.5	(2)1.5...6	(2)4...10
	fine strands	AWG	(2)18...12	(2)16...10	(2)14...10
		[mm²]	(2)1...2.5	(2)1.5...4	(2)2.5...6

Environmental Data

Performance Data		12/16/20/25 A	32/40 A
Ambient temperature			
Operation		–25...+60 °C (–13...+140 °F)	–25...+60 °C (–13...+140 °F)
		–40...+80 °C (–40...+176 °F)	–40...+80 °C (–40...+176 °F)


* Does not apply to switches in enclosure.

* Suitable for switching off-load (AC-20) above 660V, but only up to 660V for switches with screws at the rear.

† See standards compliance listed on page page 2-434.



Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

Cat. No. 194L-C... for Central Fixing (194L-HC...)


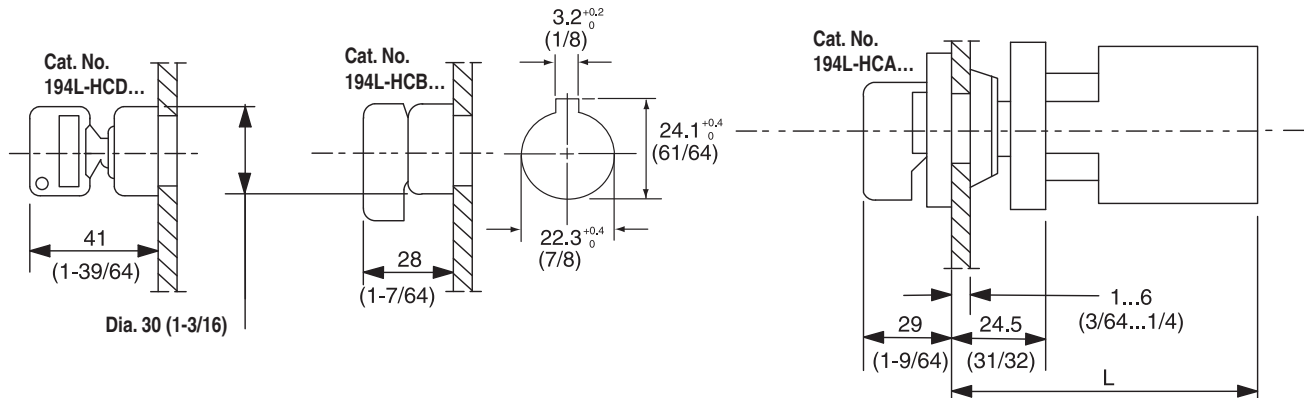


Cat. No.	L				
	No. of Contacts				
	1...2	3...4	5...6	7...8	9...10
194L-C32/40...	86 (3-25/64)	103.5 (4-5/64)	121 (4-49/64)	138.5 (5-29/64)	156 (6-9/64)

Cat. No. 194L... for Front (Door) Installation

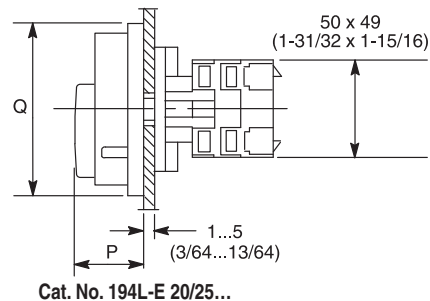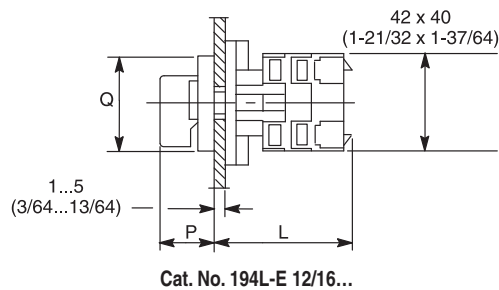

Mounting Dimensions

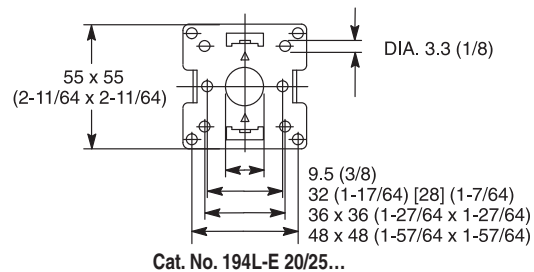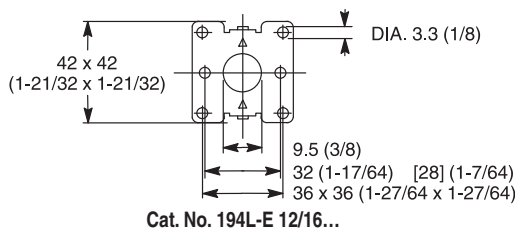

Cat. No.	L				
	No. of Contacts				
	1...2	3...4	5...6	7...8	9...10
194L-E12/16...	44 (1-47/64)	54 (2-1/8)	64 (2-33/64)	74 (2-29/32)	84 (3-5/16)
194L-E20/25...	44.5 (1-3/4)	57 (2-1/4)	69.5 (2-3/4)	82 (3-15/64)	94.5 (3-23/32)
194L-E32/40...	43 (1-11/16)	58.5 (2-5/16)	76 (2-63/64)	93.5 (3-11/16)	111 (4-3/8)

Bulletin 194L

IEC Control and Load Switches


Approximate Dimensions

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

Control Knob

Cat. No.	P	Q
194L-HE4A...	28 (1-7/64)	48 (1-57/64) x 48 (1-57/64)
194L-HE4I...		48 (1-57/64) x 62 (2-7/16)
194L-HE4S...		64 (2-33/64) x 64 (2-33/64)
194L-HE6A...		64 (2-33/64) x 78 (3-5/64)
194L-HE6I...		67 (2-41/64) x 67 (2-41/64)
194L-HE6S...	34 (1-11/32)	67 (2-41/64) x 67 (2-41/64)
194L-HE6N...		
194L-HE6G...		

Cat. No. 194L-A... for Base/DIN Rail Installation

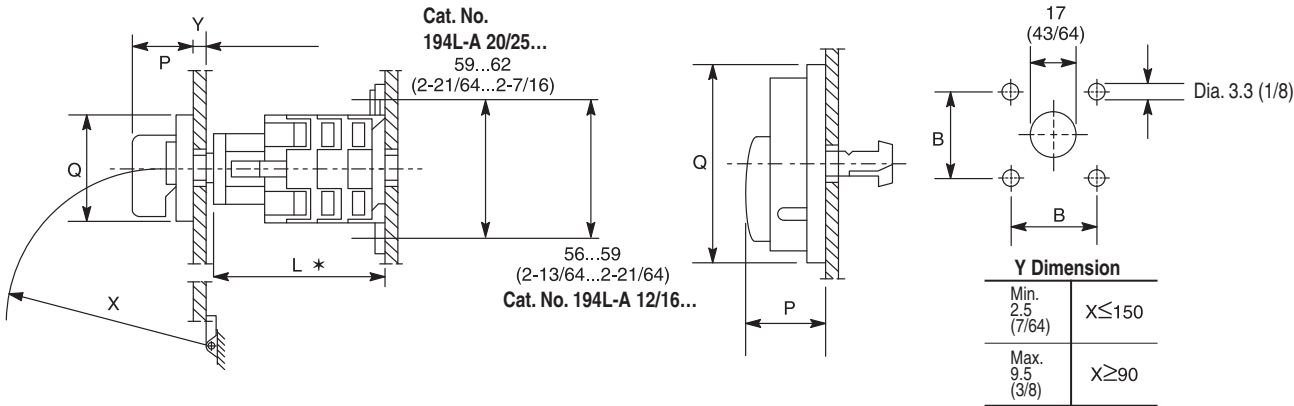

Cat. No.	L *			
	No. of Contacts			
	1...2	3...4	5...6	7...8
194L-A12/16...	58 (2-9/32)	68 (2-11/16)	78 (3-5/64)	88 (3-15/32)
194L-A20/25...	58 (2-9/32)	71.5 (2-13/16)	84 (3-5/16)	96.5 (3-51/64)
194L-A32/40...	67.5 (2-21/32)	85 (3-11/32)	102.5 (4-1/32)	120 (4-47/64)


Control Knob

Cat. No.	P	B	Q
194L-HE4A...	28 (1-7/64)	36 (1-27/64)	48 (1-57/64) x 48 (1-57/64)
194L-HE4I...			48 (1-57/64) x 62 (2-7/16)
194L-HE4S...		48 (1-57/64)	64 (2-33/64) x 64 (2-33/64)
194L-HE6A...			64 (2-33/64) x 78 (3-5/64)
194L-HE6I...			67 (2-41/64) x 67 (2-41/64)
194L-HE6S...			
194L-HE6N...	34 (1-11/32)		
194L-HE6G...			

* With DIN 46 277 (35) Rail + 2.5 mm (7/64)

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

Cat. No. 194L-A... With Shaft Extension Cat. No. 194L-G2853

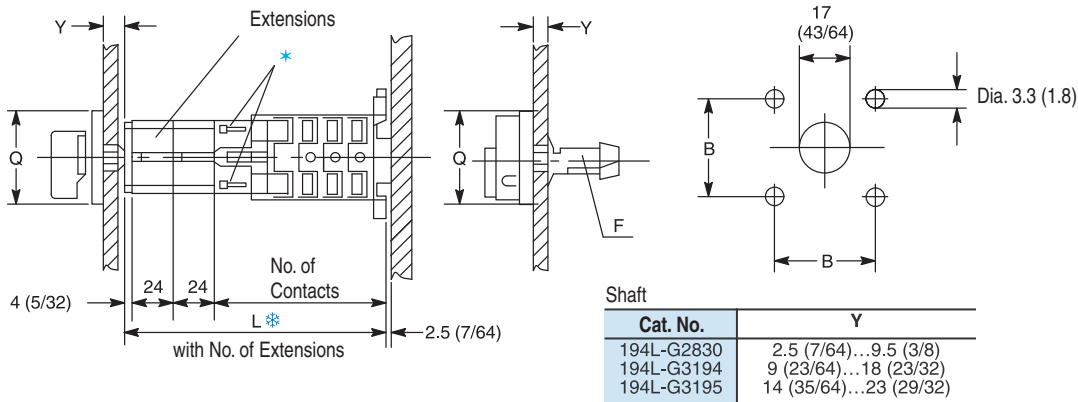

No. of Extensions	Cat. No. 194L-A12/16... 10mm (0.39)				Cat. No. 194L-A20/25... 12.5mm (0.49)				Cat. No. 194L-A32/40			
	L											
	No. of Contacts											
	1...2	3...4	5...6	7...8	1...2	3...4	5...6	7...8	1...2	3...4	5...6	7...8
With 1 extension	82 (3-15/64)	92 (3-5/8)	102 (4-1/64)	112 (4-13/32)	83 (3-17/64)	95.5 (3-49/64)	108 (4-1/4)	120.5 (4-3/4)	91.5 (3-15/64)	108 (4-1/4)	126.5 (5-63/64)	144 (6-43/64)
With 2 extensions	106 (4-11/64)	116 (4-37/64)	126 (4-31/32)	136 (5-23/64)	107 (4-7/32)	119.5 (4-45/64)	132 (5-13/64)	144.5 (5-11/16)	115.5 (5-35/64)	133 (5-15/64)	150.5 (6-5/16)	168 (7-5/8)
With 3 extensions	130 (5-1/8)	140 (5-33/64)	150 (5-29/32)	160 (6-19/64)	131 (5-5/32)	143.5 (5-21/32)	156 (6-9/64)	168.5 (6-5/8)	135.5 (5-11/32)	157 (6-3/16)	174.5 (7-7/8)	182 (8-9/16)
With 4 ★ extensions	154 (6-1/16)	164 (6-15/32)	174 (6-55/64)	184 (7-15/64)	155 (6-7/64)	167.5 (6-19/32)	180 (7-3/32)	192.5 (7-37/64)	163.5 (6-7/16)	181 (7-1/8)	198.5 (8-53/64)	216 (9-33/64)
With 5 ★ extensions	178 (7-1/64)	188 (7-13/32)	198 (7-51/64)	208 (8-3/16)	179 (7-3/64)	191.5 (7-35/64)	204 (8-1/32)	216.5 (8-33/64)	187.5 (7-3/8)	205 (8-5/64)	222.5 (9-49/64)	240 (9-29/64)
With 6 ★ extensions	202 (7-61/64)	212 (8-23/64)	222 (8-3/4)	232 (9-1/8)	203 (7-63/64)	215.5 (8-31/64)	228 (8-63/64)	240.5 (9-15/32)	211.5 (8-21/64)	229 (12)	246.5 (10-23/32)	264 (10-13/32)

Control Knob

Cat. No.	Q	B
194L-HE4A...	48 (1-57/64) x 48 (1-57/64)	36 (1-27/64)
194L-HE4I...		
194L-HE6A...	64 (2-33/64) x 64 (2-33/64)	48 (1-57/64)
194L-HE6I...		
194L-HE6N...	67 (2-41/64) x 67 (2-41/64)	
194L-HE6G...		

* When more than 4 modules are used, attach the first one to the switch body using the screws supplied with the extension (Cat. No. 194L-G2853).
 * Mounting on DIN 46 277 (35) Rails.


Bulletin 194L

IEC Control and Load Switches

Approximate Dimensions

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

Cat. No. 194L-A... With Metal Shafts

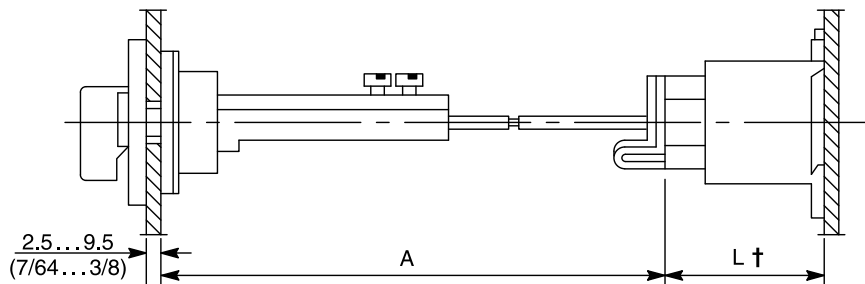

Cat. No.	A
194L-G3393...	110 (4-21/64)...235 (9-1/4)
194L-G3394...	230 (9-1/16)...350 (13-25/32)

Cat. No.	L*			
	No. of Contacts			
	1...2	3...4	5...6	7...8
194L-A12/16...	54 (2-1/8)	64 (2-33/64)	74 (2-29/32)	84 (3-5/16)
194L-A20/25...	55 (2-11/64)	67.5 (2-21/32)	80 (3-5/32)	92.5 (3-41/64)
194L-A32/40...	63.5 (2-31/64)	81 (3-3/16)	88.5 (3-7/8)	116 (4-9/16)

Modular Shaft Extensions (Cat. No. 194L-G2853)

Select No. of Extension Modules and Shaft for use with enclosures.

No. of Extension Modules	Required End Shaft	Enclosure Mounting Depth†	
		Cat. No. 194L-A12/16...	Cat. No. 194L-A20/25...
0	44 (1-47/64) §	71.5...77.5 (2-13/16...3-1/16)	75...80.5 (2-61/64...3-11/64)
	52 (2-3/64)	77...87 (3-1/32...3-27/64)	80...90 (3-5/32...3-35/64)
	57 (2-1/4)	82...92 (3-15/64...3-5/8)	85...95 (3-11/32...3-3/4)
1	44 (1-47/64) §	95.5...101.5 (3-49/64...4)	99...105 (3-29/32...4-9/64)
	52 (2-3/64)	97.5...111 (3-27/32...4-3/8)	101...114.5 (3-63/64...4-33/64)
	57 (2-1/4)	102.5...116 (4-3/64...4-37/64)	106...119.5 (4-11/64...4-45/64)
2	44 (1-47/64) §	119.5...125.5 (4-45/64...4-61/64)	123...129 (4-27/32...5-5/64)
	52 (2-3/64)	121.5...135 (4-51/64...5-5/16)	125...138.5 (4-59/64...5-29/64)
	57 (2-1/4)	126.5...140 (4-63/64...5-33/64)	130...143.5 (5-1/8...5-21/32)
3	44 (1-47/64) §	143.5...149.5 (5-21/32...5-57/64)	147...153 (5-51/64...6-1/32)
	52 (2-3/64)	145.5...159 (5-47/64...6-17/64)	149...162.5 (5-7/8...6-13/32)
	57 (2-1/4)	150.5...164 (5-15/16...6-15/32)	154...167.5 (6-1/16...6-19/32)
4	44 (1-47/64) §	167.5...173.5 (6-19/32...6-27/32)	171...177 (6-47/64...6-31/32)
	52 (2-3/64)	169.5...183 (6-43/64...7-13/64)	173...186.5 (6-13/16...7-11/32)
	57 (2-1/4)	174.5...188 (6-7/8...7-13/32)	178...191.5 (7-1/64...7-35/64)
5	44 (1-47/64) §	191.5...197.5 (7-35/64...7-25/32)	195...201 (7-43/64...7-59/64)
	52 (2-3/64)	193.5...207 (7-5/8...8-5/32)	197...210.5 (7-49/64...8-19/64)
	57 (2-1/4)	198.5...212 (7-53/64...8-23/64)	202...215.5 (7-61/64...8-31/64)
6	44 (1-47/64) §	215.5...221.5 (8-31/64...8-23/32)	219...225 (8-5/8...8-55/64)
	52 (2-3/64)	217.5...231 (8-37/64...9-3/32)	221...234.5 (8-45/64...9-15/64)
	57 (2-1/4)	222.5...236 (8-49/64...9-19/64)	226...239.5 (8-29/32...9-7/16)


* When more than 4 modules are used, attach the first one to the switch body using the screws supplied with the extension (Cat. No. 194L-G2853).


§ With DIN 46 277 (35) Rail + 2.5 mm (7/64)


† For DIN Rail-mounted devices, remember to deduct the offset distance provided by the rail. For example, deduct 2.5 mm (7/64 in.) from the mounting depth for Bulletin 194L switch body mounted on DIN 46277 rail.

§ One 44 mm (1-47/64 in) end shaft is supplied with all Bulletin 194L Switch Bodies.

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

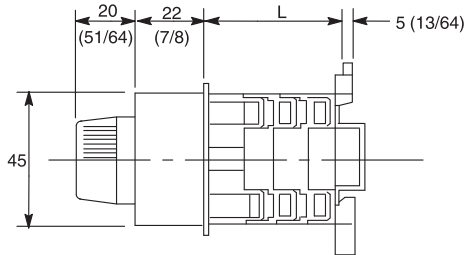
Cat. No. 194L-A... With Cat. No. 194L-HE4P... Installation on DIN 46277 (35 mm) Rails + 2.5 mm (7/64 in.)	Cat. No.	L			
		No. of Contacts			
		1...2	3...4	5...6	7...8
	194L-A12/16...	35 (1-3/8)	45 (1-49/64)	55 (2-11/64)	65 (2-9/16)
	194L-A20/25...	33.5 (1-21/64)	48 (1-57/64)	60.5 (2-3/8)	73 (2-7/8)
	194L-A32/40...	43 (1-11/16)	61 (2-13/32)	79 (3-7/64)	97 (3-53/64)

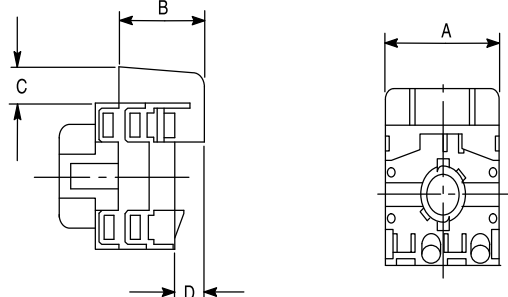Cat. No. 194L-E... With Terminal Cover	Cat. No.	A	B	C	D
	194L-E12/16...	40 (1-37/64)	42.5 (1-43/64)	12 (15/32)	2.5 (7/64)
	194L-E20/25...	49 (1-15/16)	37.5 (1-31/64)	12 (15/32)	2.5 (7/64)
	194L-E32/40...	59 (2-21/64)	50 (1-31/32)	15 (19/32)	2.5 (7/64)

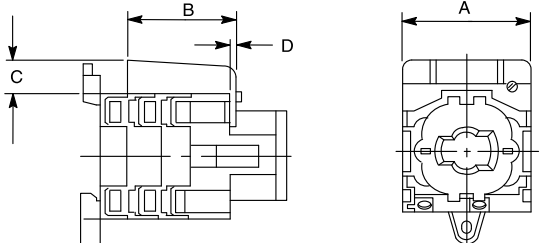
Cat. No. 194L-A... With Terminal Cover	Cat. No.	A	B	C	D
	194L-A12/16...	40 (1-37/64)	42.5 (1-43/64)	12 (15/32)	2.5 (7/64)
	194L-A20/25...	49 (1-15/16)	37.5 (1-31/64)	12 (15/32)	2.5 (7/64)
	194L-A32/40...	63.5 (2-1/2)	49 (1-53/64)	12 (15/32)	2 (5/64)

Enclosure

Cat. No. 194L-G3572...Cat. No. 194L-G3579

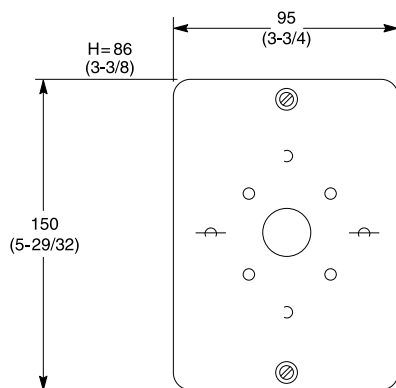

Cat. No. 194L-G3572/G3576
 G3574/G3578

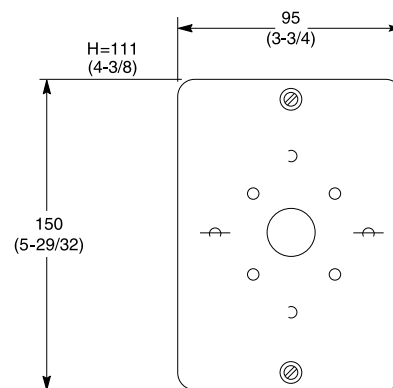

Cat. No. 194L-G3573/G3577
 G3575/G3579



Allen-Bradley

www.ab.com/catalogs Preferred availability cat. nos. are **bold**.

Publication A117-CA001A-EN-P