








1492-CAM2			1492-CD2		1492-CE2		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.							
	1.44" (36.6 mm)		1.35" (34.3 mm)		1.72" (43.7 mm)		
	1.5" (38.1 mm)		1.5" (38.1 mm)		1.75" (44.45 mm)		
	0.41" (10.31 mm)		0.55" (13.89 mm)		0.75" (19.05 mm)		
Specifications	Terminal block, tubular screw without pressure plate, multi-rail mountable.		Terminal block, tubular screw without pressure plate.		Terminal block, tubular screw without pressure plate.		
Certifications	UL/CSA		UL/CSA		UL/CSA		
Voltage Rating	600V AC/DC		600V AC/DC		600V AC/DC		
Maximum Current	55 A		100 A		195 A		
Wire Range (Rated Cross Section)	#18...#8 AWG (1...10 mm ²)		#14...#4 AWG (2.5...25 mm ²)		#12...#1/0 AWG (4...50 mm ²)		
Wire Strip Length	0.38 in. (9.7 mm)		0.44 in. (11.2 mm)		0.69 in. (17.5 mm)		
Recommended Tightening Torque	10...16 lb•in (1.1...1.8 N•m)		22...30 lb•in (2.5...3.4 N•m)		50 lb•in (5.6 N•m)		
Density	30 pcs/ft (98 pcs/m)		22 pcs/ft (72 pcs/m)		16 pcs/ft (52 pcs/m)		
Insulation Temperature Range	-40...+221 °F (-40...+105 °C)		-40...+221 °F (-40...+105 °C)		-40...+221 °F (-40...+105 °C)		
Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	
Color:	White	1492-CAM2	50	1492-CD2	50	1492-CE2	10
	Two 3 ft Rails White	—	—	1492-CD2130(65/Rail)	1	—	—
	Red	1492-CAM2RE	50	1492-CD2RE	50	1492-CE2RE	10
	Blue	1492-CAM2B	50	1492-CD2B	50	1492-CE2B	10
	Black	1492-CAM2BL	50	1492-CD2BL	50	1492-CE2BL	10
	Green	1492-CAM2G	50	1492-CD2G	50	1492-CE2G	10
	Yellow	1492-CAM2Y	50	1492-CD2Y	50	1492-CE2Y	10
	Brown	1492-CAM2BR	50	1492-CD2BR	50	1492-CE2BR	10
	Violet	1492-CAM2VT	50	1492-CD2VT	50	1492-CE2VT	10
	Grey	1492-CAM2GY	50	1492-CD2GY	50	1492-CE2GY	10
	Orange	1492-CAM2OR	50	1492-CD2OR	50	1492-CE2OR	10
Accessories page 12-109	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	
Mounting Rails:							
A-B Rail	1492-N1	20	1492-N1	20	1492-N1	20	
3 ft Rigid A-B Rail	1492-N22	20	1492-N22	20	1492-N22	20	
3 ft High-Rise A-B Rail	—	—	1492-N44	2	1492-N44	2	
Standoff Brackets (use every 12 in.)	1492-N25	2	1492-N25	2	1492-N25	2	
1 m Symmetrical DIN	199-DR1	10	—	—	—	—	
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	—	—	—	—	
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	—	—	—	—	
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	—	—	—	—	
End Barrier	1492-NM16	50	1492-N16	50	1492-N17	50	
End Anchors:							
A-B Rail	1492-N23	10	1492-N23	10	1492-N23	10	
A-B Rail — Normal Duty	1492-N47	50	1492-N47	50	1492-N47	50	
A-B Rail — Retaining Clip — Light Duty	1492-N2	50	—	—	—	—	
DIN Rail — Normal Duty	1492-EAJ35	100	—	—	—	—	
DIN Rail — Heavy Duty	1492-EAHJ35	50	—	—	—	—	
Jumpers:							
2-pole Uninsulated	1492-N3	50	—	—	1492-N21	10	
50-pole Uninsulated	1492-N30	10	—	—	—	—	
Fanning Strip (12-pole can cut to desired length)	1492-N20	1	—	—	—	—	
Marking Systems	1492-N45	20	1492-N8	25	1492-N45	25	

Short-Circuit Current Ratings — Fuse Ratings

Cat. No.	Wire CU AWG		Overcurrent Protection Fuse Required Class/Max. Amp Rating						Maximum Voltage	SCCR, RMS SYM [A]
	Line	Load	J	T	RK1	RK5	G	CC		
1492-CAM1	14...8	14...8	60	60	30	—	50	30	600	100,000
1492-CD2	14...4	14...4	100	100	60	30	60	30	600	100,000
1492-CE2	12...1/0	12...1/0	100	100	60	30	60	30	600	100,000

1492-CA3			1492-CD3		1492-CD8	
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.						
	Terminal block, screw terminal with #6 screw.		Terminal block, screw terminal with #8 screw.		Terminal block, screw terminal with wire clamp.	
	Specifications		Specifications		Specifications	
	Certifications		Certifications		Certifications	
Voltage Rating		Voltage Rating		Voltage Rating		
Maximum Current		Maximum Current		Maximum Current		
Wire Range (Rated Cross Section)		Wire Range (Rated Cross Section)		Wire Range (Rated Cross Section)		
Wire Strip Length		Wire Strip Length		Wire Strip Length		
Recommended Tightening Torque		Recommended Tightening Torque		Recommended Tightening Torque		
Density		Density		Density		
Insulation Temperature Range		Insulation Temperature Range		Insulation Temperature Range		
Terminal Blocks		Terminal Blocks		Terminal Blocks		
Color:		Color:		Color:		
Two 3 ft Rails White		Two 3 ft Rails White		Two 3 ft Rails White		
Red		Red		Red		
Blue		Blue		Blue		
Black		Black		Black		
Green		Green		Green		
Yellow		Yellow		Yellow		
Brown		Brown		Brown		
Violet		Violet		Violet		
Grey		Grey		Grey		
Orange		Orange		Orange		
Accessories (page 12-109)		Accessories (page 12-109)		Accessories (page 12-109)		
Mounting Rails:		Mounting Rails:		Mounting Rails:		
A-B Rail		A-B Rail		A-B Rail		
3 ft Rigid A-B Rail		3 ft Rigid A-B Rail		3 ft Rigid A-B Rail		
3 ft High-Rise A-B Rail		3 ft High-Rise A-B Rail		3 ft High-Rise A-B Rail		
Standoff Brackets (use every 12 in.)		Standoff Brackets (use every 12 in.)		Standoff Brackets (use every 12 in.)		
End Barrier		End Barrier		End Barrier		
End Anchors:		End Anchors:		End Anchors:		
A-B Rail		A-B Rail		A-B Rail		
A-B Rail — Snap-On		A-B Rail — Snap-On		A-B Rail — Snap-On		
A-B Rail — Retaining Clip — Light Duty		A-B Rail — Retaining Clip — Light Duty		A-B Rail — Retaining Clip — Light Duty		
Jumpers:		Jumpers:		Jumpers:		
2-pole Uninsulated		2-pole Uninsulated		2-pole Uninsulated		
50-pole Uninsulated		50-pole Uninsulated		50-pole Uninsulated		
Marking Systems		Marking Systems		Marking Systems		

* Prepared conductors utilize ring, spade, or hook connectors.

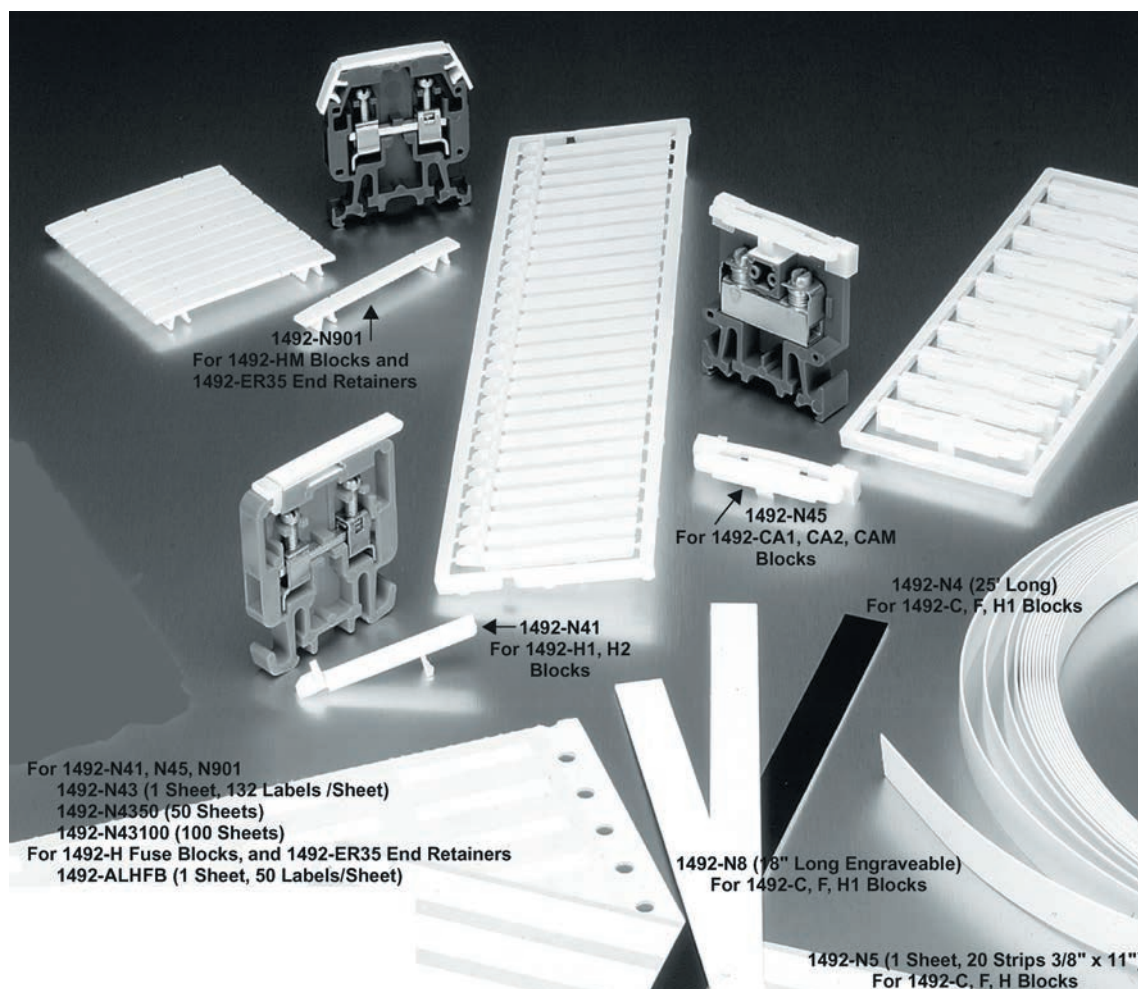

Cat. No. 1492-N901 For 1492-HM Blocks and 1492-ER35 End Retainers

Cat. No. 1492-N45 For 1492-CA1, CA2, CAM Blocks

Cat. No. 1492-N41 For 1492-H1, H2 Blocks

Cat. No. 1492-N8 (18 in. Long Engraveable) For 1492-C, F, H1 Blocks

For Cat. Nos. 1492-N41, N45, N901

Cat. No. 1492-N43 (1 Sheet, 132 Labels /Sheet)

Cat. No. 1492-N4350 (50 Sheets)


Cat. No. 1492-N43100 (100 Sheets)

For Cat. Nos. 1492-H Fuse Blocks, and 1492-ER35 End Retainers


Cat. No. 1492-ALHFB (1 Sheet, 50 Labels/Sheet)

Cat. No. 1492-N5 (1 Sheet, 20 Strips 3/8 in x 11 in) For 1492-C, F, H Blocks

Placement of Label on Holder

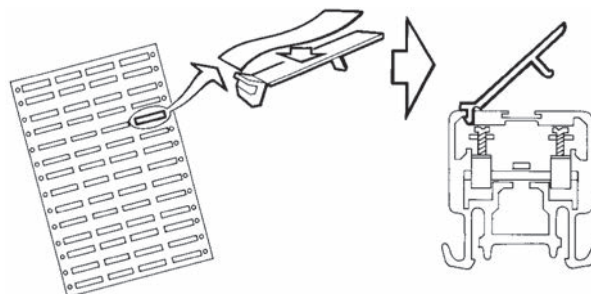

Marker Cards



Cat. No.	No. of Labels/Card
1492-MS8X12	70
1492-MN81	—
1492-MN83	—

Cat. No.	Pkg Qty.
1492-ALHFB	1
1492-ALWFB	1
1492-N4	1
1492-N5	1
1492-N8	25
1492-N41	50
1492-N43	1
1492-N45	20
1492-N901	50
1492-N4350	1
1492-N43100	1



Allen-Bradley

www.ab.com/catalogs Preferred availability cat. nos. are **bold**.

Publication A117-CA001A-EN-P