
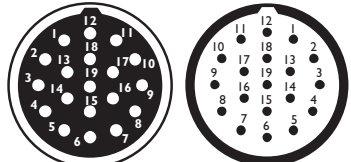


Pinout and Color Code

Color Code	Face View Pinout					
	9-, 11-, or 12-Pin			19-Pin		
						
A	9-Pin 1 Brown 5 NA 9 Pink 2 NA 6 Green 10 Red 3 Blue 7 Yellow 11 NA 4 White 8 Grey 12 Green/Yellow			1 Violet 7 Grey/Pink 13 Yellow/Brown 2 Red 8 White/Green 14 Brown/Green 3 Grey 9 White/Yellow 15 White 4 Red/Blue 10 White/Grey 16 Yellow 5 Green 11 Black 17 Pink 6 Blue 12 Green/Yellow 18 Grey/Brown 19 Brown		
B	11-Pin 1 White 5 Pink 9 Blue 2 Green 6 Red 10 Blue 3 Yellow 7 Black 11 Brown 4 Grey 8 Violet 12 Green/Yellow			—		
C	12-Pin 1 Brown 5 Red 9 Black 2 Blue 6 Yellow 10 Violet 3 Grey 7 White 11 Grey/Pink 4 Pink 8 Red/Blue 12 Green			—		

Product Selection

Cordsets

Pin Count	Color Code	Jacket Color	Assembly Rating	Cat. No.			
				Straight Female	Right Angle Female	Straight Male	Right Angle Male
9-Pin	A	Yellow	18 AWG	889M-F12X9AE-*	889M-R12X9AE-*	—	—
11-Pin	B	Black	3/18 & 8/22 AWG	889M-F11RM-*	889M-R11RM-*	889M-U11RM-*	889M-V11RM-*
12-Pin	C	Yellow	18 AWG	889M-F12AH-*	889M-R12AH-*	—	—
19-Pin	A	Black	3/18 & 16/22 AWG	889M-F19RM-*	889M-R19RM-*	889M-U19RM-*	889M-V19RM-*

Patchcords

Pin Count	Jacket Color	Assembly Rating	Cat. No.			
			Straight Female Straight Male	Straight Female Right Angle Male	Right Angle Female Straight Male	Right Angle Female Right Angle Male
11-Pin	Black	3/18 & 8/22 AWG	889M-F11RMMU- ‡	889M-F11RMMV- ‡	889M-R11RMMU- ‡	889M-R11RMMV- ‡
12-Pin	Yellow	18 AWG	889M-F12AHMU- §	—	—	—
19-Pin	Black	3/18 & 16/22 AWG	889M-F19RMMU- ‡	889M-F19RMMV- ‡	889M-R19RMMU- ‡	889M-R19RMMV- ‡

* Replace symbol with 2 (2 m), 5 (5 m) or 10 (10 m) for standard cable lengths.

‡ Replace symbol with OM3 (0.3 m), 1 (1 m), 2 (2 m), 5 (5 m), or 10 (10 m) for standard cable lengths.

§ Replace symbol with 0M3 (0.3 m), 0M6 (0.6 m), 1 (1 m), 2 (2 m) or 3 (3 m) for standard cable lengths.