




Screw Connection Terminal Blocks

Isolation Blocks

1492-JKD3				1492-JKD3TP			1492-JKD4		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.									
Specifications	Feed through terminal block with knife disconnect			Feed-through terminal block with knife disconnect and test screws			Feed-through terminal block with knife disconnect		
Certifications		CSA	IEC		CSA	IEC		CSA	IEC
Voltage Rating	300V AC/DC		500V AC/DC	300V AC/DC		500V AC/DC	600V AC/DC	300V AC/DC	400V AC/DC
Maximum Current	10 A		24 A	10 A		24 A	22 A	10 A	32 A
Wire Range (Rated Cross Section)	#22...12 AWG		2.5 mm²	#22...12 AWG		2.5 mm²	#22...10 AWG		0.05...4.0 mm²
Fuse Size (Dummy Fuse Supplied)	—			—			—		
Wire Strip Length	0.39 in. (10 mm)			0.39 in. (10 mm)			0.512 in. (13 mm)		
Recommended Tightening Torque	7.1 lb•in. (0.8 N•m)			7.1 lb•in. (0.8 N•m)			9.0 lb•in. (1.0 N•m)		
Density	49 pcs/ft (163 pcs/m)			49 pcs/ft (163 pcs/m)			49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)		
Short-Circuit Current Rating	See page 12-42								
Terminal Blocks	Cat. No.		Pkg Qty.	Cat. No.		Pkg Qty.	Cat. No.		Pkg Qty.
Color:	Grey	1492-JKD3	100	1492-JKD3TP		100	1492-JKD4		100
	Blue	1492-JKD3-B	100	—		—	1492-JKD4-B		100
with Test Points	Grey	—	—	—		—	1492-JKD4TP		100
Accessories	Cat. No.		Pkg Qty.	Cat. No.		Pkg Qty.	Cat. No.		Pkg Qty.
Mounting Rails:									
1 m Symmetrical DIN (Steel)	199-DR1		10	199-DR1		10	199-DR1		10
1 m Symmetrical DIN (Aluminum)	1492-DR5		10	1492-DR5		10	1492-DR5		10
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6		2	1492-DR6		2	1492-DR6		2
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7		2	1492-DR7		2	1492-DR7		2
End Barriers	Grey	1492-EBJ3	50	1492-EBJ3		50	1492-EBJ3		50
	Yellow	—	—	—		—	1492-EBJ3-Y		50
End Anchors:									
Screwless End Retainer	1492-ERL35		20	1492-ERL35		20	1492-ERL35		20
DIN Rail — Normal Duty	1492-EAJ35		100	1492-EAJ35		100	1492-EAJ35		100
DIN Rail — Heavy Duty	1492-EAHJ35		50	1492-EAHJ35		50	1492-EAHJ35		50
Jumpers:	1492-CJLJ5-50		10	1492-CJLJ5-50		10	—		—
Plug-in Center Jumper — 50-Pole	—		—	—		—	1492-CJLJ6-41		10
Plug-in Center Jumper — 41-Pole	1492-CJLJ5-10		20	1492-CJLJ5-10		20	1492-CJLJ6-10		20
Plug-in Center Jumper — 10-Pole	1492-CJLJ5-9		20	1492-CJLJ5-9		20	—		—
Plug-in Center Jumper — 9-Pole	1492-CJLJ5-8		20	1492-CJLJ5-8		20	—		—
Plug-in Center Jumper — 8-Pole	1492-CJLJ5-7		20	1492-CJLJ5-7		20	—		—
Plug-in Center Jumper — 7-Pole	1492-CJLJ5-6		20	1492-CJLJ5-6		20	—		—
Plug-in Center Jumper — 6-Pole	1492-CJLJ5-5		20	1492-CJLJ5-5		20	—		—
Plug-in Center Jumper — 5-Pole	1492-CJLJ5-4		60	1492-CJLJ5-4		60	1492-CJLJ6-4		60
Plug-in Center Jumper — 4-Pole	1492-CJLJ5-3		60	1492-CJLJ5-3		60	1492-CJLJ6-3		60
Plug-in Center Jumper — 3-Pole	1492-CJLJ5-2		60	1492-CJLJ5-2		60	1492-CJLJ6-2		60
Plug-in Center Jumper — 2-Pole	1492-SJ5B-24		50	1492-SJ5B-24		50	—		—
Insulated Side Jumper — 24-Pole	1492-SJ5B-10		50	1492-SJ5B-10		50	—		—
Insulated Side Jumper — 10-Pole	—		—	—		—	—		—
Uninsulated Side Jumper — 10-Pole	—		—	—		—	—		—
Side Jumper — Insulating Sleeve	—		—	—		—	—		—
Screw Type Jumper Notching Tool	1492-T1		1	1492-T1		1	—		—
Other Accessories:									
Partition Plate	1492-EBJ16		20	1492-EBJ16		20	1492-EBJ16		20
Test Plug	—		—	1492-TP23		20	—		—
Marking Systems:									
Snap-in marker cards	1492-M5X12 (144/card)		5	1492-M5X12 (144/card)		5	1492-MR6X12 (120/card)		5
Snap-in marker cards	1492-M5X5 (200/card)		5	1492-M5X5 (200/card)		5	1492-M6X12 (120/card)		5

Screw Connection Terminal Blocks

Short-Circuit Current Ratings

Fuse Ratings

Cat. No.	Wire Range Cu [AWG]		Overcurrent Protection Fuse Required Class/Max. Current Rating [A]						Maximum Voltage [V]	SCCR, RMS SYM [A]
	Line	Load	J	T	RK1	RK5	G	CC		
1492-J3	14...12	14...12	30	30	—	—	30	30	600	100,000
1492-J3P										
1492-JD3SS										
1492-JD3										
1492-JD3C										
1492-JG3TW										
1492-JDG3C										
1492-JG3										
1492-J3F	14...12	14...12	30	30	—	—	30	30	300	100,000
1492-J3TW										
1492-JC3										
1492-JDC3										
1492-JKD3										
1492-JD3FB										
1492-JD3F										
1492-JDG3FB										
1492-JD3PSSTP										
1492-JD3PTP										
1492-JDG3P										
1492-JDG3PSS										
1492-JDG3PSSTP										
1492-JDG3PTP										
1492-JDG3										
1492-JD3PSS										
1492-JD3P										
1492-J4	14...10	14...10	60	60	30	—	60	30	600	100,000
1492-JG4										
1492-JKD4										
1492-J4TW										
1492-J4Q										
1492-JG4TW										
1492-JG4Q										
1492-JKD4TW										
1492-JKD4Q										
1492-JKD4TP										
1492-JD4C										
1492-JD4										
1492-JKD4QTP										
1492-JKD4TWTP										
1492-JSD4	14...10	14...10	60	60	30	—	60	30	300	100,000
1492-JKD4										
1492-J4CTB										
1492-J6	14...8	14...8	100	100	60	30	60	30	600	100,000
1492-JG6										
1492-J10	14...6	14...6	100	100	60	30	60	30	600	100,000
1492-JG10										
1492-J16	14...4	14...4	100	100	60	30	60	30	600	100,000
1492-JG16										
1492-J16ND	12...1/0	12...1/0	200	200	100	30	60	30	600	100,000
1492-J35										
1492-JG35	6...1/0	6...1/0	200	200	100	30	60	30	600	100,000
1492-J50										
1492-JG50	1/0...3/0	1/0...3/0	400	400	200	100	60	30	600	100,000
1492-J70										
1492-JG70	4...4/0	4...4/0	400	400	200	100	60	30	600	100,000
1492-J120										
1492-JG120										



Screw Connection Terminal Blocks

Short-Circuit Current Ratings — Overcurrent Ratings

Cat. No.	Wire Range Cu [AWG] (Line and Load)	Overcurrent Protection Device Required	Max. Current [A]	SCCR, RMS Sym A 480Y/277V	SCCR, RMS Sym. A 300V+	
1492-J3TW	14...12	140M-D8E-__	16	65,000	30,000	
1492-JC3		140M-C2E-B10		65,000	30,000	
1492-JDC3		140M-C2E-B16		65,000	30,000	
1492-J3F		140M-C2E-B25		65,000	30,000	
1492-JD3F		140M-C2E-B40		65,000	25,000	
1492-JKD3		140M-C2E-B63		65,000	*	
1492-JD3FB		140M-C2E-A__		65,000	30,000	
1492-JDG3FB		140M-C2E-C10		65,000	*	
1492-JD3PSSTP		140MC2E-C16		30,000	*	
1492-JD3PTP						
1492-JDG3P						
1492-JDG3PSS						
1492-JDG3PSSTP						
1492-JDG3PTP						
1492-JDG3						
1492-JD3P						
1492-JD3PSS		14...10		140M-F8E-__	32	65,000
1492-JKD4	140M-D8E-C10		65,000			30,000
1492-JSD4	140M-D8E-C16		65,000			30,000
	140M-D8E-C20		65,000			*
	140M-D8E-C25		30,000			*
	140M-D8E-B__		65,000			30,000
	140M-C2E-B10		65,000			30,000
	140M-C2E-B16		65,000			30,000
	140M-C2E-B25		65,000			30,000
	140M-C2E-B40		65,000			25,000
	140M-C2E-B63		65,000			*
	140M-C2E-C10		65,000			*
	140M-C2E-C16		30,000			*
	140M-C2E-A__		65,000			30,000

Cat. No.	Wire Range Cu [AWG] (Line and Load)	Overcurrent Protection Device Required	Max. Current [A]	SCCR, RMS Sym A 480V+	SCCR, RMS Sym. A 600Y 347V+
1492-J10	14...10	140M-H8P-__	50	50,000	30,000
1492-JG10					
1492-J16	14...4	140M-H8P-__	100	30,000	30,000
1492-JG16					
1492-J16ND	12...2	140M-H8P-__	100	50,000	30,000
1492-J35					
1492-JG35	2...1/0	140M-H8P-__	150	65,000	30,000
1492-J50					
1492-JG50					

Cat. No.	Wire Range Cu [AWG] (Line and Load)	Overcurrent Protection Device Required	Max. Current [A]	SCCR, RMS Sym A 480V+	SCCR, RMS Sym. A 600V+
1492-J70	4...1/0	140U-J0X3	175	65,000	*
	1/0	140U-J0X3		*	30,000
1492-J120	2...3/0	140U-J0X3	228	65,000	30,000

* Bulletin 140M does not have ratings at this voltage.

+ Voltage terminal block was tested at for respective SCCR


IEC Terminal Block Accessories

Partition and Separation Plates

Partition Plates and Separation Plates

Partition plates allow visual and electrical separation of terminal groups and provide the necessary electrical spacing between adjacent insulated jumpers or between exposed ends of cut jumpers.

Separation plates consist of flexible thermoplastic material and are used between terminal blocks to isolate adjacent center jumpers both visually and electrically.

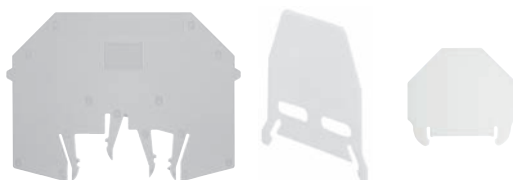

Dimensions Width x Length x Height	For Use With	Color	Pkg Qty.	Cat. No.
Partition Plates				
0.118 x 3.15 x 2.48 in. (3 x 80 x 63 mm)	1492-JD3, JD3C, JD3F, JD3DF, JD3DR, JD3RC..., JD3SS	Grey	20	1492-PPJD3
0.005 x 3.54 x 2.51 in. (0.13 x 90.1 x 63.8 mm)	1492-JD3P..., JDG3P...	Beige	20	1492-PPJD3P
0.08 x 1.57 x 1.20 in. (2 x 40 x 30.5 mm)	1492-WM3, WM4, WMG3, WMG4	Grey	50	1492-PPM3
0.014 x 2.28 x 1.51 in. (0.35 x 58 x 38.3 mm)	1492-WMD1	Grey	50	1492-PPMD1
0.06 x 1.85 x 1.57 in. (1.5 x 47 x 40 mm)	1492-W3, W4, WG4	Grey	50	1492-PP3
0.06 x 2.17 x 1.81 in. (1.5 x 55 x 46 mm)	1492-W6, W10, W16S, W4TW, WG6, WG10S, WG16S	Grey	50	1492-PP10
0.014 x 2.88 x 1.85 in. (0.35 x 73.2 x 47.1 mm)	1492-WTF3..., WTS3...	Beige	50	1492-PPTS3
0.06 x 1.93 x 2.36 in. (1.5 x 49 x 60 mm)	1492-J3, J4, J6, J10, J2Q, J3TW, J3F, JG2Q, JG3, JG3TW, JKD3, JKD3TP, J3P, J3PTP, JTC3	Grey	20	1492-EBJ16
		Blue	20	1492-EBJ16-B
		Yellow	20	1492-EBJ16-Y
Separation Plates				
.014 x 1.76 x 1.57 in. (0.35 x 44.8 x 40.0 mm)	1492-W3, W4	Beige	50	1492-SP3
	All 1492-FPK2 Fuse Plugs	Beige	50	1492-SPJ3

Screwless Center Jumpers



For Use With	Color	Pkg Qty.	Cat. No.
1492-L2..., L2T, L2Q, LD2, LD2C	Yellow	60	1492-CJL4-2
		60	1492-CJL4-3
		60	1492-CJL4-4
		60	1492-CJL4-5
		20	1492-CJL4-10
1492-LM3, LC3, LDC3, LDAG3, LDG3P, JKD3..., J3P..., J3, J3TW (see Note)	Yellow	60	1492-CJLJ5-2
	Red	60	1492-CJLJ5-2-R
	Blue	60	1492-CJLJ5-2-B
	Black	60	1492-CJLJ5-2-BL
	Yellow	60	1492-CJLJ5-3
	Red	60	1492-CJLJ5-3-R
	Blue	60	1492-CJLJ5-3-B
	Black	60	1492-CJLJ5-3-BL
	Yellow	60	1492-CJLJ5-4
		20	1492-CJLJ5-5
		20	1492-CJLJ5-6
		20	1492-CJLJ5-7
		20	1492-CJLJ5-8
		20	1492-CJLJ5-9
		20	1492-CJLJ5-10
	Red	20	1492-CJLJ5-10-R
	Blue	20	1492-CJLJ5-10-B
	Black	20	1492-CJLJ5-10-BL
	White	20	1492-CJLJ5-10-W
	Yellow	10	1492-CJLJ5-50
	Red	10	1492-CJLJ5-50-R
	Blue	10	1492-CJLJ5-50-B
	Black	10	1492-CJLJ5-50-BL
	White	10	1492-CJLJ5-50-W

For Use With	Pkg Qty.	Cat. No.
1492-RFB4	10	1492-CJR8-2
	10	1492-CJR8-3
	10	1492-CJR8-4
	10	1492-CJR8-5
	10	1492-CJR8-6
	10	1492-CJR8-7
	10	1492-CJR8-8
	10	1492-CJR8-9
	10	1492-CJR8-10
	10	1492-CJRA10-2
1492-RAFB4	10	1492-CJRA10-3
	10	1492-CJRA10-4
	10	1492-CJRA10-5

For Use With	Color	Pkg Qty.	Cat. No.
1492-J4, J4M (see Note)	Yellow	60	1492-CJLJ6-2
	Red	60	1492-CJLJ6-2-R
	Blue	60	1492-CJLJ6-2-B
	Black	60	1492-CJLJ6-2-BL
	Yellow	60	1492-CJLJ6-3
	Red	60	1492-CJLJ6-3-R
	Blue	60	1492-CJLJ6-3-B
	Black	60	1492-CJLJ6-3-BL
	Yellow	60	1492-CJLJ6-4
	Yellow	20	1492-CJLJ6-10
	Red	20	1492-CJLJ6-10-R
	Blue	20	1492-CJLJ6-10-B
	Black	20	1492-CJLJ6-10-BL
	Yellow	10	1492-CJLJ6-41
	Red	10	1492-CJLJ6-41-R
	Blue	10	1492-CJLJ6-41-B
	Black	10	1492-CJLJ6-41-BL
1492-L6, L6T, L16D	Yellow	60	1492-CJL8-2
		60	1492-CJL8-3
		60	1492-CJL8-4
		10	1492-CJL8-32
1492-L10	Yellow	25	1492-CJL10-2
1492-L16	Yellow	25	1492-CJL12-2
1492-L35	Yellow	10	1492-CJL16-2
1492-L3, L3T, L3Q, L3P, LD3, LD3C, LKD3, LTF3, LS2..., L16D	Yellow	60	1492-CJK5-2
		60	1492-CJK5-3
		60	1492-CJK5-4
		20	1492-CJK5-5
		20	1492-CJK5-6
		20	1492-CJK5-7
		20	1492-CJK5-8
		20	1492-CJK5-9
		20	1492-CJK5-10
		10	1492-CJK5-50
		60	1492-CJK6-2
1492-L4, L4T, L4Q, LD4DF, LD4DR, LD4SS, LD4, LD4C, L16D	Yellow	60	1492-CJK6-3
		60	1492-CJK6-4
		20	1492-CJK6-5
		20	1492-CJK6-6
		20	1492-CJK6-7
		20	1492-CJK6-8
		20	1492-CJK6-9
		20	1492-CJK6-10
		20	1492-CJK6-20

Cat. No.	Wire Size [AWG]																		
	#30	#28	#26	#24	#22	#20	#18	#16	#14	#12	#10	#8	#6	#4	#2	#1	1/0	2/0	3/0
	Number of the Same Size Wires Per Terminal																		
1492-JG10	—	—	—	—	4	4	4	4	3	2	1	1	1	—	—	—	—	—	—
1492-JG16	—	—	4	4	4	4	4	4	1	3	2	1	1	1	—	—	—	—	—
1492-JG2Q	—	—	4	4	4	3	1	1	1	—	—	—	—	—	—	—	—	—	—
1492-JG3	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-JG35	—	—	—	—	—	—	—	—	3	3	3	2	2	1	1	1	—	—	—
1492-JG3TW single side)	4	4	4	4	4	4	1	1	1	1	—	—	—	—	—	—	—	—	—
1492-JG3TW twin side)	—	—	4	4	4	3	1	1	1	1	—	—	—	—	—	—	—	—	—
1492-JG4	—	—	—	—	4	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JG4Q	1	1	1	1	4	4	3	3	3	2	1	—	—	—	—	—	—	—	—
1492-JG4TW	1	1	1	1	4	4	3	3	3	2	1	—	—	—	—	—	—	—	—
1492-JG50	—	—	—	—	—	—	—	—	—	—	1	2	2	1	1	1	1	—	—
1492-JG6	—	—	—	—	4	4	3	3	3	2	1	1	—	—	—	—	—	—	—
1492-JG70	—	—	—	—	—	—	—	—	5	5	5	2	2	2	1	1	1	1	—
1492-JKD3	4	4	4	4	3	3	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-JKD3TP	4	4	4	4	3	3	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-JKD4	—	—	—	—	4	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JKD4Q	1	1	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JKD4QTP	1	1	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JKD4TP	—	—	—	—	4	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JKD4TW	1	1	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JKD4TWTP	1	1	1	1	1	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JPO	—	—	4	—	1	1	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-JSD4	—	—	1	1	4	4	3	3	2	1	1	—	—	—	—	—	—	—	—
1492-JT3M	4	4	4	4	4	4	3	3	2	1	—	—	—	—	—	—	—	—	—
1492-W10	—	—	—	—	4	4	4	4	3	2	1	1	—	—	—	—	—	—	—
1492-W16S	—	—	—	—	—	—	—	—	4	3	2	2	1	1	—	—	—	—	—
1492-W3	4	—	—	—	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-W4	—	—	—	—	4	4	3	2	2	1	1	—	—	—	—	—	—	—	—
1492-W6	—	—	—	—	4	4	3	2	2	1	1	—	—	—	—	—	—	—	—
1492-WD4	—	—	—	—	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-WD4C	—	—	—	—	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-WG4	—	—	—	—	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-WG6	—	—	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—
1492-WM3	4	—	—	—	4	3	2	1	1	—	—	—	—	—	—	—	—	—	—
1492-WM4	—	—	—	—	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-WMD1	—	—	—	—	2	1	1	1	—	—	—	—	—	—	—	—	—	—	—
1492-WMG4	—	—	—	—	4	4	3	2	2	1	—	—	—	—	—	—	—	—	—
1492-WR3	—	—	—	—	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-WTF3	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-WTF3LN	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-WTF3LP	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-WTS3	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-WTS3LN	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—
1492-WTS3LP	—	—	4	4	4	4	3	2	1	—	—	—	—	—	—	—	—	—	—